Revised Final

Remedial Investigation Report for Soil, Sediment, and Surface Water at RVAAP-50 Atlas Scrap Yard Version 2.0

Former Ravenna Army Ammunition Plant
Portage and Trumbull Counties, Ohio

Contract No. W912QR-15-C-0046

Prepared for:

US Army Corps of Engineers®

U.S. Army Corps of Engineers
Louisville District

Prepared by:

leidos

Leidos
8866 Commons Boulevard, Suite 201
Twinsburg, Ohio 44087

August 4, 2017

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE *(DD-MM-YYYY)*	2. REPORT TYPE	3. DATES COVERED *(From - To)*
04-08-2017	Technical	Oct 1998-Aug 2017

4. TITLE AND SUBTITLE

Revised Final
Remedial Investigation Report for Soil, Sediment, and Surface Water at
RVAAP-50 Atlas Scrap Yard
Version 2.0
Former Ravenna Army Ammunition Plant
Portage and Trumbull Counties, Ohio

5a. CONTRACT NUMBER

W912QR-15-C-0046

5b. GRANT NUMBER

NA

5c. PROGRAM ELEMENT NUMBER

NA

6. AUTHOR(S)

Thomas, Jed H., P.E.

5d. PROJECT NUMBER

NA

5e. TASK NUMBER

NA

5f. WORK UNIT NUMBER

NA

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Leidos
8866 Commons Boulevard
Twinsburg, Ohio 44087

8. PERFORMING ORGANIZATION REPORT NUMBER

14-027(E)/080417

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

USACE - Louisville District
U.S. Army Corps of Engineers
600 Martin Luther King Jr., Place
P.O. Box 59
Louisville, Kentucky 40202-0059

10. SPONSOR/MONITOR'S ACRONYM(S)

USACE

11. SPONSOR/MONITOR'S REPORT NUMBER(S)

NA

12. DISTRIBUTION/AVAILABILITY STATEMENT

Reference distribution page.

13. SUPPLEMENTARY NOTES

None.

14. ABSTRACT

This Remedial Investigation Report for Atlas Scrap Yard presents physical characteristics, geology, and hydrogeology of Atlas Scrap Yard; compiles historical and newly acquired environmental data; summarizes nature and extent of contamination in soil; evaluates contaminant fate and transport; and provides human health and ecological risk assessments to present chemicals of concern presenting unacceptable risk for evaluation in a Feasibility Study.


15. SUBJECT TERMS

Cleanup goals, risk assessment, weight of evidence, nature and extent, fate and transport

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Nathaniel Peters, II
U	U	U	U	27,331	19b. TELEPHONE NUMBER *(Include area code)* 502-315-2624

CONTRACTOR STATEMENT OF INDEPENDENT TECHNICAL REVIEW

Leidos has completed the Remedial Investigation Report for Soil, Sediment, and Surface Water at RVAAP-50 Atlas Scrap Yard at the Former Ravenna Army Ammunition Plant, Portage and Trumbull Counties, Ohio. Notice is hereby given that an independent technical review has been conducted that is appropriate to the level of risk and complexity inherent in the project. During the independent technical review, compliance with established policy principles and procedures, utilizing justified and valid assumptions, was verified. This included review of data quality objectives; technical assumptions; methods, procedures, and materials to be used; the appropriateness of data used and level of data obtained; and reasonableness of the results, including whether the product meets the customer's needs consistent with law and existing United States Army Corps of Engineers (USACE) policy. In addition, an independent verification was performed to ensure all applicable changes were made per regulatory and Army comments.



8/4/2017

Jed Thomas, P.E.
Study/Design Team Leader, Main Author

Date



8/4/2017

W. Kevin Jago, P.G.
Independent Technical Review Team Leader

Date

Significant concerns and the explanation of the resolution are as follows:

Internal Leidos Independent Technical Review comments are recorded on a Document Review Record per Leidos standard operating procedure ESE A3.1 Document Review. This Document Review Record is maintained in the project file. Changes to the report addressing the comments have been verified by the Study/Design Team Leader. As noted above, all concerns resulting from independent technical review of the project have been considered.



8/4/2017

Lisa Jones-Bateman
Senior Program Manager

Date

PLACEHOLDER FOR:

Documentation of Ohio EPA Concurrence of Final Document

(Documentation to be provided once concurrence is issued.)

Revised Final

Remedial Investigation Report for Soil, Sediment, and Surface Water at RVAAP-50 Atlas Scrap Yard Version 2.0

Former Ravenna Army Ammunition Plant
Portage and Trumbull Counties, Ohio

Contract No. W912QR-15-C-0046

Prepared for:
U.S. Army Corps of Engineers
Louisville District

Prepared by:
Leidos
8866 Commons Boulevard, Suite 201
Twinsburg, Ohio 44087

August 4, 2017

DOCUMENT DISTRIBUTION
for the
Revised Final Remedial Investigation Report
for Soil, Sediment, and Surface Water
at RVAAP-50 Atlas Scrap Yard
Version 2.0
Former Ravenna Army Ammunition Plant
Portage and Trumbull Counties, Ohio

Name/Organization	Number of Printed Copies	Number of Electronic Copies
Vicki Deppisch, Ohio EPA DERR	1	3
Brian Tucker, Ohio EPA, CO-DERR	1	1
Bob Princic, Ohio EPA NEDO-DERR	Transmittal letter only	
Rodney Beals, Ohio EPA NEDO-DERR	Transmittal letter only	
Tom Schneider, Ohio EPA, SWDO	Transmittal letter only	
Mark Leeper, ARNG-IED Cleanup	0	1
Katie Tait, OHARNG Kevin Sedlak, ARNG	1	1
Craig Coombs, USACE – Louisville District Nathaniel Peters, II, USACE – Louisville District	1	1
Admin Records Manager – Camp Ravenna	2	2
Kevin Jago, Leidos	1	1
Jed Thomas, Leidos	1	1
Pat Ryan, Leidos-REIMS	0	1
Leidos Contract Document Management System	0	1

ARNG = Army National Guard.
CO = Central Office.
DERR = Division of Environmental Response and Revitalization.
IED = Installation and Environment Division.
NEDO = Northeast District Office.
OHARNG = Ohio Army National Guard.
Ohio EPA = Ohio Environmental Protection Agency.
REIMS = Ravenna Environmental Information Management System.
SWDO = Southwest District Office.
USACE = U.S. Army Corps of Engineers.

TABLE OF CONTENTS

LIST OF TABLES vi
LIST OF FIGURES viii
LIST OF PHOTOGRAPHS ix
LIST OF APPENDICES ix
ACRONYMS AND ABBREVIATIONS xi

EXECUTIVE SUMMARY AND UPDATE ES-1
ES.1 INTRODUCTION AND SCOPE ES-1
ES.2 COMMENT RESOLUTION ES-1
ES.3 REMEDIAL INVESTIGATION ES-2
ES.3.1 Fate and Transport Assessment ES-2
ES.3.2 Human Health Risk Assessment ES-3
ES.3.2.1 Lead at the Former Incinerator ES-4
ES.3.2.2 Site-wide PAH Recommendation ES-4
ES.3.3 Ecological Risk Assessment ES-7
ES.4 CONCLUSIONS OF THE REMEDIAL INVESTIGATION ES-7

1.0 INTRODUCTION 1-1
1.1 PURPOSE 1-2
1.2 SCOPE 1-2
1.3 REPORT ORGANIZATION 1-3

2.0 BACKGROUND 2-1
2.1 FACILITY-WIDE BACKGROUND INFORMATION 2-1
2.1.1 General Facility Description 2-1
2.1.2 Demography and Land Use 2-1
2.2 ATLAS SCRAP YARD BACKGROUND INFORMATION 2-2
2.2.1 Operational History 2-2
2.2.2 Potential Sources 2-3
2.2.3 Building Demolition 2-4
2.2.4 AOC Boundary 2-5
2.3 POTENTIAL RECEPTORS AT ATLAS SCRAP YARD 2-5
2.3.1 Human Receptors 2-5
2.3.2 Ecological Receptors 2-6
2.4 CO-LOCATED OR PROXIMATE SITES 2-6
2.4.1 Facility-wide Sewers 2-6
2.4.2 Facility-wide Groundwater 2-7
2.4.3 Munitions Response Sites 2-7
2.4.4 Compliance Restoration Sites 2-8
2.4.4.1 Facility-wide Underground Storage Tanks 2-8
2.4.4.2 Facility-Wide Coal Storage 2-9
2.5 POTENTIAL SITE-RELATED RELEASES 2-9

3.0 ENVIRONMENTAL SETTING 3-1
3.1 CAMP RAVENNA PHYSIOGRAPHIC SETTING 3-1
3.2 SURFACE FEATURES AND AOC TOPOGRAPHY 3-1
3.3 SOIL AND GEOLOGY 3-2
3.3.1 Regional Geology 3-2
3.3.2 Soil and Glacial Deposits 3-2
3.3.3 Geologic Setting of Atlas Scrap Yard 3-3
3.4 HYDROGEOLOGY 3-4
3.4.1 Regional Hydrogeology 3-4
3.4.2 Atlas Scrap Yard Hydrologic/Hydrogeologic Setting 3-5
3.4.3 Surface Water 3-5
3.4.3.1 Regional Surface Water 3-5
3.4.3.2 Atlas Scrap Yard Surface Water 3-6
3.5 CLIMATE 3-7

4.0 SITE ASSESSMENTS, INVESTIGATIONS, AND DATA ASSEMBLY 4-1
4.1 ATLAS SCRAP YARD PREVIOUS ASSESSMENTS AND EVALUATIONS 4-1
4.1.1 Relative Risk Site Evaluation for Newly Added Sites 4-1
4.2 ATLAS SCRAP YARD REMEDIAL INVESTIGATIONS 4-2
4.2.1 Characterization of 14 AOCs 4-2
4.2.1.1 Field Activities 4-3
4.2.1.2 Nature and Extent of Contamination 4-4
4.2.1.3 Human Health Risk Screening 4-5
4.2.1.4 Ecological Risk Screening 4-5
4.2.1.5 Geophysical Survey 4-5
4.2.1.6 Conclusions 4-6
4.2.2 PBA08 Remedial Investigation – April 2010 4-6
4.2.2.1 Surface Soil Sampling Rationale – Source Area Investigation 4-7
4.2.2.2 Surface Soil Sampling Rationale – Large ISM Samples 4-7
4.2.2.3 Surface Soil Sampling Rationale – Chromium Speciation 4-8
4.2.2.4 Subsurface Soil Sampling Rationale and Methods 4-8
4.2.2.5 Sediment and Surface Soil Sampling 4-9
4.2.2.6 Changes from the Work Plan 4-9
4.2.3 PBA08 Remedial Investigation - April 2011 4-9
4.3 FACILITY-WIDE BACKGROUND EVALUATION 4-10
4.4 DATA EVALUATION METHOD 4-11
4.4.1 Definition of Aggregates 4-11
4.4.2 Data Verification, Reduction, and Screening 4-12
4.4.2.1 Data Verification 4-12
4.4.2.2 Data Reduction 4-13
4.4.2.3 Data Screening 4-13
4.4.3 Data Presentation 4-14
4.4.4 Data Evaluation 4-15

5.0 NATURE AND EXTENT OF CONTAMINATION 5-1
5.1 SURFACE SOIL DISCRETE SAMPLE RESULTS FOR CHROMIUM SPECIATION 5-1
5.2 CONTAMINANT NATURE AND EXTENT IN SURFACE SOIL 5-1
5.2.1 Explosives and Propellants 5-2
5.2.2 Inorganic Chemicals 5-2
5.2.3 Semi-volatile Organic Compounds 5-3
5.2.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls 5-4
5.3 CONTAMINANT NATURE AND EXTENT IN SUBSURFACE SOIL 5-4
5.3.1 Explosives and Propellants 5-4
5.3.2 Inorganic Chemicals 5-5
5.3.3 Semi-volatile Organic Compounds 5-5
5.3.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls 5-6
5.4 GEOTECHNICAL SUBSURFACE SOIL SAMPLES 5-6
5.5 CONTAMINANT NATURE AND EXTENT IN SEDIMENT 5-7
5.5.1 Explosives and Propellants 5-7
5.5.2 Inorganic Chemicals 5-7
5.5.3 Semi-volatile Organic Compounds 5-7
5.5.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls 5-8
5.6 CONTAMINANT NATURE AND EXTENT IN SURFACE WATER 5-8
5.6.1 Explosives and Propellants 5-8
5.6.2 Inorganic Chemicals 5-8
5.6.3 Semi-volatile Organic Compounds 5-8
5.6.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls 5-9
5.7 SUMMARY OF CONTAMINANT NATURE AND EXTENT 5-9

6.0 CONTAMINANT FATE AND TRANSPORT 6-1
6.1 PHYSICAL AND CHEMICAL PROPERTIES OF SITE-RELATED CONTAMINANTS 6-1
6.1.1 Chemical Factors Affecting Fate and Transport 6-2
6.1.2 Biodegradation 6-3
6.1.3 Inorganic Chemicals 6-3
6.1.4 Organic Chemicals 6-4
6.1.5 Explosives – Related Chemicals 6-5
6.2 CONCEPTUAL MODEL FOR FATE AND TRANSPORT 6-6
6.2.1 Contaminant Sources 6-6
6.2.2 Hydrogeology 6-6
6.2.3 Contaminant Release Mechanisms and Migration Pathways 6-7
6.2.4 Water Budget 6-8
6.3 SOIL SCREENING ANALYSIS 6-9
6.3.1 Soil Screening Analysis 6-9
6.3.2 Limitations and Assumptions of Soil Screening Analysis 6-12
6.4 SEDIMENT SCREENING ANALYSIS 6-12
6.5 FATE AND TRANSPORT MODELING 6-13
6.5.1 Modeling Approach 6-13

6.5.2 Model Applications 6-15
6.5.2.1 SESOIL Modeling 6-15
6.5.2.2 Climate Data 6-15
6.5.2.3 Chemical Data 6-16
6.5.2.4 Soil Data 6-16
6.5.2.5 Source Terms 6-17
6.5.2.6 Application Data 6-17
6.5.3 SESOIL Modeling Results 6-18
6.5.4 AT123D Modeling in the Saturated Zone 6-18
6.5.5 AT123D Modeling Results 6-19
6.5.6 Limitations/Assumptions 6-20
6.6 SUMMARY AND CONCLUSIONS 6-22

7.0 RISK ASSESSMENT 7-1
7.1 DATA EVALUATION FOR HUMAN HEALTH AND ECOLOGICAL RISK ASSESSMENTS 7-1
7.1.1 Data Aggregates 7-1
7.1.2 Identification of SRCs 7-2
7.2 HUMAN HEALTH RISK ASSESSMENT 7-3
7.2.1 Identify Media of Concern 7-4
7.2.2 Identify COPCs 7-4
7.2.2.1 COPCs in Surface Soil 7-5
7.2.2.2 COPCs in Subsurface Soil 7-5
7.2.3 Land Use and Representative Receptors 7-5
7.2.4 Compare to Appropriate FWCUGs 7-6
7.2.4.1 Selection of Appropriate FWCUGs 7-8
7.2.4.2 Exposure Point Concentrations for Comparison to FWCUGs 7-9
7.2.4.3 Identification of COCs for Unrestricted (Residential) Land Use 7-10
7.2.4.4 Identification of COCs for Commercial/Industrial Land Use 7-16
7.2.4.5 Identification of COCs for Military Training Land Use 7-18
7.2.5 Uncertainty Assessment 7-21
7.2.5.1 Uncertainty in Estimating Potential Exposure 7-21
7.2.5.2 Uncertainty in Use of FWCUGs 7-27
7.2.5.3 Uncertainty in the Identification of COCs 7-29
7.2.6 Summary of HHRA 7-29
7.3 ECOLOGICAL RISK ASSESSMENT 7-31
7.3.1 Scope and Objective 7-31
7.3.2 Level I: Scoping Level Ecological Risk Assessment 7-32
7.3.2.1 AOC Description and Land Use 7-32
7.3.2.2 Evidence of Historical Chemical Contamination 7-33
7.3.2.3 Ecological Significance 7-34
7.3.2.4 Evaluation of Historical Chemical Contamination and Ecological Significance 7-43
7.3.3 Level II: Screening Level Ecological Risk Assessment 7-44
7.3.3.1 Generic Ecological Conceptual Exposure Model 7-44

7.3.3.2 Habitats and Species (Including Generic Receptors) 7-45
7.3.3.3 Procedure to Identify COPECs 7-45
7.3.3.4 Integrated COPECs for Soil (0-1 ft bgs) 7-46
7.3.3.5 Integrated COPECs for Sediment 7-49
7.3.3.6 Integrated COPECs for Surface Water 7-49
7.3.3.7 Step 3A: Refinement of Integrated COPECs 7-49
7.3.3.8 Consideration of Human Health Driven Remediation 7-62
7.3.3.9 Uncertainties and Mitigations 7-62
7.3.3.10 Summary and Conclusions of Screening Level Ecological Risk Assessment 7-65
7.3.4 Conclusions 7-65

8.0 REMEDIAL INVESTIGATION CONCLUSIONS 8-1
8.1 INTRODUCTION 8-1
8.2 SUMMARY OF DATA USED IN THE REMEDIAL INVESTIGATION 8-1
8.3 SUMMARY OF CONTAMINANT NATURE AND EXTENT 8-2
8.4 SUMMARY OF CONTAMINANT FATE AND TRANSPORT 8-3
8.5 SUMMARY AND CONCLUSIONS OF THE HUMAN HEALTH RISK ASSESSMENT 8-4
8.6 SUMMARY AND CONCLUSIONS OF THE ECOLOGICAL RISK ASSESSMENT 8-5
8.7 UPDATED CONCEPTUAL SITE MODEL 8-6
8.7.1 Primary and Secondary Contaminant Sources and Release Mechanisms 8-6
8.7.2 Contaminant Migration Pathways and Exit Points 8-7
8.7.2.1 Surface Water Pathways 8-7
8.7.2.2 Groundwater Pathways 8-7
8.7.2.3 Sewer System 8-8
8.7.3 Potential Receptors 8-9
8.7.4 Uncertainties 8-9
8.8 CONCLUSIONS OF THE REMEDIAL INVESTIGATION 8-9

9.0 REFERENCES 9-1

LIST OF TABLES

Table ES-1. Atlas Scrap Yard Surface Soil (0–1 ft bgs) COCs and CUGs ES-4
Table 2-1. Potential Source Area Description and Potential Impacts 2-10
Table 2-2. Federal and State-listed Species List 2-12
Table 2-3. Summary of Former Underground Storage Tanks at Atlas Scrap Yard 2-13
Table 3-1. Hydraulic Conductivities Measured During the Characterization of 14 AOCs 3-7
Table 4-1. Characterization of 14 AOCs Sampling Locations 4-17
Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples 4-25
Table 4-3. Analytes Detected in Characterization of 14 AOCs Sediment Samples 4-37
Table 4-4. Human Health Chemicals of Potential Concern per the Characterization of 14 AOCs Report 4-38
Table 4-5. Chemicals Exceeding Ecological Screening Values per the Characterization of 14 AOCs Report 4-38
Table 4-6. Chemicals Detected at Concentrations above Screening Criteria in Previous Investigations 4-38
Table 4-7. PBA08 RI Surface Soil Samples and Rationales – April 2010 4-39
Table 4-8. PBA08 RI Chromium Speciation Samples – April 2010 4-42
Table 4-9. PBA08 RI Subsurface Soil Samples, Rationale, and Analyses – April 2010 4-43
Table 4-10. Changes from the PBA08 Sample and Analysis Plan 4-47
Table 4-11. PBA08 RI Surface Soil Samples, Rationale, and Analyses – April 2011 4-48
Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples 4-51
Table 4-13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples 4-65
Table 4-14. Analytes Detected in PBA08 RI Subsurface Soil Samples 4-75
Table 4-15. Analytes Detected in PBA08 RI Sediment Samples 4-95
Table 4-16. Analytes Detected in PBA08 RI Surface Water Samples 4-97
Table 4-17. RVAAP Background Concentrations 4-98
Table 4-18. Recommended Dietary Allowances/Recommended Daily Intake Values 4-99
Table 4-19. Data Summary 4-100
Table 4-20. SRC Screening Summary for Surface Soil 4-107
Table 4-21. SRC Screening Summary for Subsurface Soil 4-110
Table 4-22. SRC Screening Summary for ISM Sediment 4-112
Table 4-23. SRC Screening Summary for Discrete Sediment 4-113
Table 4-24. SRC Screening for Surface Water 4-115
Table 5-1. Chromium Speciation Results 5-10
Table 5-2. Summary of Geotechnical Parameters 5-10
Table 5-3. Surface Water Field Measurements 5-10
Table 6-1. Initial CMCOPCs Evaluated with SESOIL Modeling 6-23
Table 6-2. Calculated Sample-specific DAFs for Atlas Scrap Yard 6-24
Table 6-3. Unit-specific Parameters Used in SESOIL and AT123D Modeling 6-25
Table 6-4. Summary of SESOIL Modeling Results 6-27
Table 6-5. Summary of AT123D Modeling Results 6-28
Table 7-1. Risk Assessment Dataset for Surface Soil (0–1 ft bgs) ISM Samples 7-67
Table 7-2. Risk Assessment Dataset for Subsurface Soil 7-69

Table 7-3. Summary of SRCs in Soil 7-70
Table 7-4. Summary of COPCs in Soil 7-71
Table 7-5. Screening Levels Corresponding to an HQ of 1.0 and Target Risk of 1E-05 in Soil 7-72
Table 7-6. Surface Soil COCs for Unrestricted (Residential) Land Use 7-73
Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead 7-75
Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese 7-80
Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene 7-85
Table 7-10. Surface Soil COCs for Commercial/Industrial Land Use 7-91
Table 7-11. Surface Soil COCs for Military Training Land Use 7-91
Table 7-12. Environmental Concentrations of PAHs Measured in Background Surface Soil Samples at RVAAP 7-92
Table 7-13. Concentrations of Benz(a)anthracene, Benzo(a)pyrene, Benzo(b)fluoranthene, and Dibenz(a,h)anthracene in Soil from Various Environmental Studies 7-92
Table 7-14. Surface Soil ISM Sample Locations Having COCs 7-94
Table 7-15. Summary of Historical COPECs per the Characterization of 14 AOCs 7-95
Table 7-16. Wetlands (OHARNG 2008) at Atlas Scrap Yard 7-95
Table 7-17. Survey of Various Ecological Resources in Proximity to the AOC 7-96
Table 7-18. Summary of Integrated COPECs for Surface Soil of Entire Atlas Scrap Yard 7-97
Table 7-19. Summary of Integrated COPECs for Surface Soil in Wetland ISM Evaluations 7-98
Table 7-20. Application and Decisions of Selected Evaluation Factors to Integrated COPECs for Surface Soil from Level II 7-98
Table 7-21. Summary of Data for Step 3A Refinement of Integrated COPECs in Surface Soil at Atlas Scrap Yard 7-99
Table 7-22. Summary of Mean Concentrations and Background Concentrations of Remaining Integrated Soil COPECs in the Refinement Factors 7-100
Table 7-23. Comparison of Alternative ESV to Mean Concentration for Remaining Integrated COPECs 7-100
Table 7-24. Summary of Integrated COPECs for Discrete* Surface Soil 7-101
Table 7-25. Comparison of Integrated COPECs for ISM and Discrete Data 7-102

LIST OF FIGURES

Figure ES–1. Locations Recommended for Remediation of Lead ES-9
Figure ES–2. Separate Areas Evaluated for PAH COC Assessment ES-10
Figure ES–3. Area 1 – Recommended for No Further Action for PAHs ES-11
Figure ES–4. Area 2 – Recommended for Evaluation in FS (Potential LUCs) ES-12
Figure ES–5. Area 3 – Presentation of PAH COC Results ES-13
Figure ES–6. Area 3 – Recommended Path Forward ES-14
Figure ES–7. Atlas Scrap Yard – Recommended Path Forward for PAH COCs ES-15
Figure 1–1. General Location and Orientation of Camp Ravenna 1-4
Figure 1–2. Location of AOCs and Munitions Response Sites at Camp Ravenna 1-5
Figure 1–3. Process for Developing Remedial Decisions at Areas of Concern (USACE 2010a) 1-7
Figure 2–1. Site Features 2-15
Figure 3–1. Topography, Groundwater Flow, and Surface Water Flow at Atlas Scrap Yard 3-9
Figure 3–2. Geologic Map of Unconsolidated Deposits on Camp Ravenna 3-10
Figure 3–3. Geologic Bedrock Map and Stratigraphic Description of Units on Camp Ravenna 3-11
Figure 3–4. Potentiometric Surface of Unconsolidated Aquifer at Camp Ravenna 3-12
Figure 3–5. Potentiometric Surface of Bedrock Aquifers at Camp Ravenna 3-13
Figure 4–1. Characterization of 14 AOCs Sampling Locations 4-117
Figure 4–2. PBA08 RI Surface Soil Sampling 4-119
Figure 4–3. PBA08 RI Subsurface Soil Sampling Decision Flowchart 4-120
Figure 4–4. PBA08 RI – April 2010 Source Area Sampling Locations 4-121
Figure 4–5. PBA08 RI – April 2010 Large ISM Sampling Locations 4-122
Figure 4–6. Characterization of 14 AOCs and PBA08 RI – April 2010 Source Area Sampling Locations 4-123
Figure 4–7. PBA08 RI – April 2011 Soil Sampling Locations (Active Storage Area) 4-124
Figure 4–8. Process to Identify RVAAP COPCs in the Human Health Risk Assessment (USACE 2010a) 4-125
Figure 5–1. Concentrations of Inorganic SRCs in Surface Soil Samples at the Northern Area 5-11
Figure 5–2. Concentrations of Inorganic SRCs in Surface Soil Samples at the Central Area 5-12
Figure 5–3. Concentrations of Inorganic SRCs in Surface Soil Samples at the Southern Area 5-13
Figure 5–4. Concentrations of Organic SRCs in Surface Soil Samples at the Northern Area 5-14
Figure 5–5. Concentrations of Organic SRCs in Surface Soil Samples at the Central Area 5-15
Figure 5–6. Concentrations of Organic SRCs in Surface Soil Samples at the Southern Area 5-16
Figure 5–7. Concentrations of Inorganic SRCs in Grid ISM Surface Soil Samples 5-17
Figure 5–8. Concentrations of Organic SRCs in Grid ISM Surface Soil Samples 5-18
Figure 5–9. Concentrations of Inorganic SRCs in Active Storage Area ISM Surface Soil Samples 5-19
Figure 5–10. Concentrations of Organic SRCs in Active Storage Area ISM Surface Soil Samples 5-20
Figure 5–11. Concentrations of SRCs in Subsurface Soil Samples at the Northern Area 5-21
Figure 5–12. Concentrations of SRCs in Subsurface Soil Samples at the Central Area 5-22
Figure 5–13. Concentrations of SRCs in Subsurface Soil Samples at the Southern Area 5-23
Figure 5–14. Concentrations of SRCs in Sediment and Surface Water Samples 5-24

Figure 6–1. Contaminant Migration Conceptual Model 6-29
Figure 6–2. Initial CMCOPCs Identified in Soil Screening Analysis for SESOIL Evaluation.....6-30
Figure 6–3. AOC Fate and Transport Modeling Approach – Sediment.....6-32
Figure 6–4. Initial CMCOPCs Identified in Soil Screening Analysis for SESOIL Evaluation.....6-33
Figure 6–5. CMCOPCs Identified in SESOIL and Sediment Screening Analysis for AT123D Evaluation.....6-34
Figure 7–1. Arsenic and Lead Surface Soil Concentrations Comparison to FWCUGs 7-103
Figure 7–2. Manganese Surface Soil Concentrations Comparison to FWCUGs 7-104
Figure 7–3. Benzopyrene Surface Soil Concentrations Comparision to FWCUGs 7-105
Figure 7–4. Natural Resources (OHARNG 2014) at Atlas Scrap Yard 7-107
Figure 8–1. Atlas Scrap Yard Conceptual Site Model 8-11
Figure 8–2. Contaminated Areas Requiring Remediation at Atlas Scrap Yard 8-13

LIST OF PHOTOGRAPHS

Photograph 7-1. Habitat of Herbaceous and Shrubland Fields in Foreground and Forest in Background at Atlas Scrap Yard (looking southeast from access road, May 17, 2010) 7-41
Photograph 7-2. Oak Forest Vegetation (looking south from Newton Falls Road, May 17, 2010) 7-42

LIST OF APPENDICES

Appendix A. Field Sampling Logs
Appendix B. Project Quality Assurance Summary
Appendix C. Data Quality Control Summary Report
Appendix D. Laboratory Analytical Results and Chains-of-Custody
Appendix E. Fate and Transport Modeling Results
Appendix F. Investigation-derived Waste Management Reports
Appendix G. Human Health Risk Assessment Tables
Appendix H. Ecological Risk Assessment Information and Data
Appendix I. Ordnance and Explosives Avoidance Survey Report
Appendix J. PBA08 Remedial Investigation Summary
Appendix K. Ohio EPA Comments

THIS PAGE INTENTIONALLY LEFT BLANK

ACRONYMS AND ABBREVIATIONS

amsl	Above Mean Sea Level
AOC	Area of Concern
ASA	Active Storage Area
AST	Aboveground Storage Tank
AT123D	Analytical Transient 1-, 2-, 3-Dimensional
bgs	Below Ground Surface
BHC	Hexachlorobenzene
BSV	Background Screening Value
BTEX	Benzene, Toluene, Ethylbenzene, and Xylene
BUSTR	Below Underground Storage Tank Regulation
Camp Ravenna	Camp Ravenna Joint Military Training Center
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CMCOC	Contaminant Migration Chemical of Concern
CMCOPC	Contaminant Migration Chemical of Potential Concern
COC	Chemical of Concern
COPC	Chemical of Potential Concern
COPEC	Chemical of Potential Ecological Concern
CRP	Compliance Restoration Program
CSEM	Conceptual Site Exposure Model
CSM	Conceptual Site Model
DAF	Dilution Attenuation Factor
DERR	Division of Environmental Response and Revitalization
DFFO	Director's Final Findings and Orders
DNT	Dinitrotoluene
DRO	Diesel Range Organics
DQO	Data Quality Objective
EcoSSL	Ecological Soil Screening Level
EPC	Exposure Point Concentration
ERA	Ecological Risk Assessment
ERS	Ecological Risk Screening
ESV	Ecological Screening Value
EU	Exposure Unit
FA	Functional Area
FCR	Field Change Request
f_{oc}	Soil Organic Carbon-Content
FS	Feasibility Study
ft	feet
FWCUG	Facility-Wide Cleanup Goal
FWERWP	Facility-Wide Ecological Risk Work Plan
FWGWMP	Facility-Wide Groundwater Monitoring Program
FWHHRAM	Facility-Wide Human Health Risk Assessor Manual
FWQAPP	Facility-Wide Quality Assurance Project Plan

ACRONYMS AND ABBREVIATIONS (CONTINUED)

FWSAP	Facility-Wide Sampling and Analysis Plan
gal	gallon
gpm	gallons per minute
GPS	Global Positioning System
GRO	Gasoline Range Organics
GSSL	Generic Soil Screening Level
HELP	Hydrologic Evaluation of Landfill Performance
HHRA	Human Health Risk Assessment
HHRS	Human Health Risk Screening
HI	Hazard Index
HLC	Henry's Law Constant
HMX	Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine
HQ	Hazard Quotient
IA	Inactive Area
ILCR	Incremental Lifetime Cancer Risk
INRMP	Integrated Natural Resources Management Plan
IRIS	Integrated Risk Information System
IRP	Installation Restoration Program
ISM	Incremental Sampling Method
$K_{d}s$	Distribution Coefficients
K_{oc}	Water/Organic Carbon Partition Coefficient
K_{ow}	Octanol-Water Partition Coefficient
LCG	Louisville Chemistry Guidance
MARC	Multiple Award Remediation Contract
MCL	Maximum Contaminant Level
MD	Munitions Debris
MDC	Maximum Detected Concentration
MDL	Method Detection Limit
MEC	Munitions and Explosives of Concern
MI	Multi-Incremental
MMRP	Military Munitions Response Program
mph	Miles per hour
MRS	Munitions Response Site
MTBE	Methyl Tertiary Butyl Ether
NCP	National Oil and Hazardous Substances Pollution Contingency Plan
NFA	No Further Action
OHARNG	Ohio Army National Guard
Ohio EPA	Ohio Environmental Protection Agency
ORAM	Ohio Rapid Assessment Method
PAH	Polycyclic Aromatic Hydrocarbon
PBA	Performance-Based Acquisition
PBA08 RI	Performance-Based Acquisition 2008 Remedial Investigation

ACRONYMS AND ABBREVIATIONS (CONTINUED)

PBA08 SAP	Performance Based Acquisition 2008 Supplemental Investigation Sampling and Analysis Plan Addendum No. 1
PBT	Persistent, Bioaccumulative, and Toxic
PCB	Polychlorinated Biphenyl
PP	Proposed Plan
PRG	Preliminary Remediation Goal
QA	Quality Assurance
QC	Quality Control
R	Retardation Factor
RCC	Reinforced Concrete Culvert
RDA	Recommended Dietary Allowance
RDI	Recommended Daily Intake
RDX	Cyclotrimethylenetrinitramine
REIMS	Ravenna Environmental Information Management System
RfD	Reference Dose
RI	Remedial Investigation
ROD	Record of Decision
RRSE	Relative Risk Site Evaluation
RSL	Regional Screening Level
RVAAP	Ravenna Army Ammunition Plant
SAIC	Science Applications International Corporation
SAP	Sampling and Analysis Plan
SESOIL	Seasonal Soil Compartment Model
SI	Site Investigation
SOR	Sum-of-Ratios
SRC	Site-Related Contaminant
SRV	Sediment Reference Value
SSL	Soil Screening Level
SSSL	Site-Specific Soil Screening Level
SVOC	Semi-Volatile Organic Compound
SWMU	Solid Waste Management Unit
TAL	Target Analyte List
TestAmerica	TestAmerica Laboratories, Inc.
TNB	Trinitrobenzene
TNT	2,4,6-Trinitrotoluene
TOC	Total Organic Carbon
TPH	Total Petroleum Hydrocarbons
TR	Target Risk
UCL	Upper Confidence Limit
URF	Unit Risk Factor
USACE	United States Army Corps of Engineers
USACHPPM	United States Army Center for Health Promotion and Preventative Medicine

ACRONYMS AND ABBREVIATIONS (CONTINUED)

USEPA	United States Environmental Protection Agency
U.S. Army	United States Department of the Army
USP&FO	United States Property and Fiscal Officer
UST	Underground Storage Tank
UTL	Upper Tolerance Limit
VAP	Voluntary Action Program
VOC	Volatile Organic Compound
WOE	Weight-of-Evidence

EXECUTIVE SUMMARY AND UPDATE

ES.1 INTRODUCTION AND SCOPE

This revised final version of the *Remedial Investigation Report for Soil, Sediment, and Surface Water at RVAAP-50 Atlas Scrap Yard* has been prepared by Leidos under U.S. Army Corps of Engineers Louisville District Contract Number W912QR-15-C-0046. The original Final Atlas Scrap Yard Remedial Investigation (RI) Report was issued on June 26, 2015. Sections 1–9 of this compiled report are as they were presented in the June 26, 2015 version. The details presented in this Executive Summary and Update provide the path forward agreed upon by the U.S. Department of the Army (Army) and Ohio Environmental Protection Agency (Ohio EPA) for Atlas Scrap Yard. Specifically, this Executive Summary has been updated as part of this Revised Final RI Report to address Ohio EPA comments dated September 7, 2016, as outlined in the the Army's repsonses to comments dated October 14, 2016. Section ES.2 summarizes the comment response activities with respect to the Final RI Report.

This RI Report addresses soil, sediment, and surface water at Atlas Scrap Yard within the former Ravenna Army Ammunition Plant (RVAAP) [now known as Camp Ravenna Joint Military Training Center (Camp Ravenna)] in Portage and Trumbull counties, Ohio.

ES.2 COMMENT RESOLUTION

As indicated above, the Final RI Report was issued by the Army on June 26, 2015. The activities and comment resolution that took place after the Final RI Report was submitted are outlined below:

- November 13, 2015 – Ohio EPA provided a letter containing comments on the Final RI Report.
- March 17, 2016 – The Army issued responses to Ohio EPA's letter dated November 13, 2015 with proposed changes.
- September 7, 2016 – Ohio EPA provided a response to the Army's March 17, 2015 letter and proposal.
- October 17, 2016 – The Army issued a response to Ohio EPA's letter dated September 7, 2016.
- November 9, 2016 – Ohio EPA provided an approval of the Army's proposed responses.

Appendix K includes the correspondences between the Army and Ohio EPA and the Ohio EPA comment letter that predated the submission of the June 26, 2015 Final RI Report.

On March 17, 2016, the Army provided final responses to Ohio EPA comments on the Final RI Report which contained a table presenting the final chemicals of concern (COCs) and cleanup goals (CUGs) and figures depicting areas recommended for no further action or further evaluation in a feasibility study (FS).

Changes based on Ohio EPA's September 7, 2016 response letter are summarized below. These changes are also documented in the Army's October 17, 2016 response letter.

- There are no changes to COCs or CUGs for Atlas Scrap Yard.
- The entirety of sample location ASYss-069M will be included as part of the area requiring evaluation in the FS for polycyclic aromatic hydrocarbon (PAH) COCs.

ES.3 REMEDIAL INVESTIGATION

Based on the investigation results, Atlas Scrap Yard has been adequately characterized to complete the RI. Additional samples may be collected to support the remedial design/remedial action (RD/RA) anticipated to be conducted at Atlas Scrap Yard, which may include:

- A surface soil sample for polychlorinated biphenyls (PCBs) by the former Building T-4704 Roads and Grounds Maintenance Building. Although no releases were documented at this location, additional surface soil sampling may be considered.
- Soil samples collected during the RD/RA phase to further delineate contamination prior to active remediation and/or confirm contamination was addressed after active remediation.

The following subsections summarize the fate and transport analysis, human health risk assessment (HHRA), and ecological risk assessment (ERA). Comment resolution with Ohio EPA did not change the recommendation of no further action for impacts to groundwater assessed in the fate and transport section or the protection of ecological resources assessed in the ERA. However, revisions per the final comment resolution with Ohio EPA are reflected in the HHRA summary.

ES.3.1 Fate and Transport Assessment

All site-related contaminants (SRCs) identified in surface soil, subsurface soil, and sediment at Atlas Scrap Yard were evaluated through the stepwise contaminant fate and transport evaluation. The evaluation included analysis of two contaminant migration pathways: leaching and migration from soil to groundwater and partitioning contaminants from sediment to surface water within the drainage ditch along Paris-Windham Road with transferal to groundwater through surface water/groundwater interaction.

Maximum concentrations of SRCs identified in surface and subsurface soil were evaluated using a series of generic screening steps to identify initial contaminant migration chemicals of potential concern (CMCOPCs). Initial CMCOPCs for soil were further evaluated using the seasonal soil compartment (SESOIL) model to predict leaching concentrations and identify final CMCOPCs based on RVAAP background screening values and the lowest risk-based screening criteria among U.S. Environmental Protection Agency (USEPA) maximum contaminant levels, USEPA tap water regional screening levels (RSLs), or RVAAP groundwater facility-wide cleanup goals (FWCUGs) for the Resident Receptor Adult. Final CMCOPCs were evaluated using the analytical transient 1-, 2-, 3-dimensional (AT123D) model to predict groundwater mixing concentrations beneath source areas and concentrations at the nearest downgradient groundwater receptor locations to the area of concern

(AOC) (e.g., streams). Maximum SRC concentrations in sediment were evaluated using an analytical solution to identify final CMCOPCs for evaluation using AT123D. The AT123D modeling results were evaluated with respect to AOC groundwater monitoring data, as well as model limitations and assumptions, to identify chemicals to be retained as CMCOCs that may warrant further evaluation in an FS.

Conclusions of the soil and sediment screening, leachate modeling, and groundwater modeling are as follows:

- The AT123D model predicted maximum future groundwater concentrations for the final soil CMCOPCs 2-nitrotoluene; 3-nitrotoluene; 2,6-dinitrotoluene (DNT); 2-amino-4,6-DNT; 4-amino-2,6-DNT; 2-methylnaphthalene; and naphthalene that exceed groundwater screening criteria beneath soil source areas, but do not exceed groundwater screening criteria at the downgradient receptor locations [i.e., unnamed tributary to Sand Creek (flowing northwest) and unnamed tributary to the Mahoning River (flowing southwest)]. Predicted groundwater concentrations of the final sediment CMCOPCs barium; chromium; copper; lead; mercury; selenium; 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene also do not exceed groundwater screening criteria at the downgradient receptor location [unnamed tributary to Cobbs Ponds (flowing northeast)].
- Evaluation of modeling results, with respect to current AOC groundwater data and model limitations, indicate that identified CMCOPCs are not currently impacting groundwater beneath the source areas and that modeling assumptions are conservative. Evaluation of predicted breakthrough curves show peak concentrations for sediment CMCOPCs and for four soil CMCOPCs (nitrotoluene; 3-nitrotoluene; 2-amino-4,6-DNT; and 4-amino-2,6-DNT) would have occurred in the past. Potential future impacts predicted by the model for remaining soil CMCOPCs would likely be mitigated by factors such as chemical and biological degradation, lateral dispersivity, and AOC-specific variations in soil geochemistry.

All SRCs were eliminated as posing future impacts to groundwater, and no further action is recommended for surface soil, subsurface soil, and sediment to protect groundwater.

ES.3.2 Human Health Risk Assessment

There were no subsurface soil, sediment, or surface water COCs identified as requiring remediation to be protective of the Resident Receptor, Industrial Receptor, or National Guard Trainee. The surface soil (0–1 ft bgs) COCs requiring remediation will be the same as presented in the Final RI Report: lead, benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, and dibenz(a,h)anthracene. The COCs requiring remediation and remedial CUGs are presented in Table ES-1.

Table ES-1. Atlas Scrap Yard Surface Soil (0–1 ft bgs) COCs and CUGs

COC	Receptor CUGs (mg/kg)		
	Resident Receptor	Industrial Receptor	National Guard Trainee
Lead	400	800	800
Benzo(a)anthracene	2.21	29	47.7
Benzo(a)pyrene	0.221	2.9	4.77
Benzo(b)fluoranthene	2.21	29	47.7
Benzo(k)fluoranthene	22.1	290	477
Dibenz(a,h)anthracene	0.221	2.9	4.77

COC = Chemical of concern.
CUG = Cleanup goal.
mg/kg = Milligrams per kilogram.

ES.3.2.1 Lead at the Former Incinerator

As presented in Figure ES-1, one general area located around surface soil samples ASYss-019M and ASYsb-064 near the old incinerator will require FS evaluation of lead in surface soil (0–1 ft bgs) to be protective for Unrestricted (Residential) Land Use, National Guard Training Land Use, and Commercial/Industrial Land Use. The surface soil concentrations from these two samples exceeded the Resident Receptor CUG, National Guard Trainee CUG, and Industrial Receptor RSL. No other locations at Atlas Scrap Yard require remediation for lead.

Remediating this area to concentrations below the Resident Receptor CUG of 400 mg/kg would result in the entirety of this area being allowed for Unrestricted (Residential) Land Use, as no other COCs require remediation.

ES.3.2.2 Site-wide PAH Recommendation

To further evaluate PAHs at Atlas Scrap Yard during the Ohio EPA comment resolution process, the site was divided into three distinct areas. These areas are presented on Figure ES-2 and are summarized below.

Area 1

Area 1 is the southwestern portion of Atlas Scrap Yard and is 19.4 acres. No known potential sources of PAHs (e.g., Service Station #1 or Service Station #2) are in Area 1. The sample locations associated with Area 1 are presented in Figure ES-3.

The sampling conducted in this area is summarized as follows:

- Large incremental sampling methodology (ISM) sample locations ASYss-087M, -091M, -092M, -097M, and -103M all had PAH COC concentrations below Resident Receptor FWCUGs.
- Large ISM sample location ASYss-091M had PAH COC concentrations below Resident Receptor CUGs. However, two surface soil (0–1 ft bgs) samples within ASYss-091M had

exceedances of the Resident Receptor FWCUGs. These samples are ISM sample location ASYss-069M and soil boring (discrete sample) ASYsb-059.

- All other source area samples in Area 1 that had PAHs analyzed were below Resident Receptor FWCUGs.

In accordance with the Army's letter dated October 17, 2016, Area 1 excludes sample locations ASYss-069M and ASYsb-059 that were collected at or immediately adjacent to a road and by Building T-19, which was previously used as a Fire Station and for equipment storage. In accordance with the Ohio EPA's letter dated November 9, 2016, the area including sample locations ASYss-069M and ASYsb-059 will be addressed as part of Area 2 discussed below and included for further evaluation in an FS. The remainder of Area 1 in Figure ES-3 is recommended for no further action with respect to PAH COCs.

Area 2

The locations presented in Figure ES-4 require further evaluation in an FS. These large ISM sample locations have PAH concentrations above Resident Receptor CUGs; however, each of these locations had PAH concentrations below the Industrial Receptor RSLs. All source area sample locations had PAH concentrations below the Industrial Receptor RSLs, with the exception of benzo(a)pyrene at ASYss-071M. Samples analyzed for PAH COCs by Service Station #2 at T-15 (ASYss-096M, ASYsb-060) had concentrations below Resident Receptor CUGs.

Regarding ASYss-071M, only one of the five PAH COCs [benzo(a)pyrene] exceeded the Industrial Receptor RSL. This sample was partially adjacent to an access road in Atlas Scrap Yard and was originally collected to delineate arsenic at Characterization of 14 AOCs (MKM 2006) sample locations ASYss-015M through -018M. This includes former Building T-13 Workmens Sheds, T-14 Garage, and T-16 Blacksmith Shop.

As noted above, in accordance with the Army's letter dated October 17, 2016 and at the request of Ohio EPA, Area 2 will include sample locations ASYss-069M and ASYsb-059, as these had sample results that exceeded the Resident Receptor FWCUGs for benzo(a)pyrene, benzo(b)fluoranthene, or dibenz(a,h)anthracene.

The FS will assess alternatives to address PAH COCs in Area 2, including consideration of land use controls, which would be protective for Commercial/Industrial Land Use and Military Training Land Use.

Area 3

Figure ES-5 presents the PAH sample results of the north central portion of Atlas Scrap Yard identified as Area 3. Large ISM sample locations ASYss-088M, -089M, and -093M had some PAH COC concentrations above the Resident Receptor CUG, National Guard Trainee CUG, and Industrial Receptor RSLs. All of the samples at large ISM sample location ASYss-094M had PAH COC concentrations below Resident Receptor CUGs. Given the complexity and sources within this area, a

sampling effort to further delineation PAH contamination was conducted in April 2011. Figure ES-6 depicts the area recommended for no further action (Area 3a) and area recommended for evaluation in an FS (Area 3b).

The areas recommended for no further action (Area 3a) are summarized below:

- Sample location ASYss-125M is an area immediately east of the ditch line sampled as ASYss-126M. Sample location had all PAH COC concentrations below the Resident Receptor CUG.
- Sample location ASYss-072M and soil boring ASYsb-052 are located at the former water tower in the southeast corner of large ISM sample ASYss-124. These two sample locations had all PAH COC concentrations below Resident Receptor COCs.
- Samples analyzed for PAH COCs that included Service Station #1 at former building T-22 and in its vicinity (ASYss-094M and ASYsb-049) had concentrations below Resident Receptor CUGs, with the exception of benzo(a)pyrene that had a concentration of 0.24 mg/kg compared to the Resident Receptor CUG of 0.221 mg/kg. Samples collected at depth near Service Station #1 as part of the separate Facility-wide Underground Storage Tank compliance restoration site all had PAH COC concentrations below the Resident Receptor CUG (ECC 2015).

The areas recommended for evaluation in an FS (Area 3b) are summarized below:

- The nature and extent of contamination under the former location of railroad ties was not sampled or characterized do to inaccessibility. Conservatively, the Army is including this area as requiring evaluation in an FS as part of Area 3b.
- The entirety of large ISM sample ASYss-088M. This large ISM sample includes the area of the railroad ties and the former parking lot area represented by samples ASYss-116M to ASYss-119M.
- The entirety of large ISM sample ASYss-089M, with the exception of the former water tower area to the southeast where sample location ASYss-072M and soil boring ASYsb-052 had all PAH COC concentrations below Resident Receptor COCs.
- The western portion of large ISM sample ASYss-093M. This includes the ditch line represented by samples ASYss-123M and ASYss-126M, a portion of the access road, and an area that was used for stockpiling various salvaged inert materials, including railroad ties and concrete and brick.
- The northwestern portion of large ISM sample ASYss-094M. This includes an area previously used for stockpiling various salvaged inert materials, including railroad ties and concrete and brick. Sample results indicated the area had exceedances of the Industrial Receptor RSLs and/or National Guard Trainee FWCUGs. The remainder of this large ISM sample is recommended for no further action.

ES.3.3 Ecological Risk Assessment

Chemical contamination identified in soil at Atlas Scrap Yard using historical and PBA08 RI data, along with wetlands, which are important and significant ecological resources near contamination in the AOC, invoked a Level II assessment.

The Level II assessment evaluated soil data and identified chemicals of potential ecological concern (COPECs). There are 28 integrated COPECs for soil at Atlas Scrap Yard. Aluminum; arsenic; cadmium; chromium; cobalt; copper; lead; manganese; mercury; selenium; silver; zinc; 2,6-DNT; benz(a)anthracene; benzo(a)pyrene; bis(2-ethylhexyl)phthalate; chrysene; and naphthalene are the 18 integrated COPECs that exceeded their background concentrations and ecological screening values (ESVs). Nine chemicals (2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; 4-amino-2,6-DNT; octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine (HMX); nitrocellulose; tetryl; carbazole; and dibenzofuran) are integrated COPECs because they did not have an ESV. Mercury and PCB-1260 are persistent, bioaccumulative, and toxic compounds.

The integrated soil COPECs were further evaluated with technical and refinement factors in Step 3A of the ERA. The factors in Step 3A showed there are no integrated COPECs that are of ecological concern requiring remediation or further evaluation. In addition, based on their Ohio Rapid Assessment Method category, size, and location, four wetlands (Wetlands 1, 6, 8, and 9) were evaluated using individual ISM samples representative of the wetland or the area between the wetland and potential sources areas. Based on the limited exceedances in these individual ISM samples, significant releases from the source areas at Atlas Scrap Yard to the wetlands have not occurred. Consequently, the ERA for Atlas Scrap Yard can conclude with Level II that no further action is necessary from the ecological perspective.

ES.4 CONCLUSIONS OF THE REMEDIAL INVESTIGATION

Based on the investigation results, Atlas Scrap Yard has been adequately characterized and the recommended path forward is to proceed to an FS. The FS will evaluate remedial alternatives to address risks identified in the HHRA pertaining to PAHs in Areas 2 and 3b, as well as lead at the former incinerator.

In addition, to address any potential data gaps associated with this RI, the FS will recommend surface soil (0–1 ft bgs) sampling at the location of former Building T-4704 Roads and Grounds Maintenance Building for PCBs. Although there have not been documented releases of PCBs at this location and the previous use of this building is not well documented, additional sampling to assess if the previous use of the building contributed PCB contamination to soil may be warranted. In developing alternatives, if active remediation is recommended as the remedy in the FS, the Army will implement pre-remediation delineation sampling during the RD phase to refine the extent of contamination above CUGs requiring active remediation. In addition, the Army will implement post-remediation horizontal and vertical confirmation sampling to refine the extent of contamination above CUGs requiring active remediation and to confirm that applicable standards have been met. The sampling schemes will be included in the RD package.

THIS PAGE INTENTIONALLY LEFT BLANK

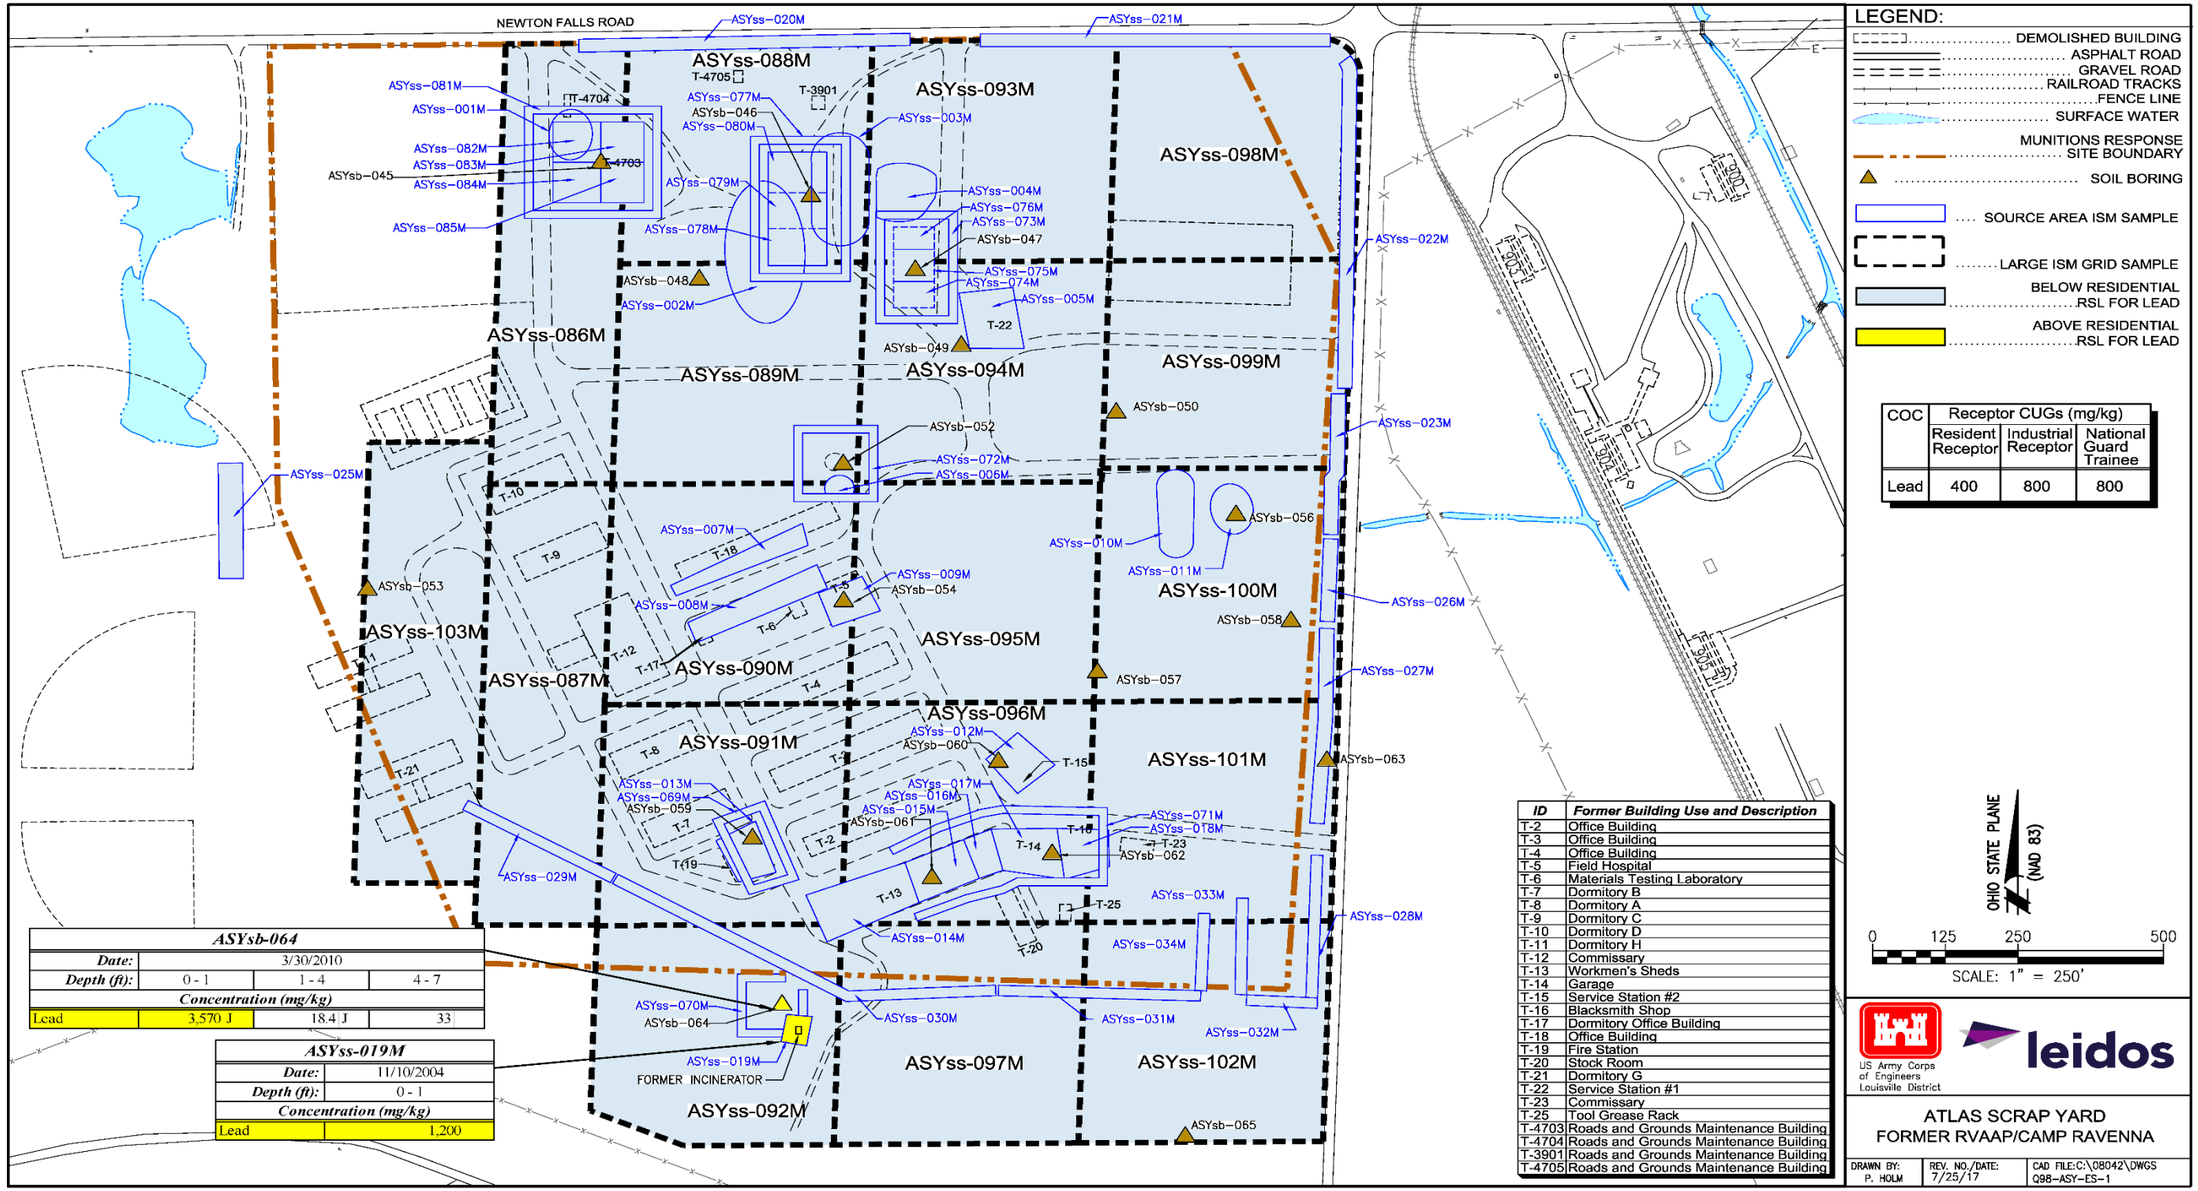


Figure ES–1. Locations Recommended for Remediation of Lead

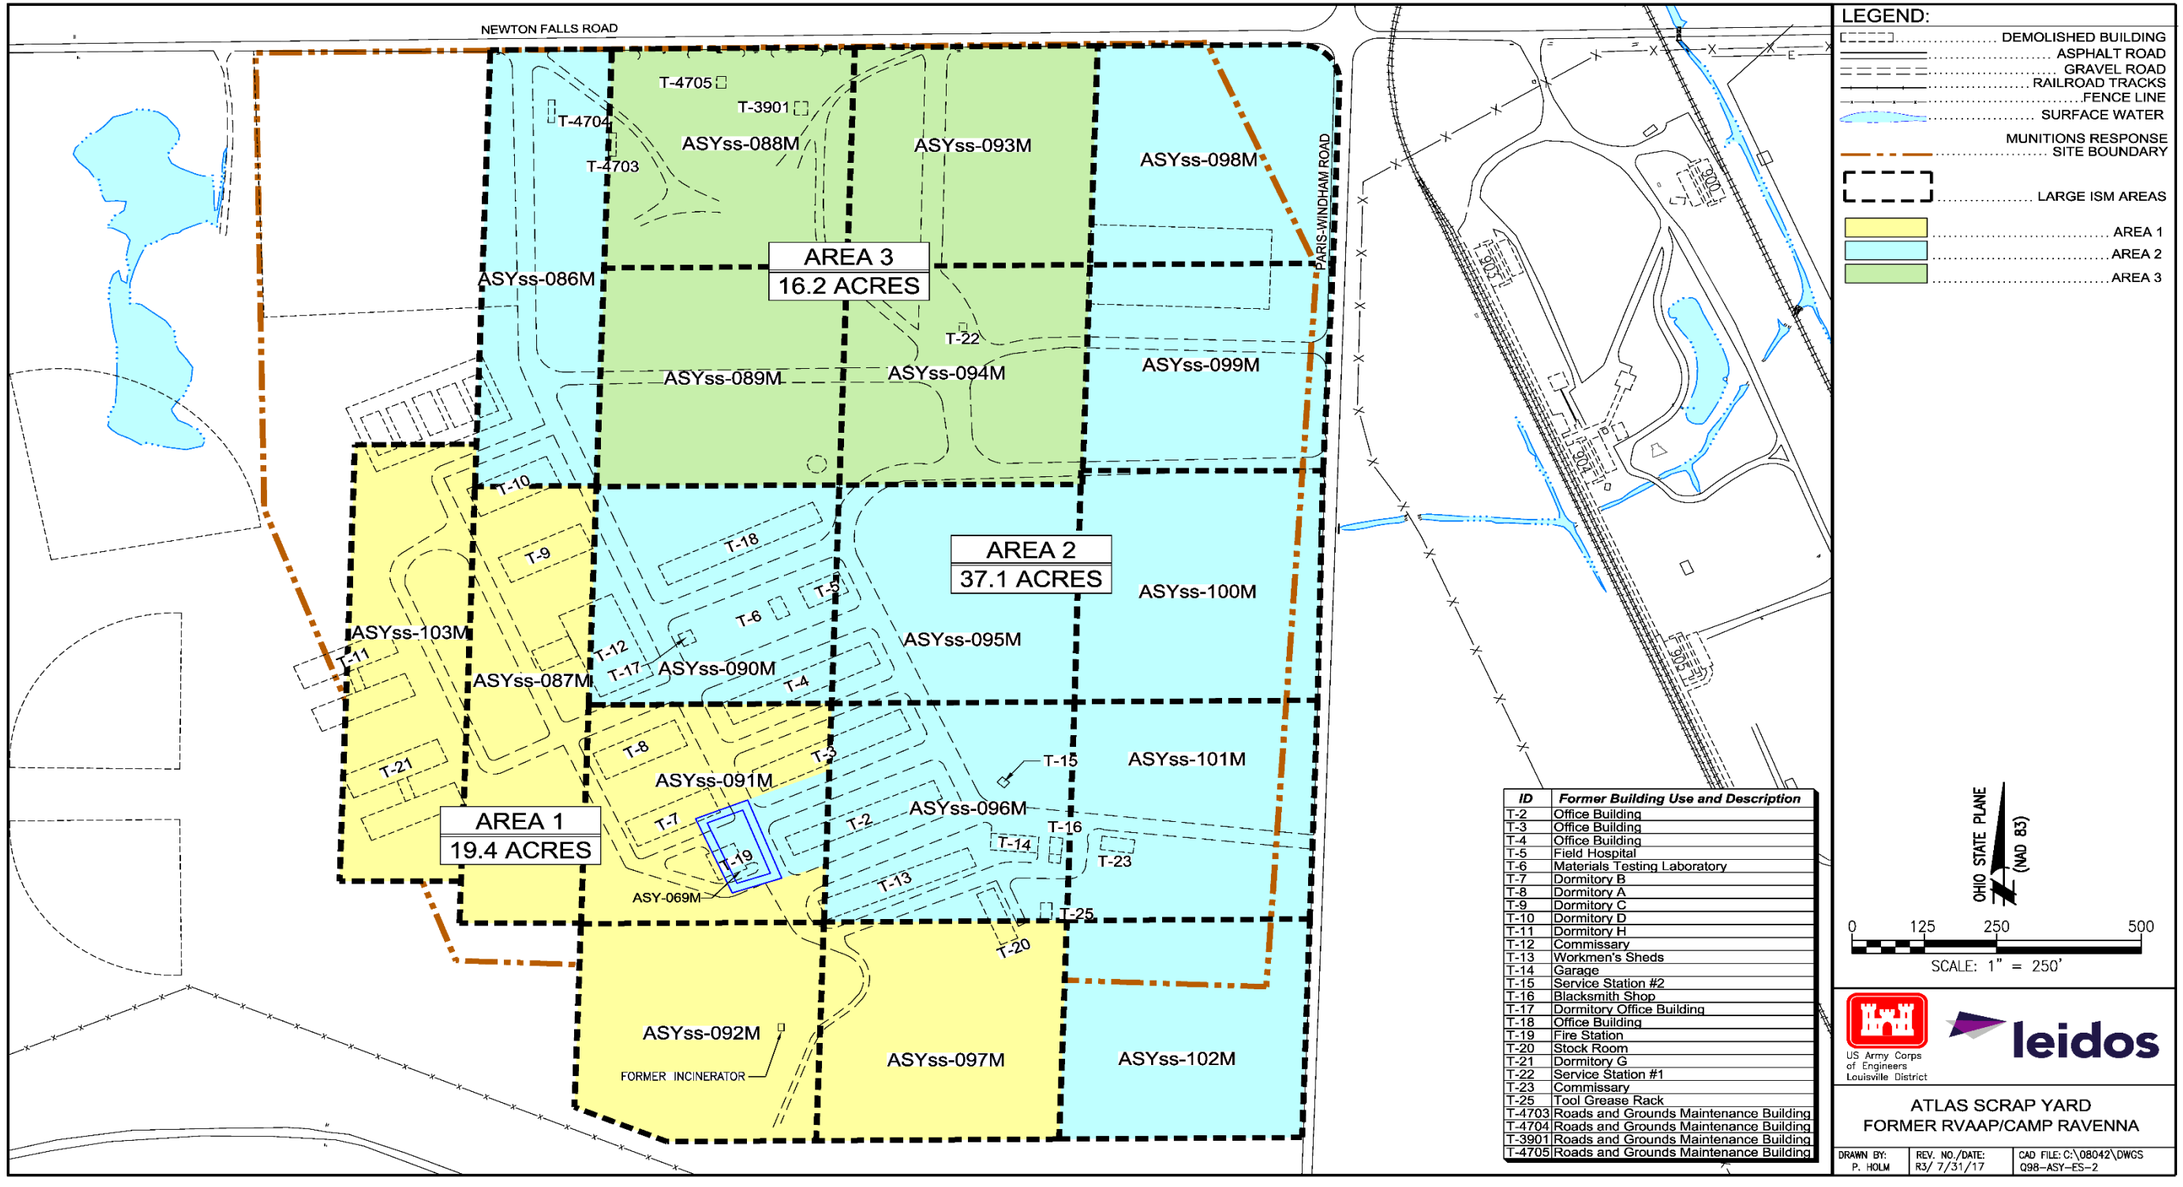


Figure ES–2. Separate Areas Evaluated for PAH COC Assessment




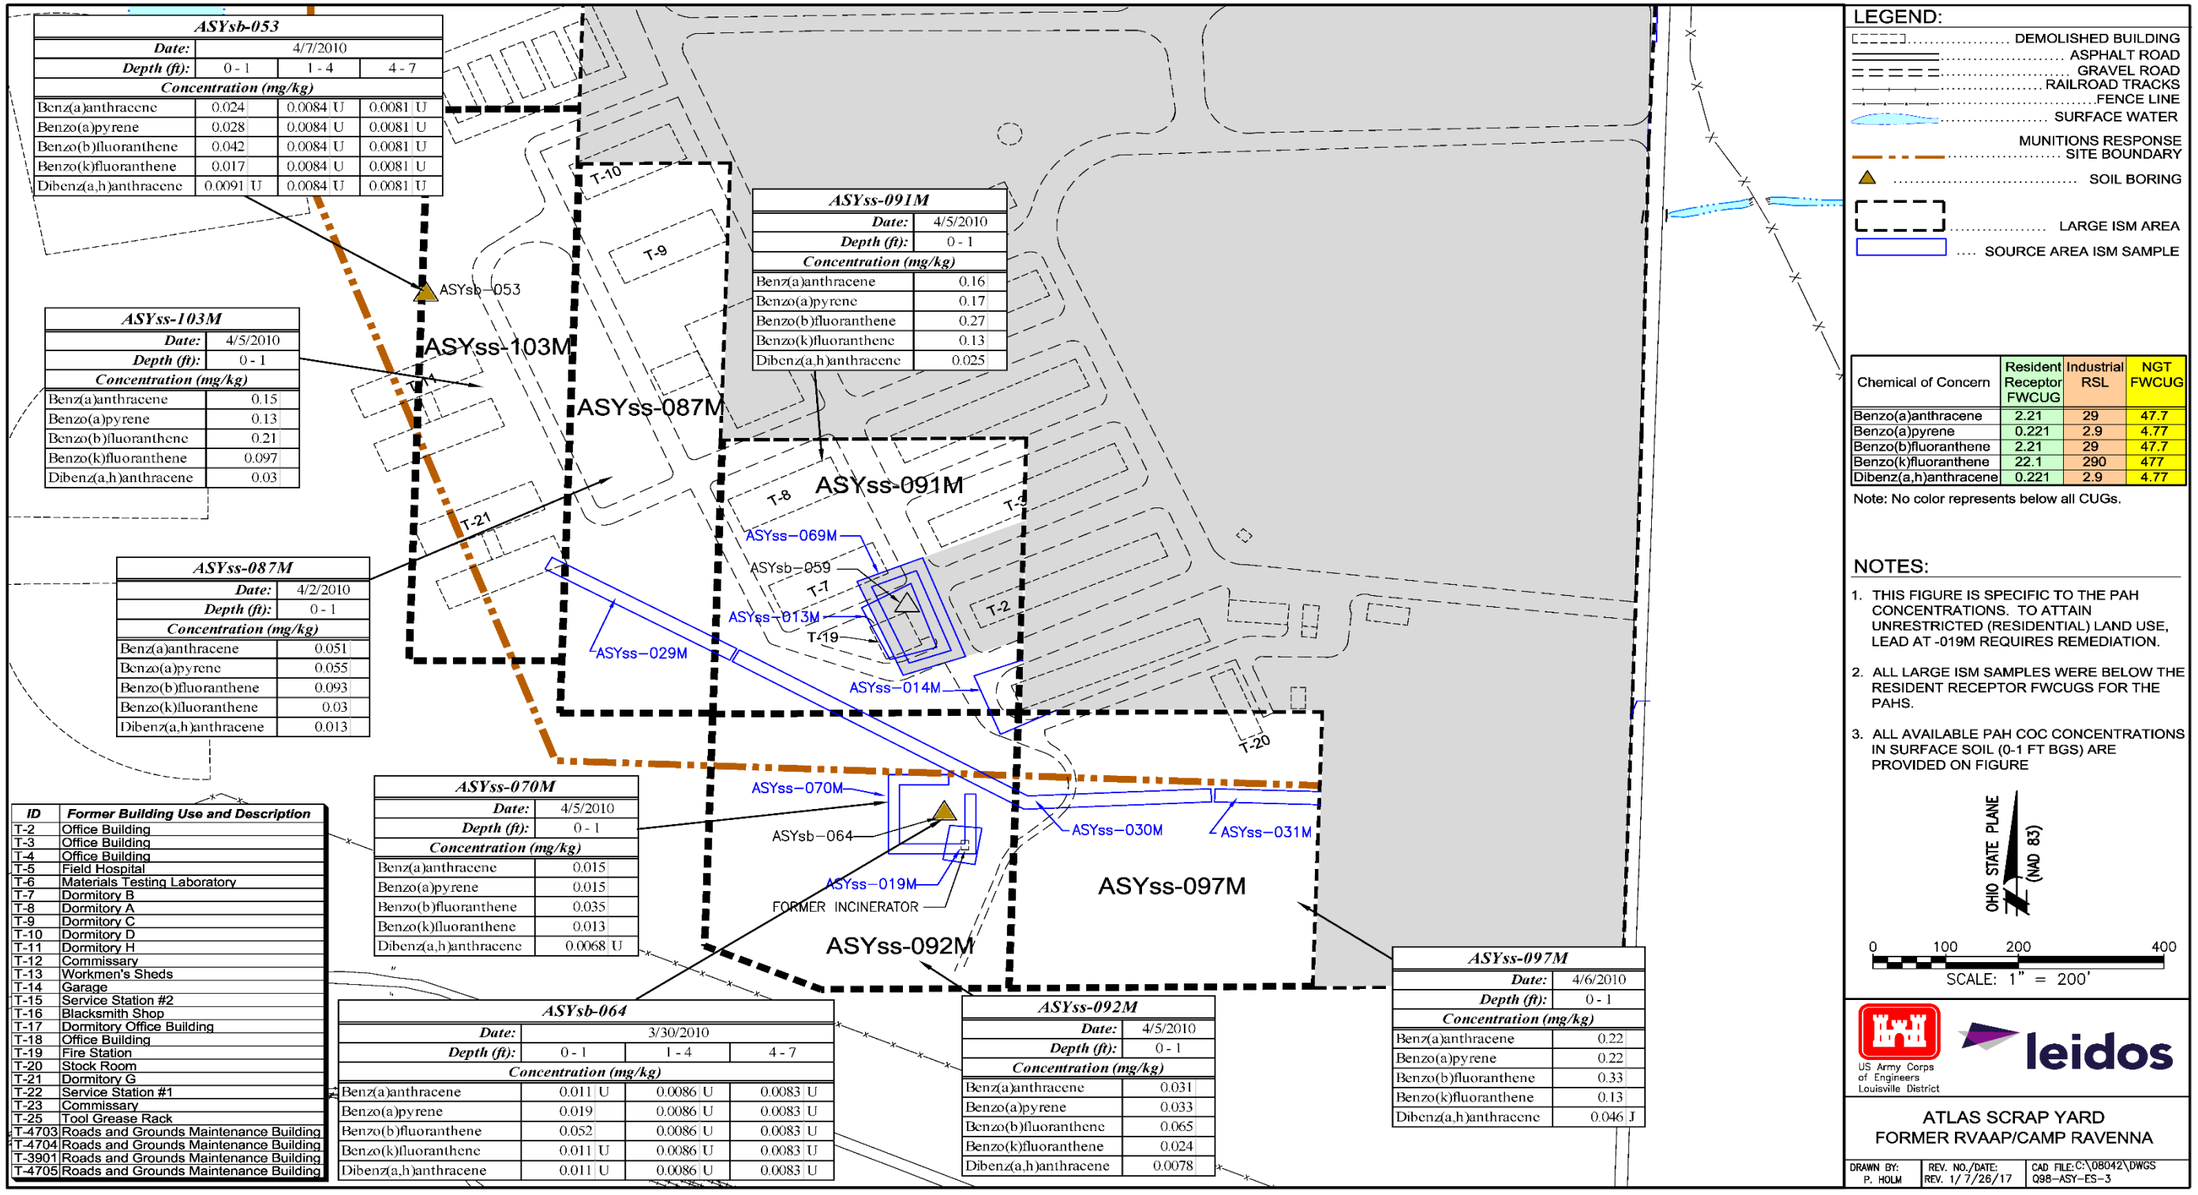


Figure ES–3. Area 1 – Recommended for No Further Action for PAHs


NEWTON FALLS ROAD
ASYss-020M
ASYss-021M
ASYss-081M
ASYss-001M
ASYss-082M
ASYss-083M
ASYss-084M
ASYss-085M
ASYsb-045
ASYss-086M
ASYss-098M
ASYss-022M
ASYss-099M
ASYss-023M
ASYsb-050
ASYss-007M
ASYss-009M
ASYsb-054
ASYss-008M
ASYss-095M
ASYss-090M
ASYss-096M
ASYss-091M
ASYss-012M
ASYsb-060
ASYss-013M
ASYss-016M
ASYss-017M
ASYss-015M
ASYsb-059
ASYsb-061
ASYss-101M
ASYss-071M
ASYss-018M
ASYsb-062
ASYsb-063
ASYss-033M
ASYss-034M
ASYss-031M
ASYss-032M
ASYss-028M
ASYss-102M
ASYsb-065
FORMER INCINERATOR
ASYss-069M
ASYss-071M
ASYss-015M
ASYss-011M
ASYss-100M
ASYsb-055
ASYss-010M
ASYsb-058
ASYss-026M
ASYsb-057
ASYss-027M
ASYsb-056
ASYss-099M
ASYss-100M
ASYss-101M
ASYss-102M
ARIS WITHAM ROAD
WFPZ-1
WFPZ-2
WFPZ-3
WFPZ-4
WFPZ-5
WFPZ-6
WFPZ-7
WFPZ-8
WFPZ-9
WFPZ-10
WFPZ-11
WFPZ-12
WFPZ-13
WFPZ-14
WFPZ-15
WFPZ-16
WFPZ-17
WFPZ-18
WFPZ-19
WFPZ-20
WFPZ-21
WFPZ-22
WFPZ-23
WFPZ-24
WFPZ-25
WFPZ-26
WFPZ-27
WFPZ-28
WFPZ-29
WFPZ-30
WFPZ-31
WFPZ-32
WFPZ-33
WFPZ-34
WFPZ-35
WFPZ-36
WFPZ-37
WFPZ-38
WFPZ-39
WFPZ-40


NEWTON FALLS ROAD
ASYss-088M
ASYss-089M
ASYss-090M
ASYss-091M
ASYss-092M
ASYss-093M
ASYss-094M
ASYss-095M
ASYss-096M
ASYss-097M
ASYss-098M
ASYss-099M
ASYss-100M
ASYss-101M
ASYss-102M
ASYss-103M
ASYss-104M
ASYss-105M
ASYss-106M
ASYss-107M
ASYss-108M
ASYss-109M
ASYss-110M
ASYss-111M
ASYss-112M
ASYss-113M
ASYss-114M
ASYss-115M
ASYss-116M
ASYss-117M
ASYss-118M
ASYss-119M
ASYss-120M
ASYss-121M
ASYss-122M
ASYss-123M
ASYss-124M
ASYss-125M
ASYss-126M
ASYss-127M

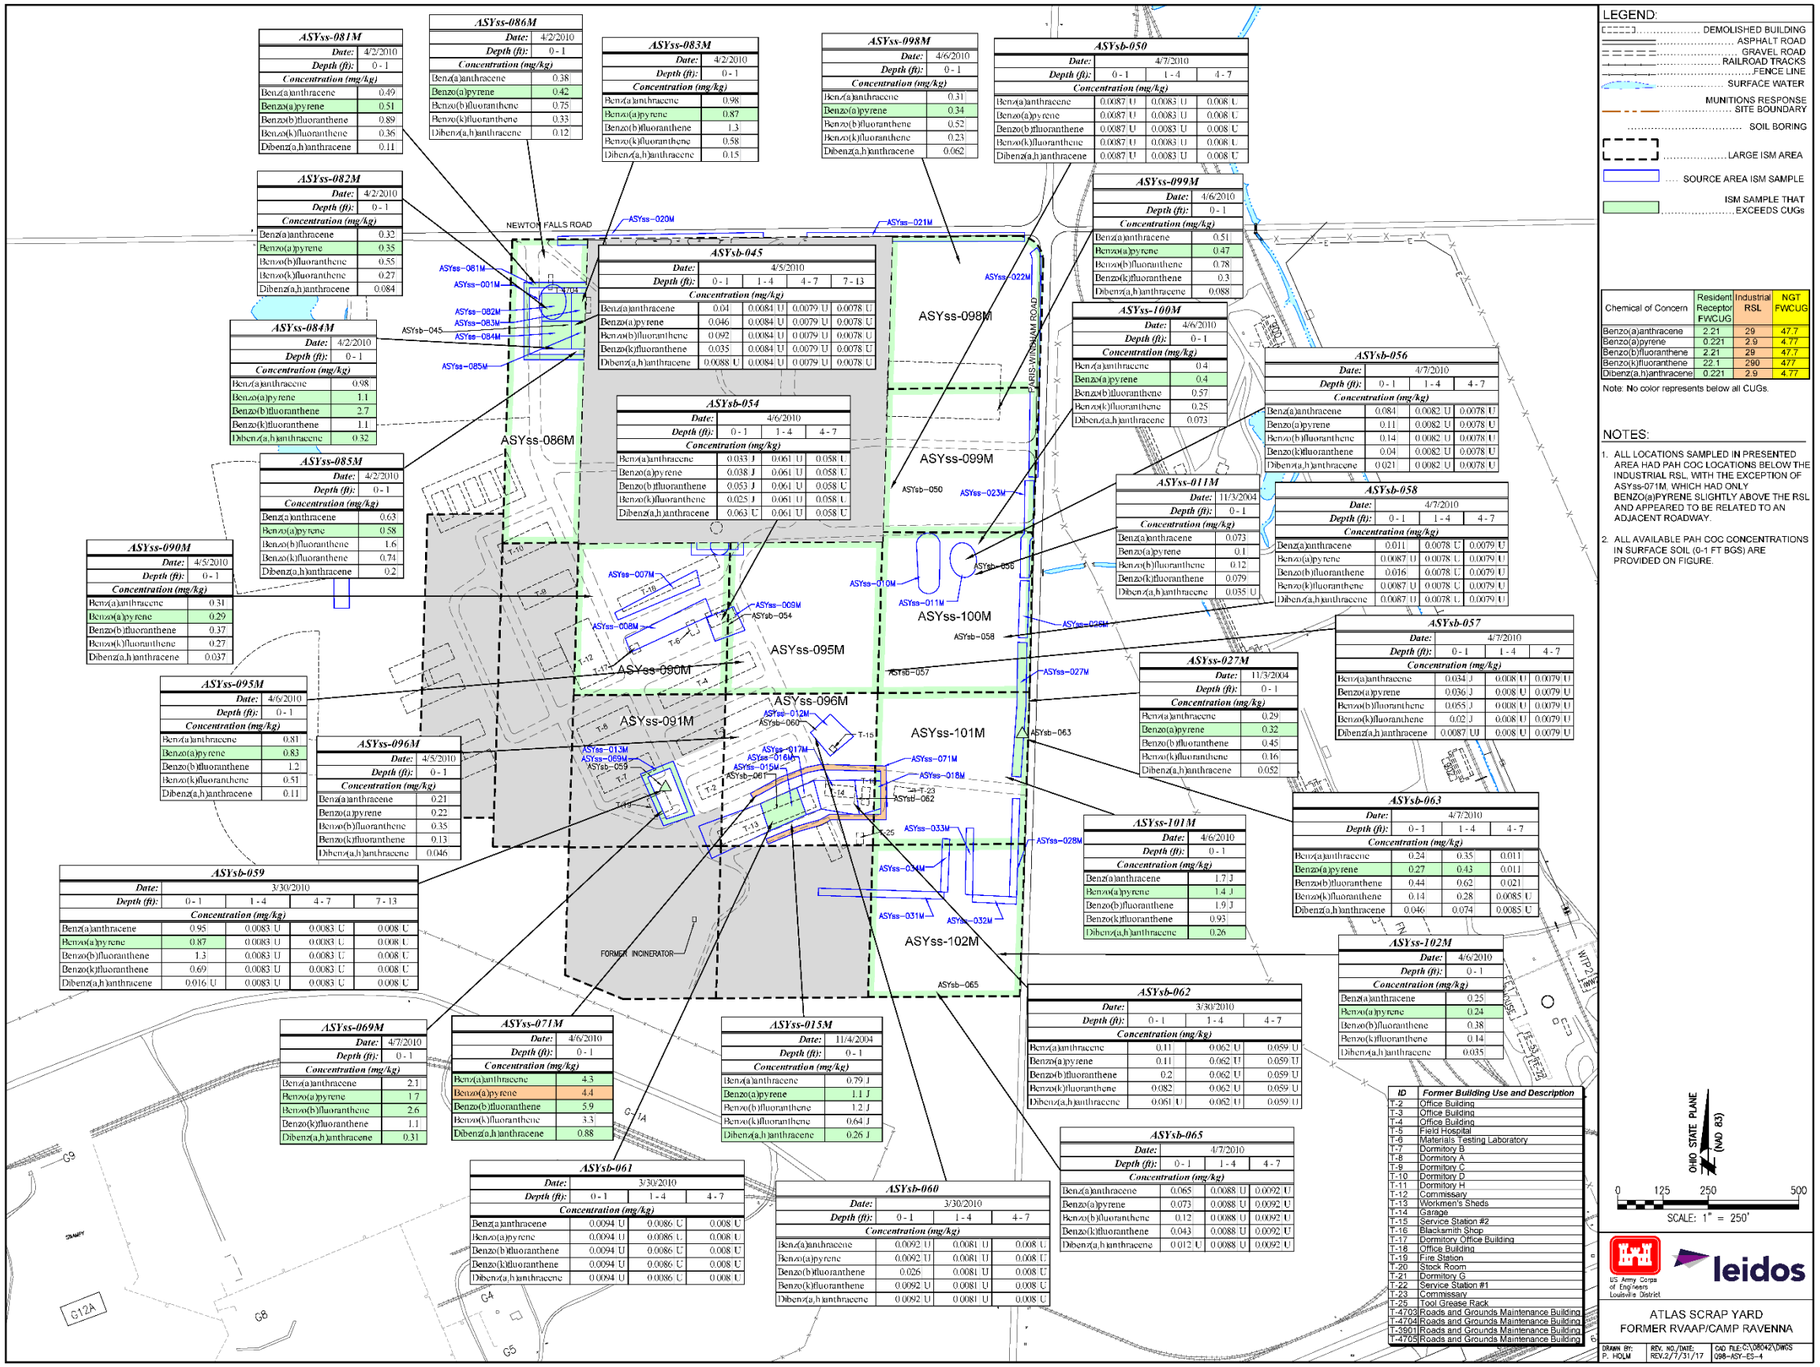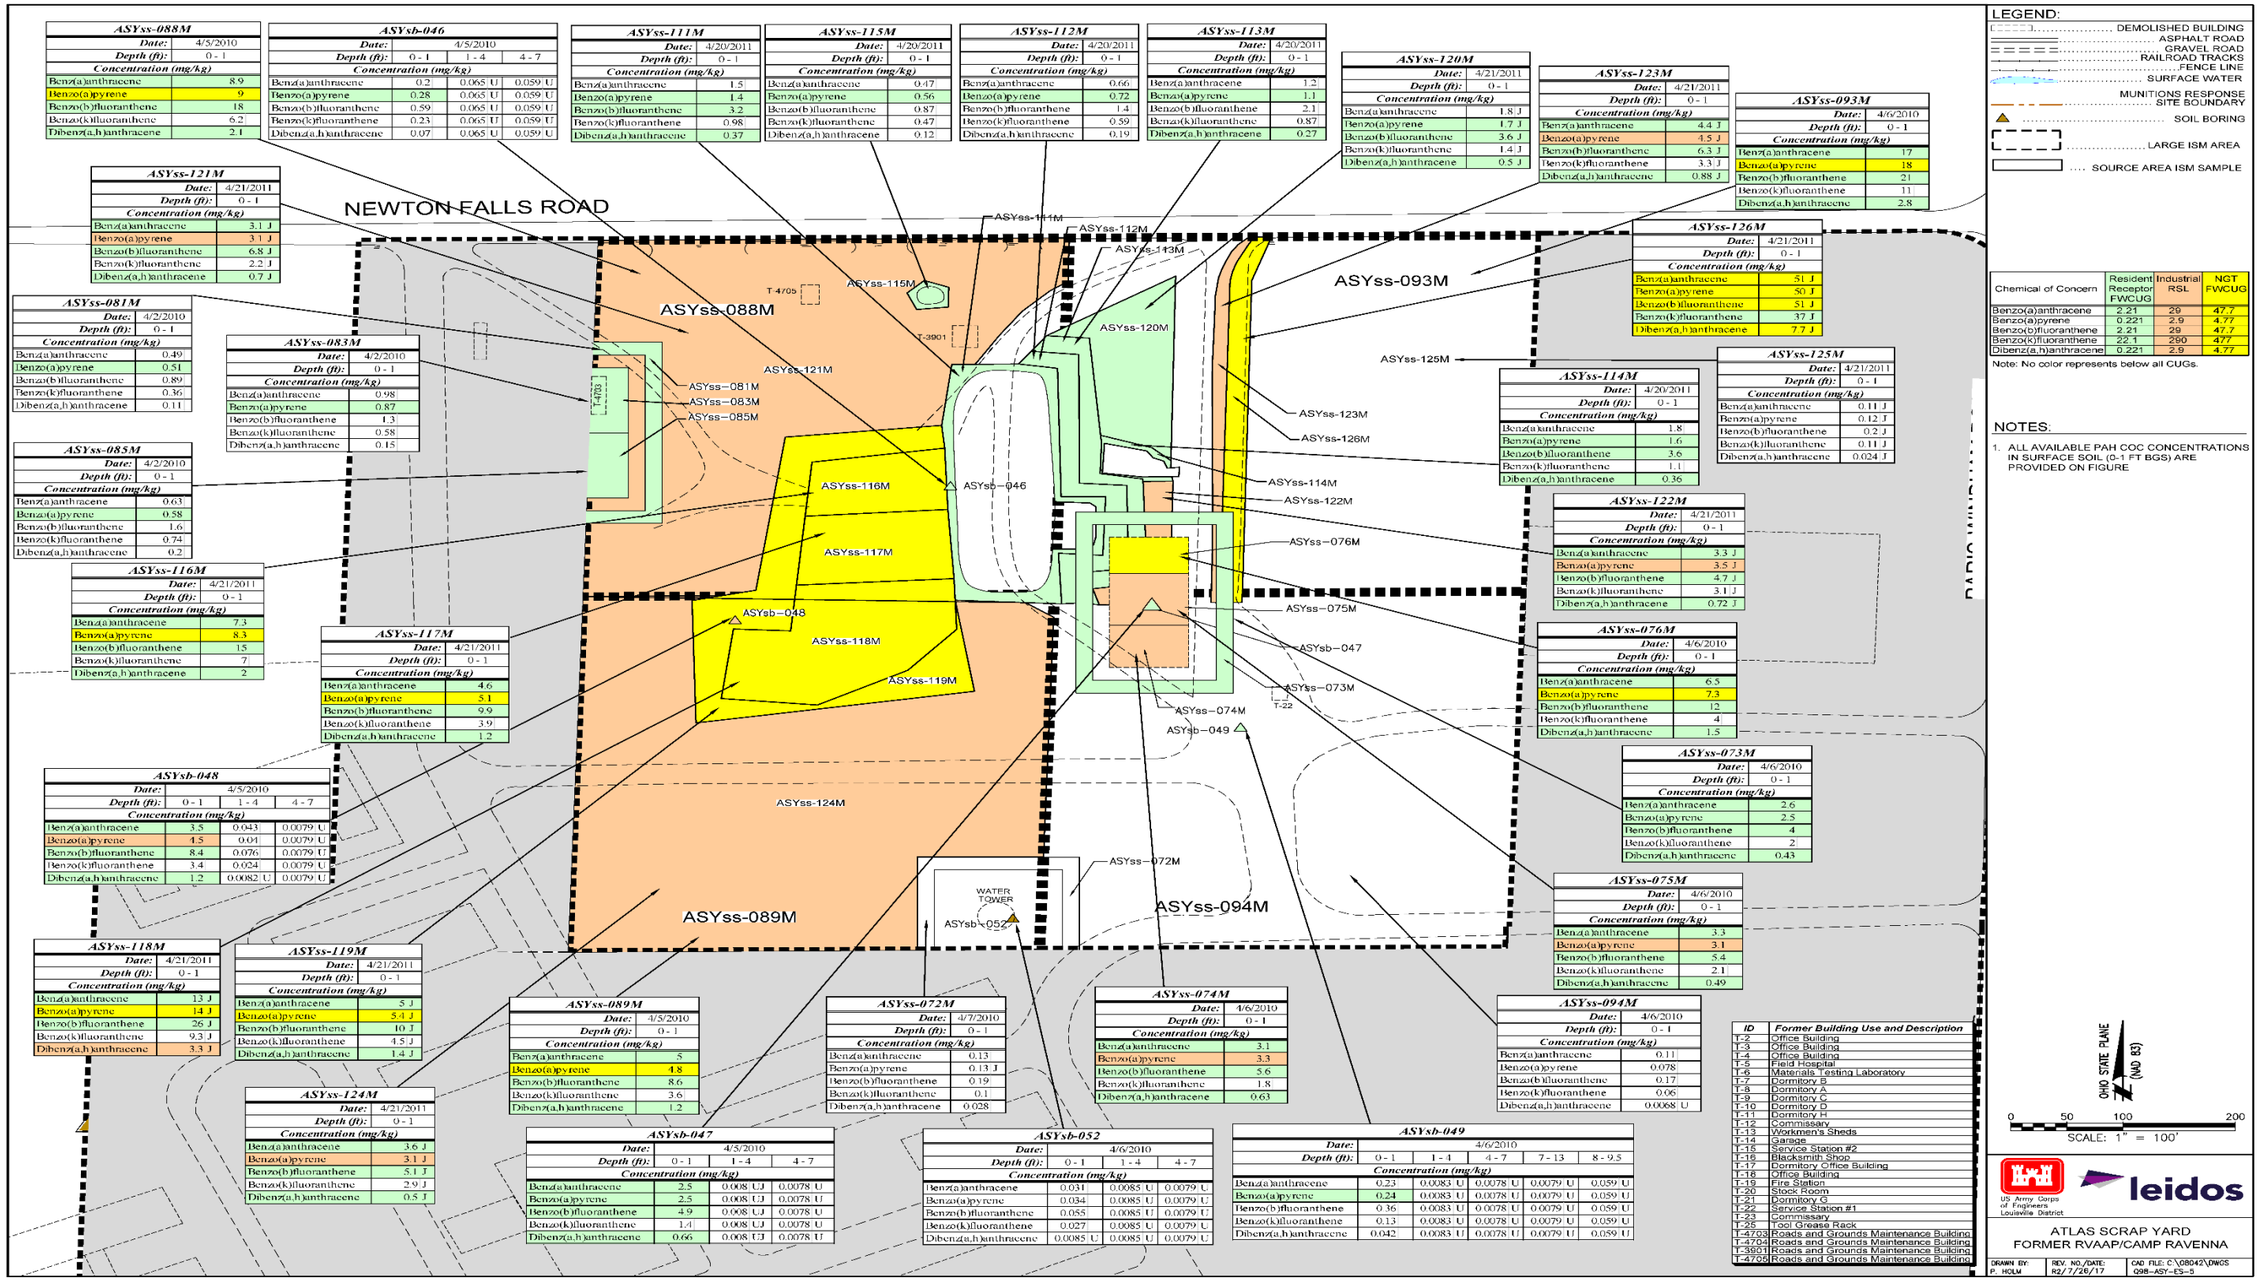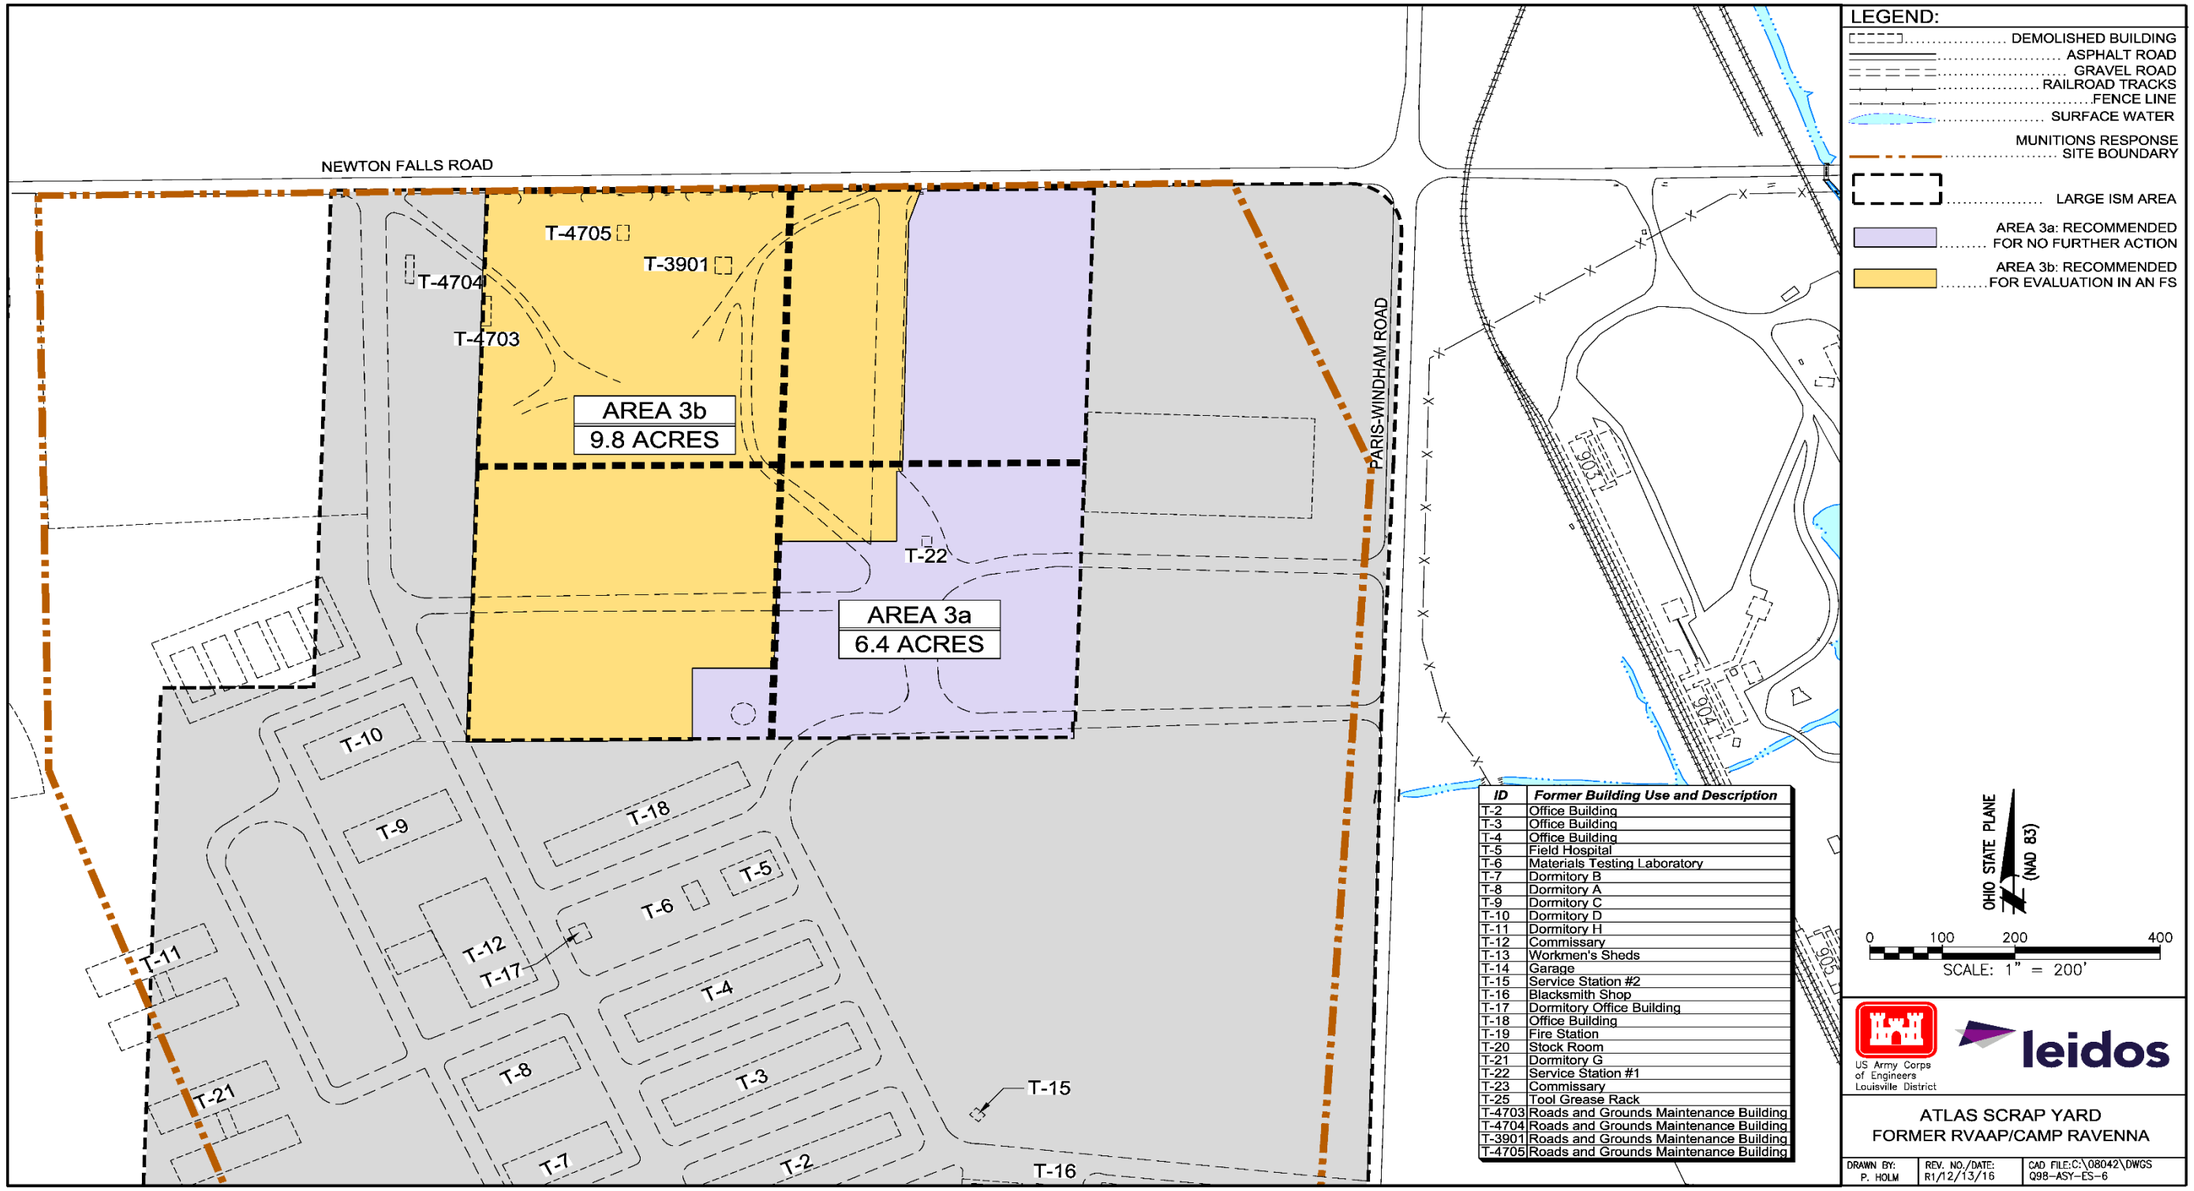

ID	Former Building Use and Description
T-2	Office Building
T-3	Office Building
T-4	Office Building
T-5	Field Hospital
T-6	Materials Testing Laboratory
T-7	Dormitory B
T-8	Dormitory A
T-9	Dormitory C
T-10	Dormitory D
T-11	Dormitory H
T-12	Commissary
T-13	Workmen's Sheds
T-14	Garage
T-15	Service Station #2
T-16	Blacksmith Shop
T-17	Dormitory Office Building
T-18	Office Building
T-19	Fire Station
T-20	Stock Room
T-21	Dormitory G
T-22	Service Station #1
T-23	Commissary
T-25	Tool Grease Rack
T-4703	Roads and Grounds Maintenance Building
T-4704	Roads and Grounds Maintenance Building
T-3901	Roads and Grounds Maintenance Building
T-4705	Roads and Grounds Maintenance Building

Figure ES–6. Area 3 – Recommended Path Forward

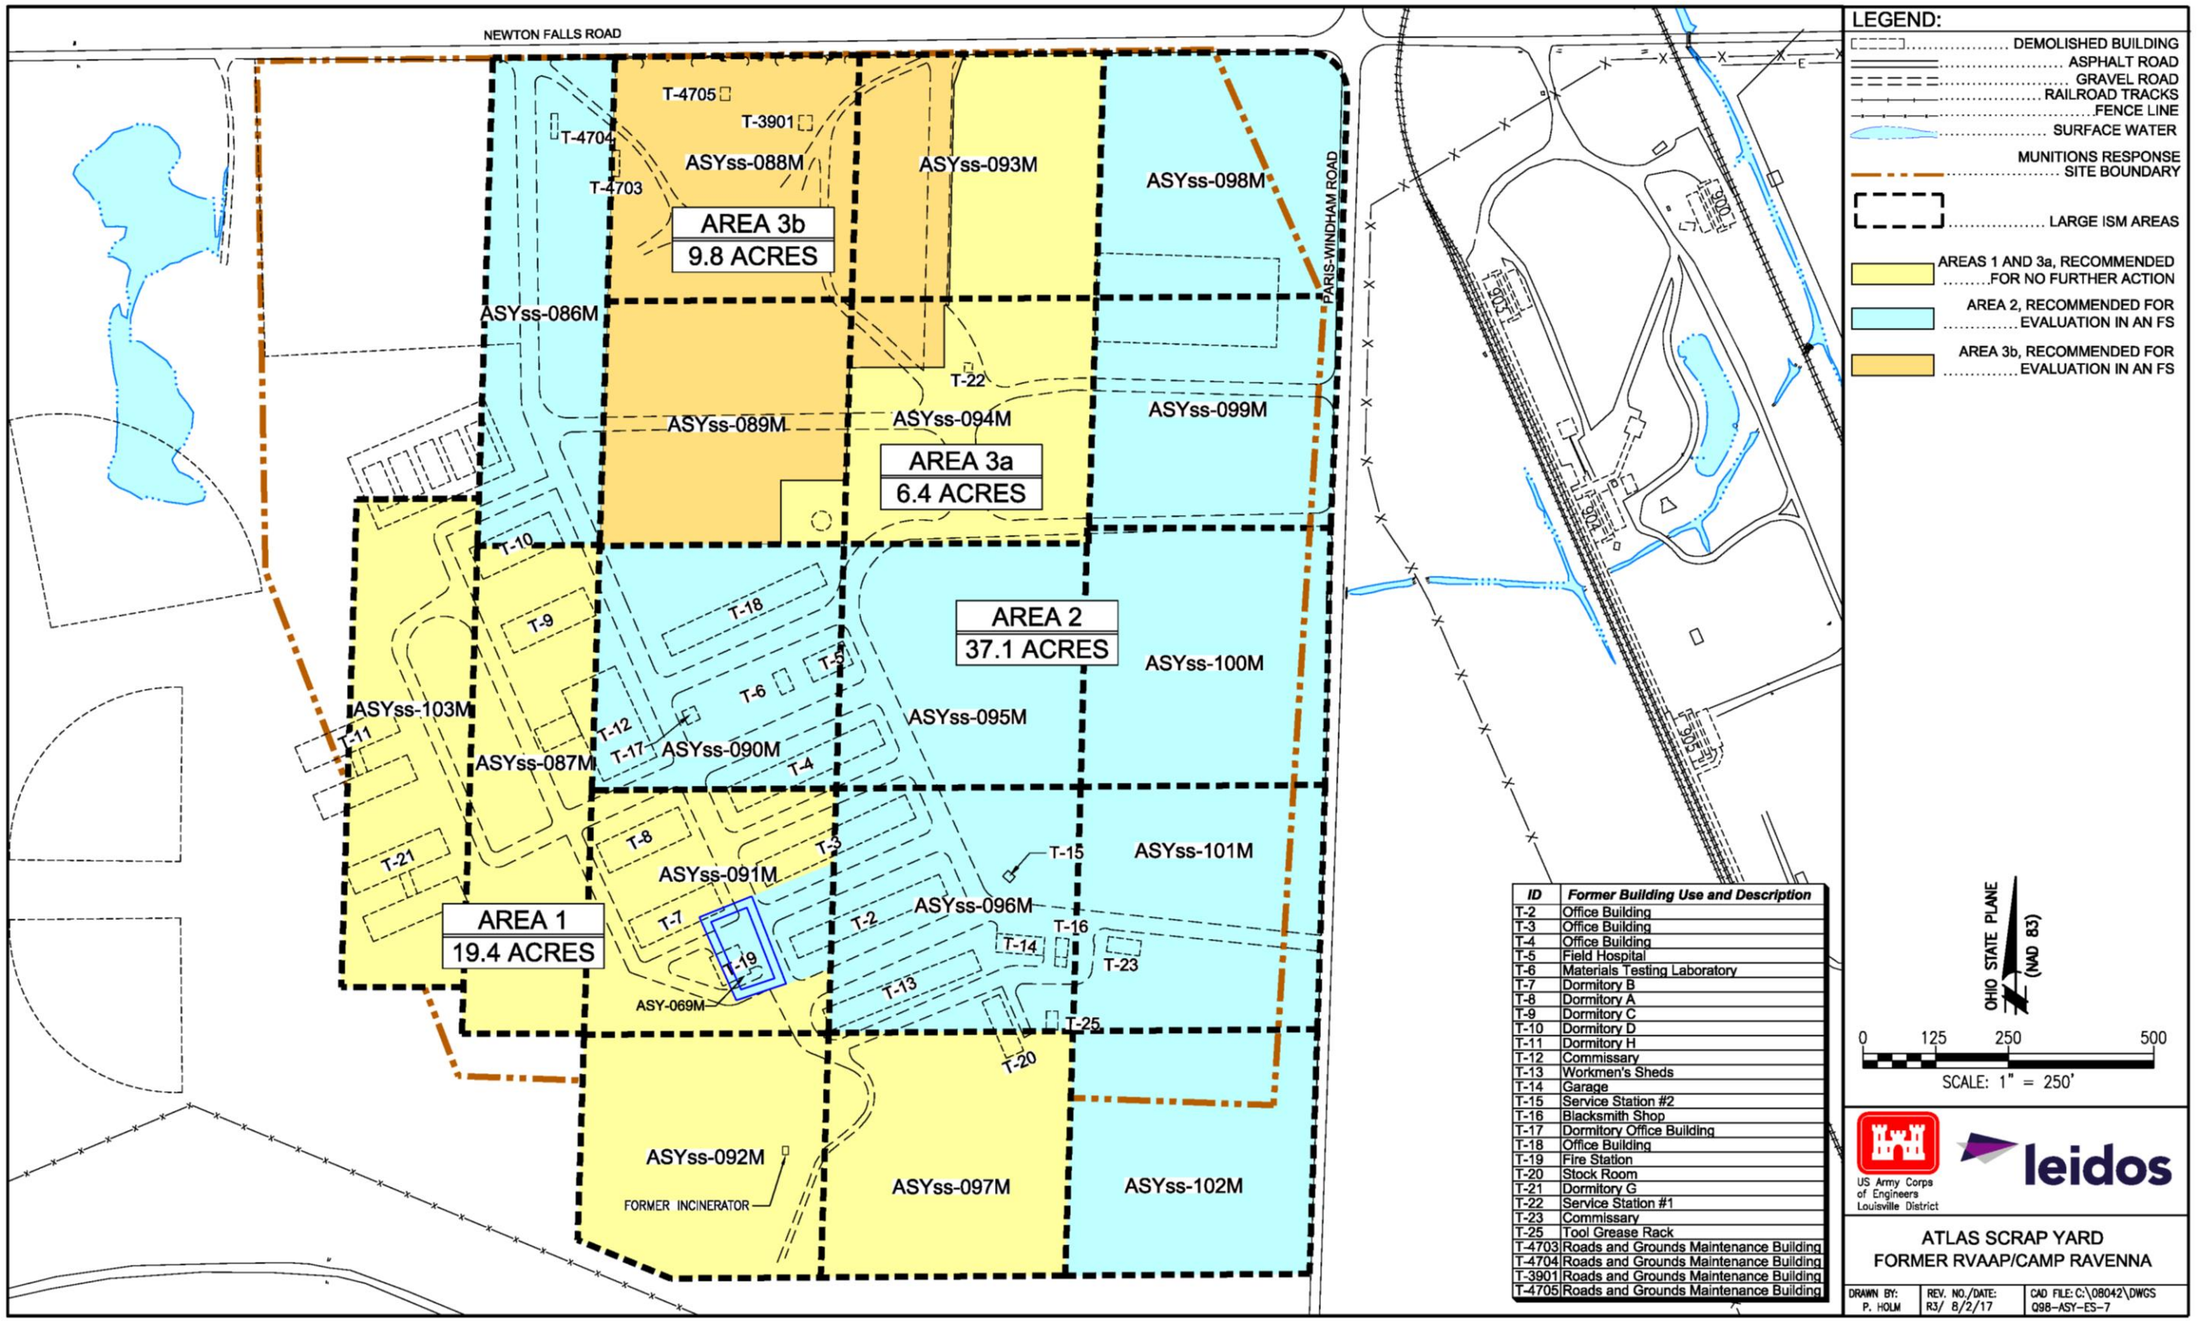


Figure ES–7. Atlas Scrap Yard – Recommended Path Forward for PAH COCs

THIS PAGE INTENTIONALLY LEFT BLANK

1.0 INTRODUCTION

This document was prepared by Leidos, formerly a part of Science Applications International Corporation (SAIC), under the U.S. Army Corps of Engineers (USACE), Louisville District, Multiple Award Remediation Contract (MARC) W912QR-04-D-0028, Delivery Order No. 0001, entitled 2008 Performance-based Acquisition (PBA) for Environmental Investigation and Remediation at the former Ravenna Army Ammunition Plant (RVAAP).

This Remedial Investigation (RI) Report addresses soil, sediment, and surface water at Atlas Scrap Yard at the former RVAAP. Atlas Scrap Yard is designated as area of concern (AOC) RVAAP-50 within the former RVAAP [now known as Camp Ravenna Joint Military Training Center (Camp Ravenna)] in Portage and Trumbull counties, Ohio (Figures 1-1 and 1-2). Planning and performance of all elements of this PBA are in accordance with the requirements of the Ohio Environmental Protection Agency (Ohio EPA) Director's Final Findings and Orders (DFFO) for RVAAP, dated June 10, 2004 (Ohio EPA 2004). The DFFO requires conformance with Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) and the National Oil and Hazardous Substances Pollution Contingency Plan (NCP) to implement an RI to characterize the AOC, develop a Feasibility Study (FS) Report (if necessary) and evaluate remedial alternatives to address contamination presenting unacceptable risk to human health and the environment, present a preferred alternative in a proposed plan (PP), and document stakeholder selection and acceptance of the preferred final remedy in a record of decision (ROD). Figure 1-3 presents this process.

This RI Report for Atlas Scrap Yard presents the following:

- A description of the operational history and environmental setting for Atlas Scrap Yard;
- A summary of all historical assessments and investigations at Atlas Scrap Yard;
- A description of the nature and extent of contamination, including the identification of site-related contaminants (SRCs) by screening historical and Performance-Based Acquisition 2008 Remedial Investigation (PBA08 RI) data against RVAAP background screening values (BSVs), essential human nutrients, and frequency of detection/weight-of-evidence (WOE) screening;
- An evaluation of contaminant fate and transport that identifies contaminant migration chemicals of potential concern (CMCOPCs) and contaminant migration chemicals of concern (CMCOCs) that may pose a future threat to groundwater;
- A human health risk assessment (HHRA) to identify chemicals of potential concern (COPCs) and chemicals of concern (COCs);
- An ecological risk assessment (ERA) to identify chemicals of potential ecological concern (COPECs) and chemicals of ecological concern; and
- Conclusions of the report.

Based on the outcome of the evaluation in this RI Report, remedial alternatives will be developed and evaluated in an FS, and the preferred alternative will be submitted for public review and comment in

a PP. Public comments will be considered in the final selection of a remedy, which will be documented in the ROD.

1.1 PURPOSE

The purpose of the PBA08 RI at Atlas Scrap Yard was to supplement data from previous sampling events to delineate the nature and extent of contamination, evaluate contaminant fate and transport, and complete an HHRA and ERA to support remedial decisions. Depending on the results of the RI, a conclusion of no further action (NFA) is provided or a recommendation to complete an FS to evaluate potential remedies and future actions will be made.

1.2 SCOPE

The scope of this RI Report is to present: (1) the nature and extent of contamination, fate and transport of contaminants in the environment, and risk assessments for surface and subsurface soil at Atlas Scrap Yard; and (2) a conclusion of NFA or a recommendation for an FS to evaluate remedial alternatives to address CERCLA-related COCs requiring remediation at the AOC.

For the purposes of this report, the term "surface soil" includes dry sediment. Dry sediment refers to unconsolidated inorganic and organic material within conveyances, ditches, or low lying areas that occasionally may be covered with water, usually following a precipitation event or due to snowmelt. Dry sediment is not covered with water for extended periods and typically is dry within seven days of precipitation. Dry sediment does not function as a permanent habitat for aquatic organisms, although it may serve as a natural medium for the growth of terrestrial organisms. Dry sediment is addressed the same as surface soil [0–1 ft below ground surface (bgs)] in terms of contaminant nature and extent, fate and transport, and risk exposure models. The term "sediment," as used in this report, refers to wet sediment within conveyances, ditches, wetlands, or water bodies that are inundated for extended periods of time. These definitions and terminology usage are consistent with the *Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio* (USACE 2010a) (herein referred to as the FWCUG Report). Sediment and perennial surface water are not present within the AOC. Surface water is only present at the AOC during times of heavy rainfall and discharges towards Load Line 12 under Paris-Windham Road.

Potential impacts to groundwater from soil (e.g., contaminant leaching) are evaluated in this report, as protectiveness to groundwater is included in the fate and transport analysis. However, groundwater will be evaluated as an individual AOC for the entire facility (designated as RVAAP-66) and addressed in a separate RI Report. All buildings and structures at Atlas Scrap Yard have been demolished; therefore, they are not evaluated as continuing sources of contamination in this report.

Only sanitary sewers are present at Atlas Scrap Yard; evidence of a former storm sewer network could not be found. As part of the RVAAP-67 Facility-wide Sewers RI, sewer sediment, sewer water, and pipe bedding material media were sampled and evaluated and inorganic chemicals and semi-volatile organic compounds (SVOCs) were identified as the predominant sewer SRCs. Additionally, fate and transport modeling was performed, and an HHRA and ERA were conducted for sewers at the

Atlas Scrap Yard. These evaluations concluded that NFA is recommended with respect to the facility-wide sewers within Atlas Scrap Yard. The full evaluation with conclusion is presented in the *Remedial Investigation/Feasibility Study Report for RVAAP-67 Facility-wide Sewers* (USACE 2012d).

1.3 REPORT ORGANIZATION

This report is organized in accordance with Ohio EPA and U.S. Environmental Protection Agency (USEPA) CERCLA RI and applicable USACE guidance. The following is a summary of the components of the report and a list of appendices:

- Section 2.0 provides the history of the former RVAAP and Atlas Scrap Yard, outlines potential sources of contamination, presents potential receptors, and summarizes co-located or proximate sites at Atlas Scrap Yard;
- Section 3.0 describes the environmental setting at Camp Ravenna and Atlas Scrap Yard, including the geology, hydrogeology, climate, and population;
- Section 4.0 summarizes previous assessments and investigations at Atlas Scrap Yard, as well as the data used to support this RI;
- Section 5.0 discusses the occurrence and distribution of contamination at the AOC;
- Section 6.0 presents an evaluation of contaminant fate and transport;
- Section 7.0 includes the methods and results of the HHRA and ERA;
- Section 8.0 provides the conclusions of the RI; and
- Section 9.0 provides references.
- Appendices:
    - Appendix A. Field Sampling Logs
    - Appendix B. Project Quality Assurance Summary
    - Appendix C. Data Quality Control Summary Report
    - Appendix D. Laboratory Analytical Results and Chains of Custody
    - Appendix E. Fate and Transport Modeling Results
    - Appendix F. Investigation-derived Waste Management Reports
    - Appendix G. Human Health Risk Assessment Tables
    - Appendix H. Ecological Risk Assessment Information and Data
    - Appendix I. Ordnance and Explosives Avoidance Survey Report
    - Appendix J. PBA08 Remedial Investigation Summary
    - Appendix K. Ohio EPA Comments


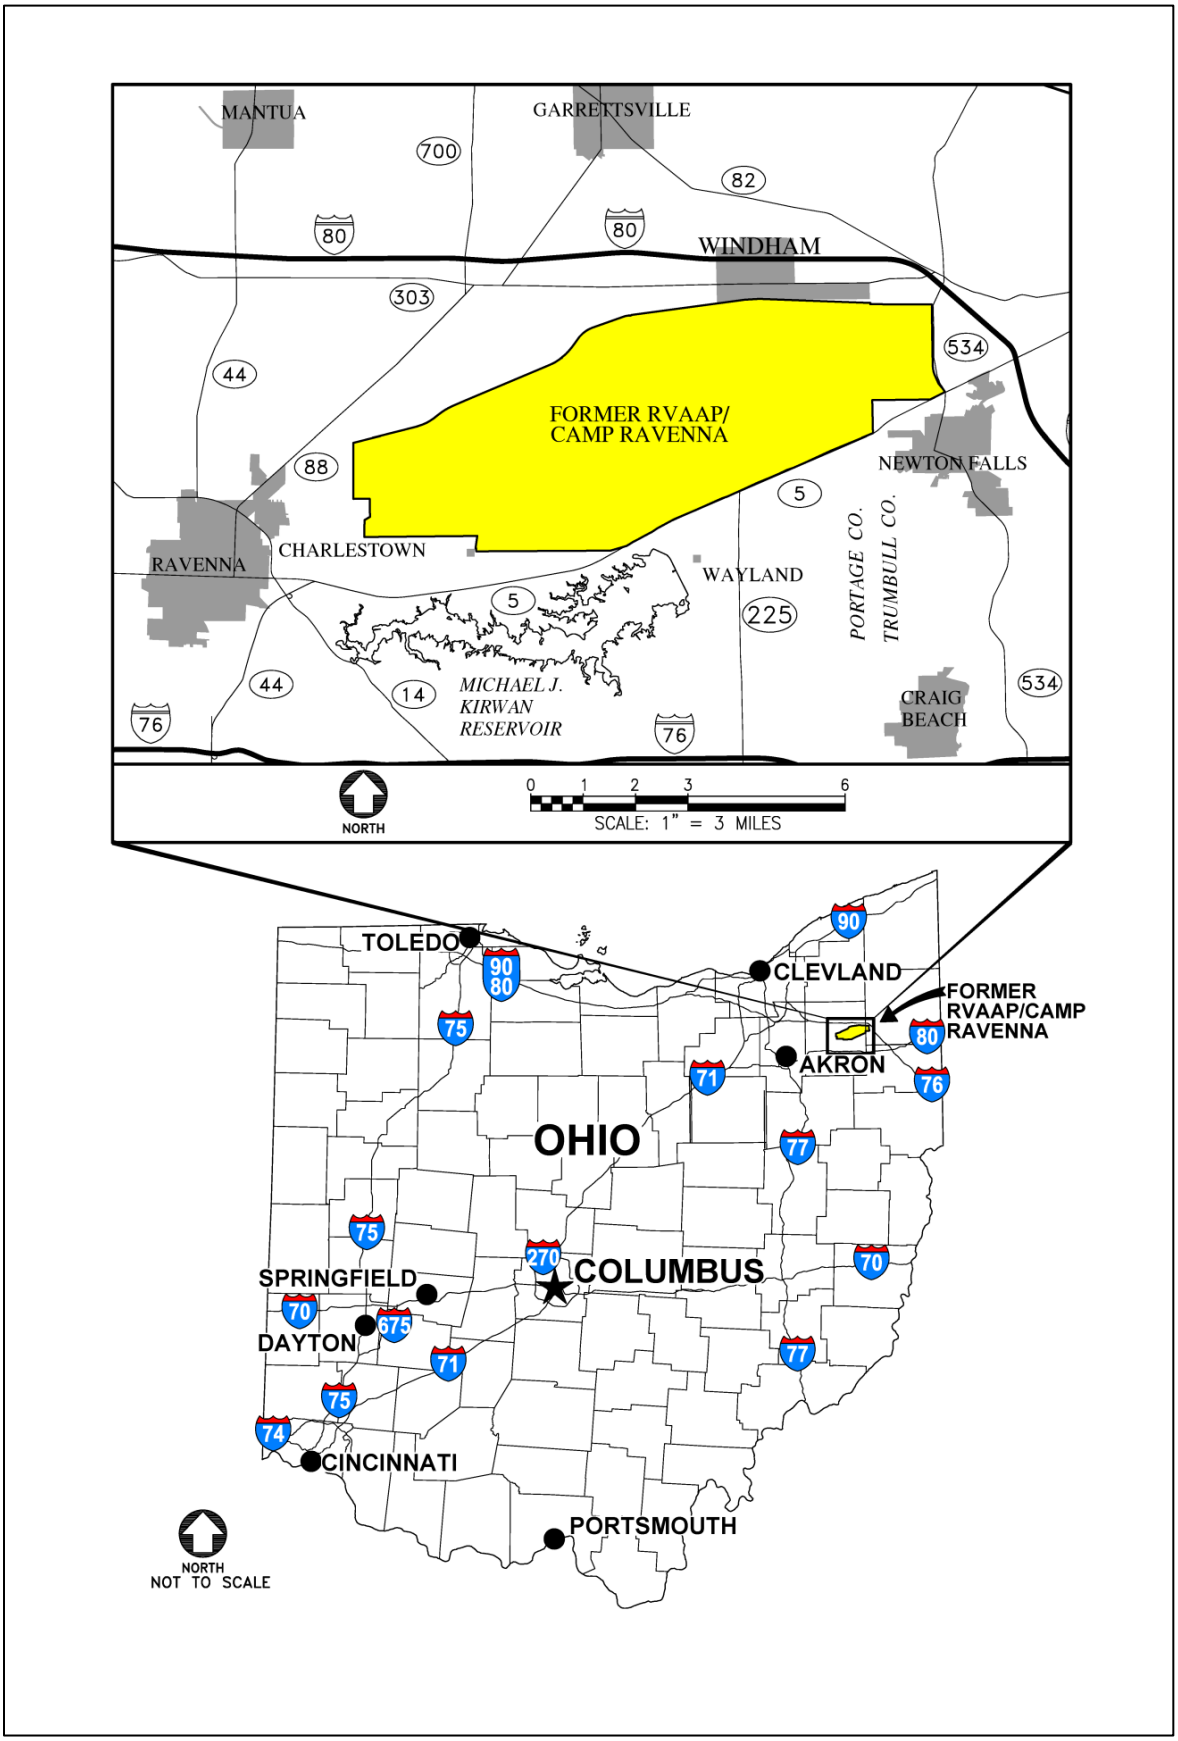


Figure 1–1. General Location and Orientation of Camp Ravenna

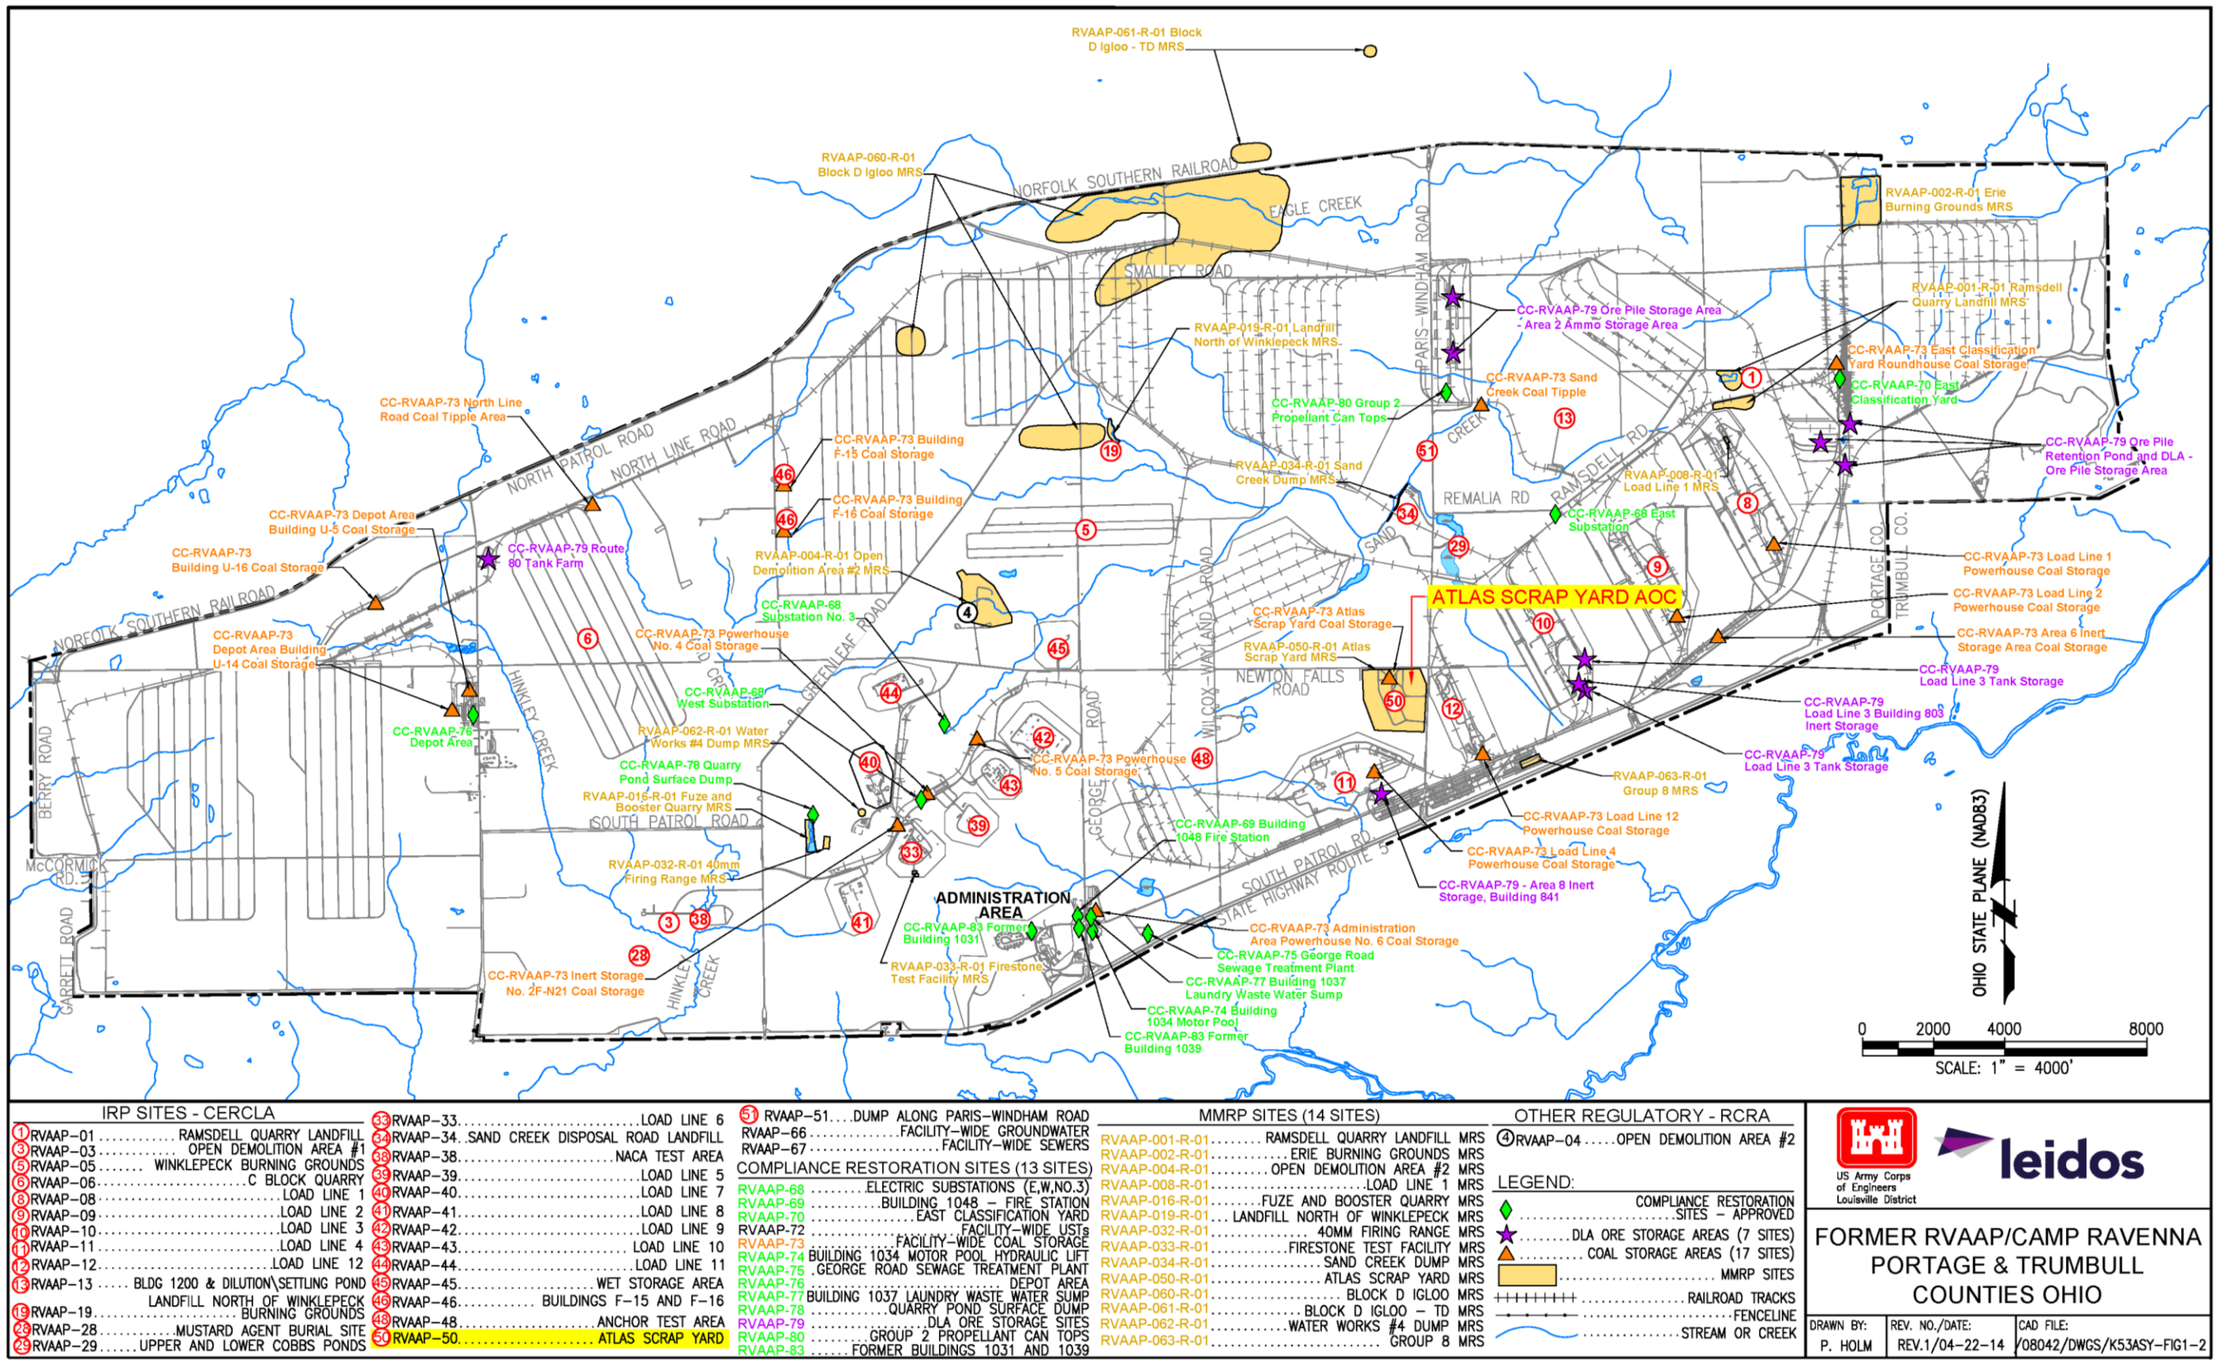

IRP SITES - CERCLA

1	RVAAP-01	RAMSDELL QUARRY LANDFILL	
3	RVAAP-03	OPEN DEMOLITION AREA #1	
5	RVAAP-05	WINKLEPECK BURNING GROUNDS	
6	RVAAP-06	C BLOCK QUARRY	
8	RVAAP-08	LOAD LINE 1	
9	RVAAP-09	LOAD LINE 2	
10	RVAAP-10	LOAD LINE 3	
11	RVAAP-11	LOAD LINE 4	
12	RVAAP-12	LOAD LINE 12	
13	RVAAP-13	BLDG 1200 & DILUTION\SETTLING POND	
		LANDFILL NORTH OF WINKLEPECK	
19	RVAAP-19	BURNING GROUNDS	
28	RVAAP-28	MUSTARD AGENT BURIAL SITE	
29	RVAAP-29	UPPER AND LOWER COBBS PONDS	
33	RVAAP-33	LOAD LINE 6	
34	RVAAP-34	SAND CREEK DISPOSAL ROAD LANDFILL	
38	RVAAP-38	NACA TEST AREA	
39	RVAAP-39	LOAD LINE 5	
40	RVAAP-40	LOAD LINE 7	
41	RVAAP-41	LOAD LINE 8	
42	RVAAP-42	LOAD LINE 9	
43	RVAAP-43	LOAD LINE 10	
44	RVAAP-44	LOAD LINE 11	
45	RVAAP-45	WET STORAGE AREA	
46	RVAAP-46	BUILDINGS F-15 AND F-16	
48	RVAAP-48	ANCHOR TEST AREA	
50	RVAAP-50	ATLAS SCRAP YARD	
51	RVAAP-51	DUMP ALONG PARIS-WINDHAM ROAD	
	RVAAP-66	FACILITY-WIDE GROUNDWATER	
	RVAAP-67	FACILITY-WIDE SEWERS	

COMPLIANCE RESTORATION SITES (13 SITES)

RVAAP-68	ELECTRIC SUBSTATIONS (E,W,NO.3)
RVAAP-69	BUILDING 1048 – FIRE STATION
RVAAP-70	EAST CLASSIFICATION YARD
RVAAP-72	FACILITY-WIDE USTs
RVAAP-73	FACILITY-WIDE COAL STORAGE
RVAAP-74	BUILDING 1034 MOTOR POOL HYDRAULIC LIFT
RVAAP-75	GEORGE ROAD SEWAGE TREATMENT PLANT
RVAAP-76	DEPOT AREA
RVAAP-77	BUILDING 1037 LAUNDRY WASTE WATER SUMP
RVAAP-78	QUARRY POND SURFACE DUMP
RVAAP-79	DLA ORE STORAGE SITES
RVAAP-80	GROUP 2 PROPELLANT CAN TOPS
RVAAP-83	FORMER BUILDINGS 1031 AND 1039

MMRP SITES (14 SITES)

RVAAP-001-R-01	RAMSDELL QUARRY LANDFILL MRS
RVAAP-002-R-01	ERIE BURNING GROUNDS MRS
RVAAP-004-R-01	OPEN DEMOLITION AREA #2 MRS
RVAAP-008-R-01	LOAD LINE 1 MRS
RVAAP-016-R-01	FUZE AND BOOSTER QUARRY MRS
RVAAP-019-R-01	LANDFILL NORTH OF WINKLEPECK MRS
RVAAP-032-R-01	40MM FIRING RANGE MRS
RVAAP-033-R-01	FIRESTONE TEST FACILITY MRS
RVAAP-034-R-01	SAND CREEK DUMP MRS
RVAAP-050-R-01	ATLAS SCRAP YARD MRS
RVAAP-060-R-01	BLOCK D IGLOO MRS
RVAAP-061-R-01	BLOCK D IGLOO – TD MRS
RVAAP-062-R-01	WATER WORKS #4 DUMP MRS
RVAAP-063-R-01	GROUP 8 MRS

OTHER REGULATORY - RCRA

4	RVAAP-04 OPEN DEMOLITION AREA #2

LEGEND:

- COMPLIANCE RESTORATION SITES – APPROVED
- DLA ORE STORAGE AREAS (7 SITES)
- COAL STORAGE AREAS (17 SITES)
- MMRP SITES
- RAILROAD TRACKS
- FENCELINE
- STREAM OR CREEK

US Army Corps of Engineers Louisville District

leidos

FORMER RVAAP/CAMP RAVENNA
PORTAGE & TRUMBULL
COUNTIES OHIO

DRAWN BY:	REV. NO./DATE:	CAD FILE:
P. HOLM	REV.1/04-22-14	/08042/DWGS/K53ASY-FIG1-2

Figure 1–2. Location of AOCs and Munitions Response Sites at Camp Ravenna

THIS PAGE INTENTIONALLY LEFT BLANK.

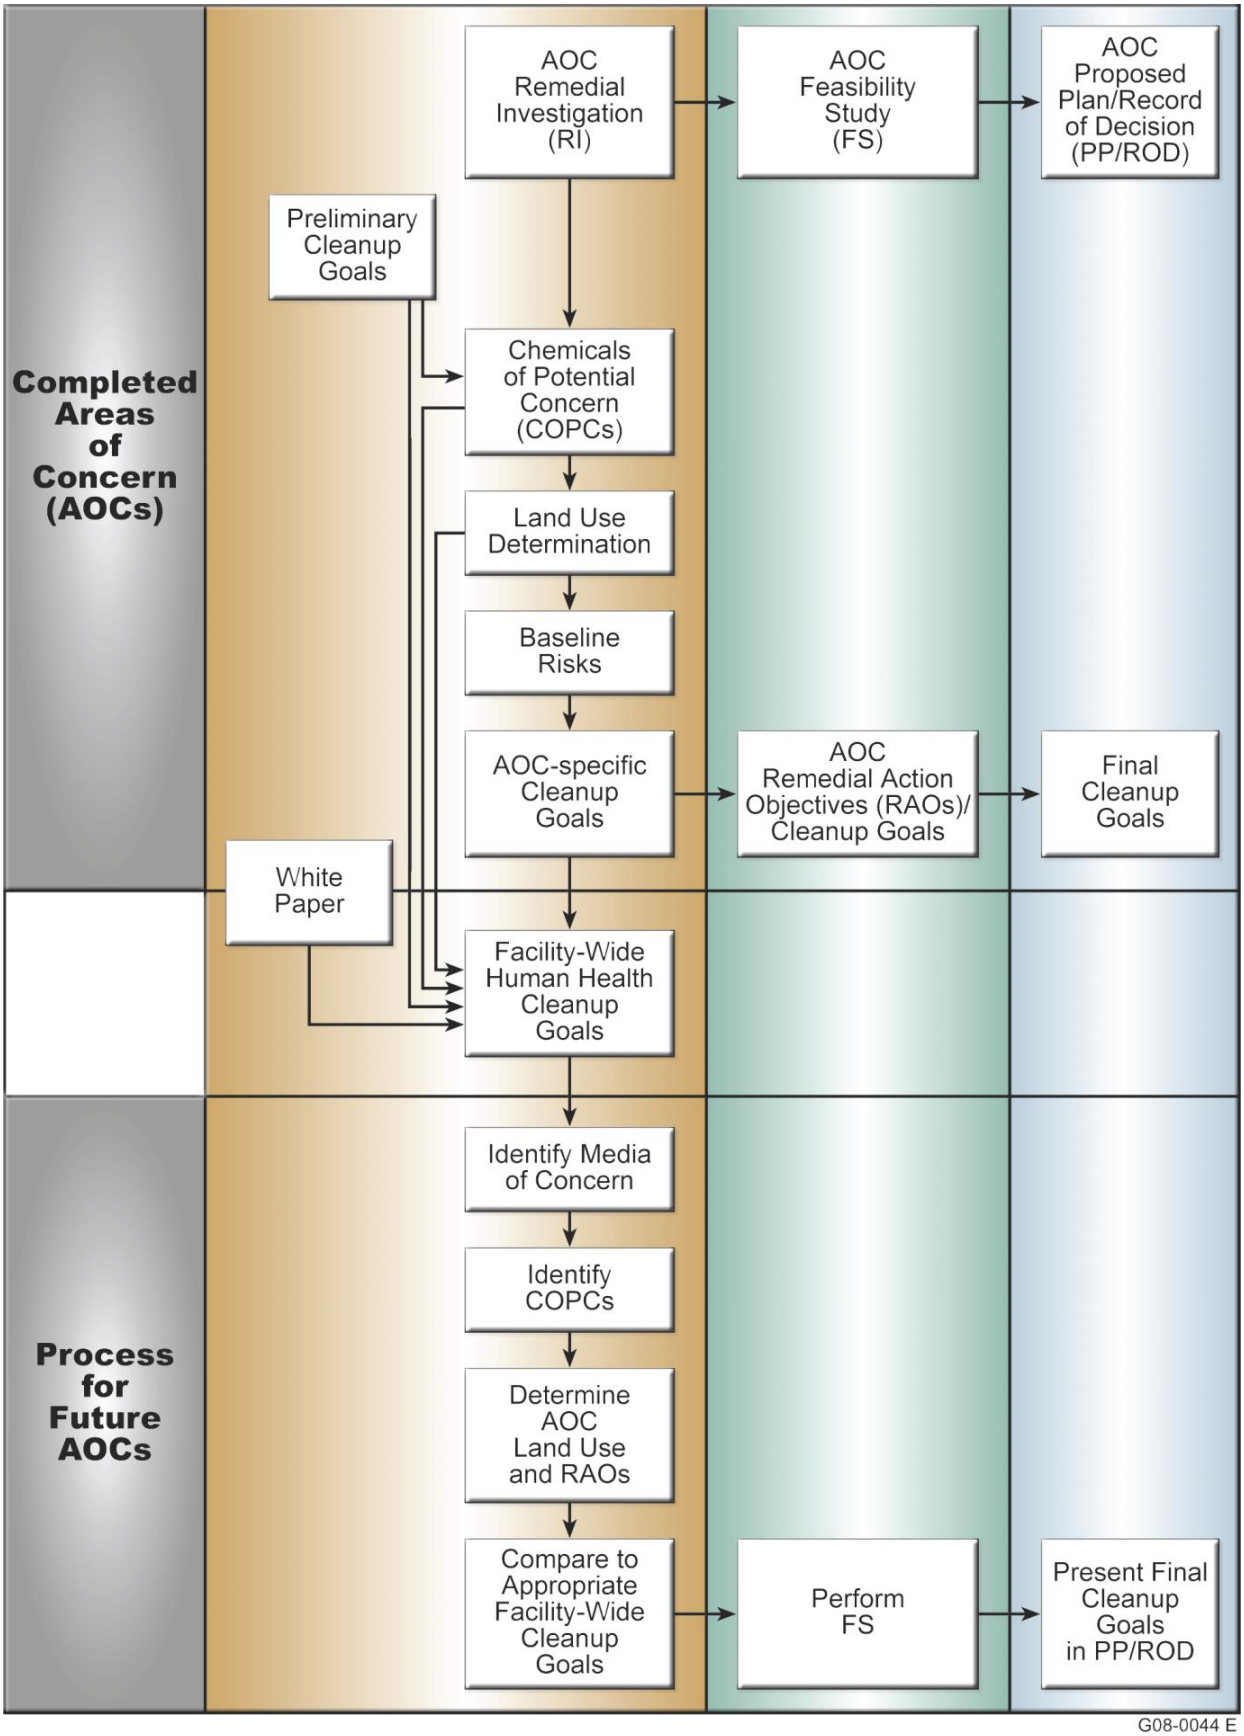


Figure 1–3. Process for Developing Remedial Decisions at Areas of Concern (USACE 2010a)

THIS PAGE INTENTIONALLY LEFT BLANK.

2.0 BACKGROUND

This section provides a description of the Camp Ravenna facility. In addition, it provides a summary of Atlas Scrap Yard operational history, potential sources, building demolition activities, and co-located or proximate sites, and potential site-related releases.

2.1 FACILITY-WIDE BACKGROUND INFORMATION

2.1.1 General Facility Description

The facility, consisting of 21,683 acres, is located in northeastern Ohio within Portage and Trumbull counties, approximately 4.8 kilometers (3 miles) east/northeast of the City of Ravenna and approximately 1.6 kilometers (1 mile) northwest of the City of Newton Falls. The facility, previously known as RVAAP, was formerly used as a load, assemble, and pack facility for munitions production. As of September 2013, administrative accountability for the entire acreage of the facility has been transferred to the U.S. Property and Fiscal Officer (USP&FO) for Ohio and subsequently licensed to the Ohio Army National Guard (OHARNG) for use as a military training site (Camp Ravenna). References in this document to RVAAP relate to previous activities at the facility as related to former munitions production activities or to activities being conducted under the restoration/cleanup program.

The former RVAAP received bulk 2,4,6-trinitrotoluene (TNT) product during operational activities and did not manufacture/produce 2,6-dinitrotoluene (DNT) or TNT. A facility where DNT is manufactured will have the following isomers of DNT in the finished product: 2,4-DNT; 2,6-DNT; 2,5-DNT; 3,4-DNT; 2,3-DNT; 3,5-DNT. This is not applicable to the former RVAAP. Degradation of TNT to 2,4-DNT occurs in soil; however, 2,4-DNT and 2,6-DNT do not degrade to the lesser isomers. It is the U.S. Department of the Army's (U.S. Army) position that testing DNT isomers other than 2,4- and 2,6-DNT is unnecessary and has no additional value of being protective to human health and the environment at former RVAAP (RVAAP 2013).

2.1.2 Demography and Land Use

Camp Ravenna occupies east-central Portage County and southwestern Trumbull County. Census projections for 2010 indicated the populations of Portage and Trumbull counties are 161,419 and 210,312, respectively. Population centers closest to Camp Ravenna are Ravenna (population of 11,724) and Newton Falls (population of 4,795).

The facility is located in a rural area and is not close to any major industrial or developed areas. Approximately 55% of Portage County, where the majority of Camp Ravenna is located, consists of either woodland or farmland acreage. The closest major recreational area, the Michael J. Kirwan Reservoir (also known as West Branch Reservoir), is located adjacent to the western half of Camp Ravenna, south of State Route 5.

Camp Ravenna is federally owned and is licensed to the OHARNG for use as a military training site. Restoration activities at Camp Ravenna are managed by the Army National Guard and OHARNG. Training and related activities at Camp Ravenna include field operations and bivouac training, convoy training, maintaining equipment, C-130 aircraft drop zone operations, helicopter operations, and storing heavy equipment.

2.2 ATLAS SCRAP YARD BACKGROUND INFORMATION

2.2.1 Operational History

Atlas Scrap Yard, formally known as the construction camp, is approximately 73 acres and is located in the southeastern portion of Camp Ravenna (Figure 2-1). There is no fence around the AOC as a perimeter boundary, but the AOC is bordered by Newton Falls Road to the north and Paris-Windham Road to the east. Load Line 4 is located to the south of the AOC. The interior of the AOC is currently vegetated with shrub/scrub vegetation in unpaved areas and is forested around its perimeter. The north-central portion of Atlas Scrap Yard is sparsely vegetated due to extensive gravel and mulch-like material cover. Additionally, stockpiles of concrete debris, railroad ties, and telephone poles are present.

Atlas Scrap Yard has served several operational functions over the history of the former RVAAP, but the AOC was never used for munitions production activities. From 1940–1945, Atlas Scrap Yard operated as a construction camp to house workers and their families during construction of the facility. By the end of World War II, the majority of buildings and structures at Atlas Scrap Yard were demolished or relocated to other areas of the facility. Following World War II through the 1950s, four additional storage structures were constructed in the north central storage and stockpiling area. These new structures, along with the pre-World War II structures that remained, were used to support roads and grounds maintenance activities. All remaining structures were razed after the Vietnam War.

Water production wells were present during the historical activities at Atlas Scrap Yard. A surveyor's field book from 1941 indicated that Well #1 may be present at Atlas Scrap Yard. However, the field book indicated the well could not be located. The U.S. Army also conducted a site walk in March 2015 and could not identify any indication that Well #1 was indeed at Atlas Scrap Yard. Well #2 was abandoned in the 1990s, and Well #3 is planned to be abandoned by the U.S. Army.

Buildings constructed prior to 1987 may contain asbestos-containing materials. Transite roofing and siding was used on a majority of buildings and potentially at this AOC (Pfingsten 2009). Information is not available whether abatement of asbestos and potentially lead-based paint was performed prior to demolition of all buildings at the AOC, and the presence of asbestos was not an objective for site characterization activities.

After the Vietnam War, the north central portion of Atlas Scrap Yard became exclusively utilized as a stockpile storage area for bulk material, including gravel, railroad ballasts, sand, culvert pipe, railroad ties, and telephone poles. This north central portion of Atlas Scrap Yard is still actively utilized for

ongoing materials storage. Any potential solid waste units at Atlas Scrap Yard will be addressed separately under the Installation Restoration Program (IRP) through a project which will identify the solid waste management units (SWMUs)/storage areas at Camp Ravenna and indicate how to appropriately manage them.

A crushed slag parking area is located in the north-central portion of Atlas Scrap Yard. The source of slag at Atlas Scrap Yard is not known. However, records indicate that an inestimable amount of aggregate could have come from plant that processed furnace slag in Youngstown, Ohio (Pfingsten 2009). Coal, used for building process heat, was piled in several areas of the AOC, including the north central stockpiling area (USACE 2011). The central-east portion of the AOC was a staging area for salvaged ammunition boxes from demilitarized Vietnam War munitions.

The AOC can be divided into two exposure units (EUs), the active storage area (ASA) and the inactive area (IA), as illustrated on Figure 2-1. The ASA consists of approximately 14.9 acres and is located in the north central portion of the AOC. The ASA was historically used as a crushed slag parking area from 1940–1945 when the construction camp was operational (Wilbur et al., 1942). Since 1945, the ASA has been utilized for stockpiling a variety of salvaged inert materials, including railroad ties and concrete and brick and is currently active. The slag parking area is still in place, but infrequently used for parking and slightly overgrown with vegetation. The remaining 57.6 acres of the IA in Atlas Scrap Yard are not actively utilized for storage.

2.2.2 Potential Sources

Historical facilities at Atlas Scrap Yard included 25 buildings used during World War II and 8 buildings used from 1945 through the Vietnam War. The locations of the former buildings are shown on Figure 2-1. There are no records to document the existence of Buildings T-1 and T-24.

Former buildings and site features that are not expected to be potential sources of contamination are presented and described below.

- Buildings T-2, T-3, T-4 – Utilized as office buildings during World War II and moved to Administration Area by December 1944.
- Building T-5 – Utilized as a field hospital during World War II until the main hospital opened in the Administration Area in 1943. T-5 was moved to the Administration Area by December 1944.
- Buildings T-8, T-9, T-10 – Utilized as dormitories and were razed by 1945.
- Buildings T-7, T-11, T-17, T-21 – Utilized as dormitories and were razed by December 1944.
- Buildings T-12, T-23 – Utilized as commissaries and were moved to Administration Area by December 1944.
- Building T-20 – Utilized as a stock room to store tools and hardware.
- Buildings T-3901, T-4703, and T-4705 – Utilized for roads and grounds maintenance activities and were demolished after 1971.
- Drainage ditches.

- Former tennis courts.
- Former skating pond.
- Former baseball diamonds.

Table 2-1 presents a summary of potential sources of contamination at Atlas Scrap Yard. This table identifies potential sources, previous uses, if there were documented releases to the environment, and potential contaminants associated with the previous use. Some of the potential contaminants are documented; however, some professional judgement was made to determine which contaminants may be products of the historical uses. The Characterization of 14 AOCs report indicated that tar cleaning operations took place at Atlas Scrap Yard. However, historical research was unable to identify if and where these activities actually took place. These activities were noted to be associated with Building T-19 – Fire Station; however, it is assumed that these activities were general vehicle cleaning activities.

Contamination at Atlas Scrap Yard in the co-located sewers and munitions response site (MRS) are discussed in Sections 2.4.1 and 2.4.3, respectively. Former underground storage tanks (USTs) associated with Atlas Scrap Yard have been investigated as part of CC-RVAAP-72 Facility-wide USTs under the compliance restoration program (CRP), as discussed in Section 2.4.4.1. Locations of former coal piles are addressed under the CC-RVAAP-73 Facility-wide Coal Storage under the CRP, as discussed in Section 2.4.4.2.

2.2.3 Building Demolition

All World War II construction camp buildings, except for Buildings T-14, T-16, T-18, T-19, and the Incinerator Building, were recorded as having been demolished or relocated by 1945. Buildings T-2, T-4, T-5, T-12, and T-20 were directly relocated to the Administration Area. Material from demolished buildings was salvaged for use in maintenance building construction (Buildings T-3901, T-4703, T-4704, and T-4705). The brick structure associated with the former incinerator is still present, but other components associated with the incinerator have been razed. All water, sanitary, and storm sewer branches for the Construction Camp were plugged and abandoned in place where the buildings were removed.

The remaining eight maintenance buildings (Buildings T-14, T-16, T-18, T-19, T-3901, T-4703, T-4704, and T-4705) were demolished sometime after 1971. There is no formal demolition record documenting the date the buildings were razed or of site and grading changes. The building materials were likely disposed or recycled offsite rather than reused elsewhere at RVAAP. Information is not available whether abatement of asbestos and potentially lead-based paint was performed prior to demolishing all buildings. Three demolition debris piles were located in the south-central portion of the AOC (e2M 2008); however, it is unknown whether the debris was from the demolition of the maintenance buildings. The former Building T-3901 slab is still present.

Five USTs and one above ground storage tank (AST) were present at Atlas Scrap Yard. The fuel oil underground storage tank (UST) (RV-52) located at former Building T-18 remained and was used for storage purposes until 1987. This UST was removed in February 1990 (USACE 2011). The removal

dates are unknown for the four USTs (CC-RVAAP-72-02 through CC-RVAAP-72-05) at the northern Service Station #1 (Building T-22). The former AST at the former southern Service Station #2 (Building T-15) was likely salvaged during demolition prior to December 1944.

2.2.4 AOC Boundary

The AOC boundary for Atlas Scrap Yard is presented in Figure 2-1. The AOC is bound by Newton Falls Road to the north and Paris-Windham Road to the east. The AOC boundary includes the former incinerator to the south and most of the dormitories to the west. Effectively, the AOC boundary includes all large incremental sampling method (ISM) samples approved in the PBA08 Sampling and Analysis Plan (SAP) and sampled in April 2010.

The AOC boundary encompasses the ASA and IA. The ASA consists of approximately 14.9 acres and is located in the north central portion of the AOC. The ASA has historically and is currently used for stockpiling a variety of salvaged inert materials, including railroad ties and concrete and brick. The ASA contains staging areas, multiple access roads, and parking areas made up of slag and asphalt gravel, and is currently the location of staged railroad ties and telephone poles. The IA is 57.6 acres and is generally not actively utilized for storage.

Atlas Scrap Yard is west of Load Line 12, which is immediately east of Paris-Windham Road. One co-located set of sediment and surface water samples (LL12sd-308 and LL12sw-308) were collected in the ditch east of Atlas Scrap Yard and Paris-Windham Road under the PBA08 RI for Load Line 12. These sediment and surface water samples were incorporated into the Atlas Scrap Yard evaluation to represent the potential exit point for runoff or surface drainage from the AOC. The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) also discuss these samples.

2.3 POTENTIAL RECEPTORS AT ATLAS SCRAP YARD

The following sections discuss potential representative human and ecological receptors at Atlas Scrap Yard.

2.3.1 Human Receptors

Camp Ravenna is a controlled-access facility. Atlas Scrap Yard is located in the southeastern portion of the facility and is not currently used for training. However, the north-central portion of the AOC is used for storage of railroad ties and salvaged inert materials. In February 2014, the U.S. Army and Ohio EPA amended the risk assessment process to address changes in the RVAAP restoration program. The *Final Technical Memorandum: Land Uses and Revised Risk Assessment Process for the RVAAP Installation Restoration Program* (ARNG 2014) (herein referred to as the Technical Memorandum) identified three Categorical Land Uses and Representative Receptors to be considered during the RI phase of the CERCLA process.

These three Land Uses and Representative Receptors are presented below.

1. Unrestricted (Residential) Land Use – Resident Receptor (Adult and Child) (formerly called Resident Farmer)
2. Military Training Land Use – National Guard Trainee
3. Commercial/Industrial Land Use – Industrial Receptor (USEPA Composite Worker)

Unrestricted (Residential) Land Use is considered protective for all three Land Uses at Camp Ravenna. Therefore, if an AOC meets the requirements for Unrestricted (Residential) Land Use, then the AOC is also considered to have met the requirements of the other Land Uses (i.e., Industrial and Military Training), and the other Land Uses do not require evaluation.

2.3.2 Ecological Receptors

Camp Ravenna has a diverse range of vegetation and habitat resources. Habitats present within the facility include large tracts of closed-canopy hardwood forest, scrub/shrub open areas, grasslands, wetlands, open-water ponds and lakes, and semi-improved administration areas.

An abundance of wildlife is present on the facility; 35 species of land mammals, 214 species of birds, 41 species of fish, and 34 species of amphibians and reptiles have been identified. The northern long-eared bat (*Myotis septentrionalis*; federally threatened) exists at Camp Ravenna. There are no other federally listed species and no critical habitat occurs (OHARNG 2014). Ohio state-listed plant and animal species have been identified through confirmed sightings and/or biological inventories at the facility and are presented in Table 2-2.

The interior of Atlas Scrap Yard is currently vegetated with shrub/scrub vegetation in unpaved areas and is forested around its perimeter. The north-central portion (ASA) of Atlas Scrap Yard is sparsely vegetated due to extensive gravel/slag cover and mulch-like material. Atlas Scrap Yard also contains a number of seasonal wetlands. Additional information specific to ecological resources at Atlas Scrap Yard is included in Section 7.3.

2.4 CO-LOCATED OR PROXIMATE SITES

The following subsections summarize sites that are co-located or proximate to Atlas Scrap Yard but are addressed under a different program.

2.4.1 Facility-wide Sewers

The sewers within the perimeter of Atlas Scrap Yard are being investigated and assessed as part of the Facility-wide Sewers AOC (RVAAP-67). Storm sewers are not present at Atlas Scrap Yard, and sanitary sewer sediment, pipe bedding material, and sewer water were evaluated as currently summarized in the *Draft Remedial Investigation/Feasibility Study Report for RVAAP-67 Facility-wide Sewers* (USACE 2012). The sanitary sewers in the Atlas Scrap Yard functional area (FA) are part of the Sand Creek Sewage Treatment Plant Network. While cracks and joint separations within

the sanitary sewer system are observed due to the advanced age of the system, the pipes are generally intact, which limits vertical migration from sewer sediment to the exterior of the piping system.

Samples of the sewer sediment and water were collected in 2004 and 2005 as part of the Characterization of 14 AOCs (MKM 2007) and in 2009 and 2010 as part of the Facility-wide Sewers RI (USACE 2012d). Pipe bedding material was also sampled in 2010 as part of the Facility-wide Sewers RI. The compiled data provided effective characterization of the nature and extent of the contamination at the Atlas Scrap Yard FA, and no further sampling was recommended. All SRCs found in the subsurface sewer media samples within Atlas Scrap Yard FA, and evaluated through the stepwise fate and transport screening evaluation, were eliminated as posing future impacts to groundwater.

The HHRA did not identify COCs at Atlas Scrap Yard FA for the National Guard Trainee or Resident Receptor. Since the Atlas Scrap Yard FA has no sewer outfalls, NFA was recommended from an ecological perspective. The Facility-wide Sewers RI predated the Technical Memorandum that specified evaluation of a Commercial/Industrial Land Use; however, the Atlas Scrap Yard FA was determined to be protective for Unrestricted (Residential) Land Use. Therefore, an evaluation of Commercial/Industrial Land Use would not be required. In summary, NFA is recommended for the Atlas Scrap Yard FA sanitary sewers.

2.4.2 Facility-wide Groundwater

As part of the IRP, the U.S. Army implements the Facility-wide Groundwater Monitoring Program (FWGWMP) in accordance with previous agreements made with Ohio EPA. The FWGWMP was initiated in 2005, and involves quarterly sampling of selected wells within the former RVAAP.

Between 2009 and 2011, five different sampling events under the FWGWMP collected groundwater data at Atlas Scrap Yard. During these sampling events, various inorganic chemicals were detected and the limited detections of volatile organic compounds (VOCs), pesticides, polychlorinated biphenyls (PCBs), and explosives were all at estimated concentrations below the laboratory reporting limits. Two samples had SVOC detections (benzoic acid and phenol) above the laboratory reporting limits.

Facility-wide Groundwater is currently at the RI phase of the CERCLA process. Any identified groundwater contamination at Atlas Scrap Yard will be addressed, presented to the public, and have a remedial decision memorialized in a ROD as part of that AOC.

2.4.3 Munitions Response Sites

The MRS within the Atlas Scrap Yard boundary is being investigated under the Military Munitions Response Program (MMRP) and is currently summarized in the RI Report for RVAAP-050-R-01 Atlas Scrap Yard MRS (CB&I 2014).

The RI field activities and supplemental assessments determined that:

1. The nature and extent of munitions and explosives of concern (MEC) and munitions debris (MD) has been adequately defined at the MRS;
2. No physical evidence of MEC or MD was identified during the RI field activities and an explosive safety hazard is not anticipated to exist at the MRS; and
3. Munitions constituents sampling was not warranted since no MEC or MD were found at the MRS during the RI field activities.

The report recommends NFA for the Atlas Scrap Yard MRS under the MMRP.

2.4.4 Compliance Restoration Sites

Atlas Scrap Yard contained two potential sites evaluated under the Compliance Restoration sites evaluated in support of the IRP. The two potential sites include CC-RVAAP-72 Facility-wide USTs and CC-RVAAP-73 Facility-wide Coal Storage and are described, as applicable to Atlas Scrap Yard, in the following sections.

2.4.4.1 Facility-wide Underground Storage Tanks

According to the Historical Records Review Report (USACE 2011), five USTs were documented as having been located within Atlas Scrap Yard. Four of the USTs (RV-52, CC-RVAAP-72-02, CC-RVAAP-72-03, CC-RVAAP-72-04) were 1,000 gal and were used to store No. 2 Fuel Oil and leaded gasoline. The fifth UST (CC-RVAAP-72-05) was 2,000 gal and was used to store kerosene. These former USTs are described in Table 2-3.

Documentation was found indicating that UST RV-52 containing No. 2 Fuel Oil was removed in 1990, as documented in a closure report by Cardamone Construction. The soil sample results associated with the tank removal had concentrations below underground storage tank regulation (BUSTR) action levels. A geophysical investigation was conducted in 2004 to determine if the tanks (CC-RVAAP-72-02, CC-RVAAP-72-03, CC-RVAAP-72-04, and CC-RVAAP-72-05) were still present at the site. The summary did not indicate the USTs were present, and no visual evidence was identified during the 2010 property visit conducted as part of the Phase I RI services at the nine AOCs. No records of soil sampling were found during the Historical Records Review Report (USACE 2011) to demonstrate compliance with BUSTR closure sampling requirements.

A site inspection was performed in 2012 and 2013 to determine presence or absence of potential contamination in subsurface soil at a former UST location not previously sampled, as summarized in the *Draft Site Inspection Report CC-RVAAP-72 Facility-wide Underground Storage Tanks* (ECC 2015). As many as six subsurface soil samples were collected from the locations of each former UST up to depths of 13 ft bgs. These samples were analyzed for polycyclic aromatic hydrocarbons (PAHs); benzene, toluene, ethylbenzene, and xylene (BTEX) with methyl tertiary butyl ether (MTBE), total petroleum hydrocarbons (TPH) gasoline range organics (GRO), TPH diesel range organics (DRO), and target analyte list (TAL) Metals.

Sample results were less than BUSTR Soil Action Levels Class 1. The results of this site investigation (SI) indicate that the subsurface soil is not contaminated; therefore, soil is not a source of groundwater contamination at CC-RVAAP-72 Facility-wide USTs. The groundwater associated with CC-RVAAP-72 Facility-wide USTs is being evaluated under RVAAP-66, Facility-wide Groundwater. The conclusion of the SI states: "The results of this SI indicate that NFA is warranted for soil at the CC RVAAP-72 Facility-wide USTs."

2.4.4.2 Facility-Wide Coal Storage

The Historical Records Review Report (USACE 2011) indicated that small quantity coal piles are visible in an undated aerial photograph (circa early- to mid-1940s) in association with boiler houses attached to large office buildings and dormitories. Potential coal piles are also visible at the northern "Active Area" in a 1952 aerial photograph showing the site.

No visual evidence of coal or coal residue was observed during the property visit conducted as part of the Phase I RI services. The Historical Records Review Report (USACE 2011) recommended NFA at the site since soil was to be addressed under a separate CERCLA action. This RI Report does a thorough evaluation of the potential contaminants (metals and SVOCs) in surface soil that may have resulted from coal storage activities.

2.5 POTENTIAL SITE-RELATED RELEASES

As presented in Table 2-1, there have been no documented site-related releases at Atlas Scrap Yard. Table 2-1 presents potential contaminants that may be present in Atlas Scrap Yard media from previous use of the site.

Table 2-1. Potential Source Area Description and Potential Impacts

Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
Building T-6 – Materials Testing Laboratory	Utilized as a materials testing laboratory during World War II. T-6 was razed by December 1944.	None	Metals, explosives
Building T-13 – Workmen's Sheds	Utilized as Workmen's Sheds during World War II. T-13 was razed by December 1944.	None	Unknown
Building T-14 – Garage	Utilized as a garage for vehicle storage and potentially for maintenance. After 1944, T-14 was used for roads and ground equipment storage. T-14 was demolished sometime after 1971.	None	Petroleum, solvents
Building T-15 - Service Station #2	Utilized as the southern service station containing an AST that has since been removed. However, information regarding capacity and use was not identified. T-15 was razed by December 1944.	None	Petroleum, lead
Building T-16 – Blacksmith Shop	Utilized as a Blacksmith Shop during World War II. T-16 remained at Atlas Scrap Yard after the 1944 construction camp demolition and was used for roads and ground equipment storage. T-16 was demolished sometime after 1971.	None	Metals
Building T-18 – Office Building	Utilized as an office building by the Atlas Powder Company (Operating Contractor). T-18 remained at Atlas Scrap Yard after the 1944 construction camp demolition and was used for roads and ground equipment storage. A 1000-gal No. 2 fuel oil UST (RV-52) was installed on the western side of T-18 in 1941 and removed in 1990. T-18 was demolished in the 1960s, but UST remained and was used for storage purposes until 1987 (USACE 2011).	None	Petroleum, lead
Building T-19 – Fire Station	Utilized as a fire station during WWII. T-19 remained at Atlas Scrap Yard after the 1944 demolition and was used for roads and ground equipment storage. T-19 was demolished sometime after 1971.	None	Carbon tetrachloride
Building T-22 - Service Station #1	Utilized as service station containing four former USTs. T-22 was razed by December 1944 and the materials were salvaged for maintenance building construction.	None	Petroleum, lead (Petroleum assessed in Facility-wide UST investigation, see Section 2.4.4.1)
Building T-25 – Tool Grease Rack	Utilized for vehicle maintenance and contained a truck greasing rack. T-25 was razed by December 1944.	None	Petroleum
Building T-4704 – Roads and Grounds Maintenance Building	Initial use as roads and grounds maintenance building. A 1956 figure (Plot Plan Roads and Grounds Maintenance Area) identifies this building as "Electrical Transmission Salv. Mat'l."	None	PCBs

Table 2–1. Potential Source Area Description and Potential Impacts (continued)

Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
Concrete Rubble	After the Vietnam War (1975), the north-central portion of Atlas Scrap Yard (i.e., ASA) has been exclusively utilized as a stockpile storage area, including concrete footers/rubble.	None	Metals, PAHs
Former Incinerator	Utilized as an incinerator at the construction camp. The brick structure associated with the incinerator is still present, but other components associated with the incinerator have been razed.	None documented. However, use as incinerator may have resulted in a release.	Metals
Former Staging Area of 90mm Wooden Packing Boxes	Staging area for salvaged ammunition boxes from demilitarized Vietnam War munitions. Two parallel lines of 90mm packing boxes were identified in this area.	None	Explosives
Reinforced Concrete Culvert (RCC) Pipes	Former staging area for RCC pipes, most likely from infrastructure demolition.	None	Metals
Railroad Ballast	East-central portion of AOC utilized as a portion of a parking area and was subsequently used to store railroad ballast.	None	Metals, PAHs
Railroad Ballast	North-central portion of AOC utilized as a portion of a former parking area and was subsequently used to store railroad ballast.	None	Metals, PAHs
Railroad Ties	After the Vietnam War (1975), the north-central portion of Atlas Scrap Yard (i.e., ASA) became exclusively utilized as a stockpile storage area, including railroad ties.	None	Metals, PAHs
Water Tower	Elevated water tower (100,000 gal) utilized by the construction camp, Load Line 12 (Ammonium Nitrate Plant), and Load Line 4 during WWII, and continued use for roads and grounds buildings. Water tower was demolished between 1994 and 2004.	None	Metals

AOC = Area of Concern.
ASA = Active storage area.
AST = Aboveground storage tank.
gal = Gallon.
mm = Millimeter.
PCB = Polychlorinated biphenyl.
UST = Underground storage tank.

Table 2-2. Federal and State-listed Species List

CAMP RAVENNA JOINT MILITARY TRAINING CENTER RARE SPECIES LIST
December 2014

I. Species confirmed to be on Camp Ravenna property by biological inventories and confirmed sightings.

A. Federal Threatened

1. Northern long-eared bat, *Myotis septentrionalis*

B. State Endangered

1. American bittern, *Botaurus lentiginosus* (migrant)
2. Northern harrier, *Circus cyaneus*
3. Sandhill Crane, *Grus Canadensis* (probable nester)
4. Black bear, *Ursus americanus*
5. Mountain Brook Lamprey, *Ichthyomyzon greeleyi*
6. Brush-tipped emerald, *Somatochlora walshii*
7. Graceful Underwing, *Catocala gracilis*
8. Tufted Moisture-loving Moss, *Philonotis Fontana var. caespitosa*
9. Appalachian quillwort, *Isoetes engelmannii*
10. Handsome sedge, *Carex formosa*
11. Narrow-necked Pohl's Moss, *Pohlia elongata var. elongate*
12. Philadelphia panic-grass, *Panicum philadelphicum*
13. Variegated scouring-rush, *Equisetum variegatum*

C. State Threatened

1. Barn owl, *Tyto alba*
2. Least bittern, *Ixobrychus exilis*
3. Trumpeter swan, *Cygnus buccinators* (migrant)
4. Bobcat, *Felis rufus*
5. Caddis fly, *Psilotreta indecisa*
6. Hobblebush, *Viburnum alnifolium*
7. Simple willow-herb, *Epilobium strictum*
8. Lurking leskea, *Plagiothecium latebricola*
9. Strict blue-eyed grass, *Sisyrinchium montanum*

D. State Potentially Threatened Plants

1.Arborvitae, *Thuja occidentalis*
2. False hop sedge, *Carex lupiliformis*
3. Greenwhite sedge, *Carex albolutescens*
4. Long Beech Fern, *Phegopteris connectilis (Thelypteris phegopteris)*
5. Pale sedge, *Carex pallescens*
6. Sharp-glumed manna-grass, *Glyceria acutifolia*
7. Straw sedge, *Carex straminea*
8. Water avens, *Geum rivale*
9. Woodland Horsetail, *Equisetum sylvaticum*
10. Shining ladies'-tresses, *Spiranthes lucida*

E. State Species of Concern

1. Big brown bat, *Eptesicus fuscus*
2. Deer mouse, *Peromyscus maniculatus*
3. Eastern red bat, *Lasiurus borealis*
4. Hoary bat, *Lasiurus cinereus*
5. Little brown bat, *Myotis lucifugus*
6. Northern long-eared bat, *Myotis septentrionalis*
7. Pygmy shrew, *Sorex hovi*
8. Southern bog lemming, *Svnaptomys cooperi*
9. Star-nosed mole, *Condylura cristata*
10. Tri-colored bat, *Perimyotis subflavus*
11. Woodland jumping mouse, *Napaeozapus insignis*
12. Sharp-shinned hawk, *Accipiter striatus*
13. Marsh wren, *Cistothorus palustris*
14. Henslow's sparrow, *Ammodramus henslowii*
15. Cerulean warbler, *Dendroica cerulean*
16. Prothonotary warbler, *Protonotaria citrea*
17. Bobolink, *Dolichonyx oryzivorus*
18. Northern bobwhite, *Colinus virginianus*
19. Common moorhen, *Gallinula chloropus*
20. Great egret, *Ardea alba* (migrant)
21. Sora, *Porzana carolina*
22. Virginia Rail, *Rallus limicola*
23. Yellow-bellied Sapsucker, *Sphyrapicus varius*
24. Creek heelsplitter, *Lasmigona compressa*
25. Eastern box turtle, *Terrapene carolina*
26. Four-toed Salamander, *Hemidacrylium scutatum*
27. Eastern garter snake, *Thamnophis sirtalis*
28. Smooth green snake, *Opheodrys vernalis*
29. Eastern sand darter, *Ammocrypta pellucida*
30. Stenonema ithica (mayfly)
31. *Apamea mixta* (moth)
32. *Brachylomia algens* (moth)
33. Scurfy quaker, *Homorthodes furfurata*
34. Sedge wren, *Cistothorus platensis*

Table 2–2. Federal and State-listed Species List (continued)

CAMP RAVENNA JOINT MILITARY TRAINING CENTER RARE SPECIES LIST
December 2014

F. State Special Interest


1. American black duck, *Anas rubripes*
2. Canada warbler, *Wilsonia Canadensis*
3. Dark-eyed junco, *Junco hyemalis* (migrant)
4. Hermit thrush, *Catharus guttatus* (migrant)
5. Least flycatcher, *Empidonax minimus*
6. Magnolia warbler, *Dendroica magnolia*
7. Northern waterthrush, *Seiurus noveboracensis*
8. Winter wren, *Troglodytes troglodytes*
9. Back-throated blue warbler, Dendroica caerulescens
10. Brown creeper, Certhia Americana
11. Mourning warbler, *Oporornis Philadelphia*
12. Pine siskit, *Carduelis pinus*
13. Purple finch, *Carpodacus purpureus*
14. Red-breasted nuthatch, *Sitta Canadensis*
15. Golden-crowned kinglet, *Regulus satrapa*
16. Blackburnian warbler, *Dendroica fusca*
17. Gadwall, *Anas strepera*
18. Green-winged teal, *Anas crecca*
19. Northern shoveler, *Anas clypeata*
20. Redhead duck, *Aytya Americana*
21. Ruddy duck, *Oxyura jamaicensis*
22. Wilson's snipe, *Gallinago delicata*
23. Subflava sedge borer, *Capsula subflava*

Table 2-3. Summary of Former Underground Storage Tanks at Atlas Scrap Yard

Former UST	Location/Building	Size (gal)	Contents/Purpose
RV-52	Building T-18	1,000	No. 2 Fuel Oil
CC-RVAAP-72-02	Service Station #1 (near Building T-22)	1,000	Leaded Gasoline
CC-RVAAP-72-03	Service Station #1 (near Building T-22)	1,000	Leaded Gasoline
CC-RVAAP-72-04	Service Station #1 (near Building T-22)	1,000	Fuel Oil
CC-RVAAP-72-05	Service Station #1 (near Building T-22)	2,000	Kerosene

Note: the Draft SI Report (Table 7-1) indicates former USTs 72-03, 72-04, and 72-05 are near former Building T-15. However, it appears these old USTs were near former Building T-22, which would be the Northern Service Station.
Gal = Gallons.
UST = Underground storage tank.

THIS PAGE INTENTIONALLY LEFT BLANK

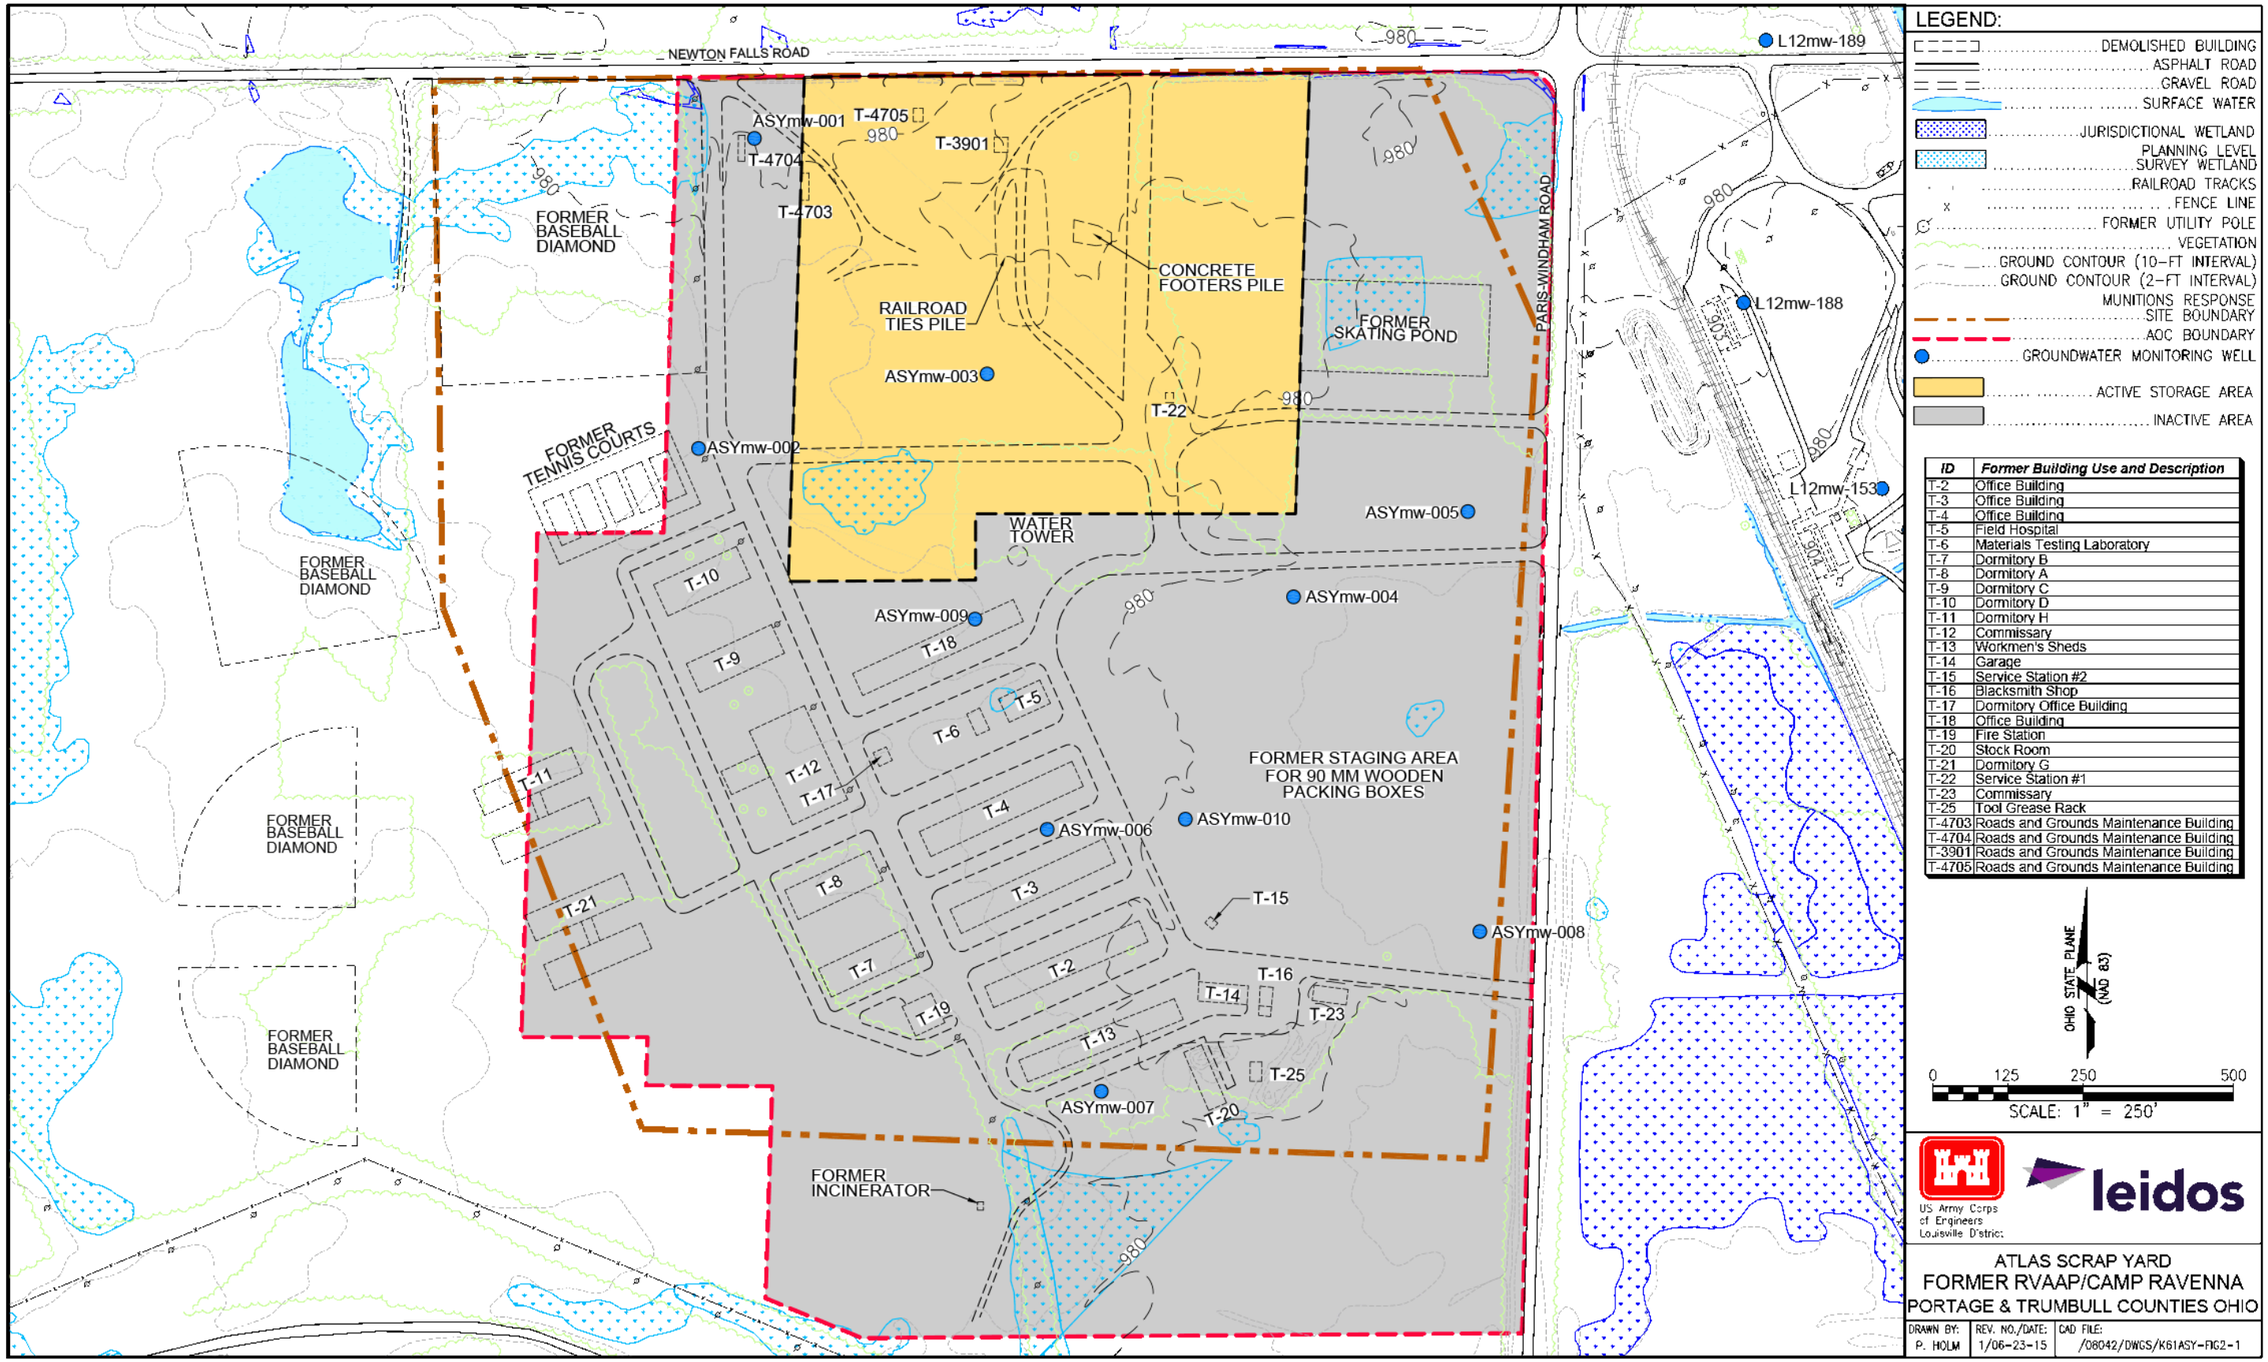

ID	Former Building Use and Description
T-2	Office Building
T-3	Office Building
T-4	Office Building
T-5	Field Hospital
T-6	Materials Testing Laboratory
T-7	Dormitory B
T-8	Dormitory A
T-9	Dormitory C
T-10	Dormitory D
T-11	Dormitory H
T-12	Commissary
T-13	Workmen's Sheds
T-14	Garage
T-15	Service Station #2
T-16	Blacksmith Shop
T-17	Dormitory Office Building
T-18	Office Building
T-19	Fire Station
T-20	Stock Room
T-21	Dormitory G
T-22	Service Station #1
T-23	Commissary
T-25	Tool Grease Rack
T-4703	Roads and Grounds Maintenance Building
T-4704	Roads and Grounds Maintenance Building
T-3901	Roads and Grounds Maintenance Building
T-4705	Roads and Grounds Maintenance Building

Figure 2–1. Site Features

THIS PAGE INTENTIONALLY LEFT BLANK.

3.0 ENVIRONMENTAL SETTING

This section describes the physical features, topography, geology, hydrogeology, and environmental characteristics of Camp Ravenna and Atlas Scrap Yard that are factors in identifying the potential contaminant transport pathways, receptor populations, and exposure scenarios to evaluate human health and ecological risks. This section also presents a preliminary conceptual site model (CSM) based on Atlas Scrap Yard characteristics and historical investigation data to provide a framework to evaluate contaminant nature and extent, fate and transport, and human health and ecological risk. An updated CSM is presented in Section 8.0 to integrate the results of evaluations performed in this report.

3.1 CAMP RAVENNA PHYSIOGRAPHIC SETTING

Camp Ravenna is located within the Southern New York Section of the Appalachian Plateaus physiographic province (USGS 1968). This province is characterized by elevated uplands underlain primarily by Mississippian and Pennsylvanian age bedrock units that are horizontal or gently dipping. The province is characterized by its rolling topography, with incised streams having dendritic drainage patterns. The Southern New York Section has been modified by glaciation, which has rounded ridges, filled major valleys, and blanketed many areas with glacially-derived unconsolidated deposits (e.g., sand, gravel, and finer-grained outwash deposits). As a result of glacial activity in this section, old stream drainage patterns were disrupted in many locales, and extensive wetland areas have developed.

3.2 SURFACE FEATURES AND AOC TOPOGRAPHY

The topography of Camp Ravenna is gently undulating with an overall decrease in ground elevation from a topographic high of approximately 1,220 ft above mean sea level (amsl) in the far western portion of the facility to low areas at approximately 930 ft amsl in the far eastern portion of the facility. USACE mapped the facility topography in February 1998 using a 2 ft (60.1 cm) contour interval with an accuracy of 0.02 ft (0.61 cm). USACE based the topographic information on aerial photographs taken during the spring of 1997. This USACE survey is the basis for the topographical information illustrated in figures found in this report.

Atlas Scrap Yard is a 73-acre AOC located southwest of the intersection of Newton Falls Road and Paris-Windham Road, north of Load Line 4, in the southeast portion of Camp Ravenna (Figure 1-2). All buildings and structures have been demolished with the exception of the brick structure associated with the former incinerator and the slab for former Building T-3901. There was no available documentation of fill or soil brought onto Atlas Scrap Yard during building demolition. Remaining features at Atlas Scrap Yard include several one-lane gravel/slag access roads that enter the AOC from the north and east (Figure 2-1) and a variety of salvaged inert materials, including railroad ties, concrete, and brick. Small construction drainage ditches border the access roads and are also located throughout the AOC.

Topographic relief at the AOC is low, with a topographic high in the northwestern portion of the AOC that slopes downward to the topographic low in the central-eastern boundary of the AOC. Ground elevations within Atlas Scrap Yard range from approximately 976–986 ft amsl (Figure 3-1). Surface water follows topographic relief and drains into roadside ditches along the eastern portion of the AOC.

3.3 SOIL AND GEOLOGY

3.3.1 Regional Geology

The regional geology at Camp Ravenna consists of horizontal to gently dipping bedrock strata of Mississippian and Pennsylvanian age overlain by varying thicknesses of unconsolidated glacial deposits. The bedrock and unconsolidated geology at Camp Ravenna and geology specific to Atlas Scrap Yard are presented in the following subsections.

3.3.2 Soil and Glacial Deposits

Bedrock at Camp Ravenna is overlain by deposits of the Wisconsin-aged Lavery Till in the western portion of the facility and the younger Hiram Till and associated outwash deposits in the eastern portion. Unconsolidated glacial deposits vary considerably in their character and thickness across Camp Ravenna, from zero in some of the eastern portions of the facility to an estimated 150 ft (46 m) in the south-central portion (Figure 3-2).

Thin coverings of glacial material have been completely removed as a consequence of human activities at locations such as Ramsdell Quarry. Bedrock is present at or near the ground surface in many locations, such as at Load Line 1 and the Erie Burning Grounds (USACE 2001a). Where this glacial material is still present, its distribution and character indicate its origin is ground moraine. These tills consist of laterally discontinuous assemblages of yellow-brown, brown, and gray silty clays to clayey silts, with sand and rock fragments. Lacustrine sediment from bodies of glacial-age standing water has also been encountered in the form of deposits of uniform light gray silt greater than 50-ft thick in some areas (USACE 2001a).

Soil at Camp Ravenna is generally derived from the Wisconsin-age silty clay glacial till. Distributions of soil types are discussed and mapped in the *Soil Survey of Portage County, Ohio* (USDA 1978). Much of the native soil at Camp Ravenna was disturbed during construction activities in former production and operational areas of the facility.

The Sharon Member of the Pennsylvanian Pottsville Formation is the primary bedrock beneath Camp Ravenna. In the western half of the facility, the upper members of the Pottsville Formation, including the Connoquenessing Sandstone (also known as the Massillon Sandstone), Mercer Shale, and uppermost Homewood Sandstone, have been found. The regional dip of the Pottsville Formation measured in the western portion of Camp Ravenna is between 5–11.5 ft per mile to the south.

3.3.3 Geologic Setting of Atlas Scrap Yard

The bedrock formation underlying the unconsolidated deposits at Atlas Scrap Yard, as inferred from existing geologic data, is the Pennsylvanian age Pottsville Formation, Sharon Sandstone Member (Figure 3-3). When encountered, bedrock was observed at Atlas Scrap Yard at 20–29 ft bgs during monitoring well installation activities as part of the Characterization of 14 AOCs. The sandstone unit of the Sharon member (informally referred to as the Sharon Conglomerate) is a highly porous, loosely cemented, permeable, cross-bedded, frequently fractured and weathered orthoquartzite sandstone, which is locally conglomeritic. The Sharon Conglomerate exhibits locally occurring thin shale lenses in the upper portion of the unit. Upper members of the Pottsville Formation are not present at the AOC. Bedrock was not encountered in any of the 21 soil or geotechnical borings installed to a maximum depth of 13 ft bgs during the PBA08 RI (Appendix A).

Atlas Scrap Yard is located within Hiram Till glacial deposits. The two soil types observed at the AOC are the Mahoning silt loam (2–6% slopes) and the Trumbull silt loam (0–2% slopes). Mahoning silt loam is a gently sloping, poorly drained soil formed in silty clay loam or clay loam glacial till, generally where bedrock is greater than 6 ft bgs. The Mahoning silt loam has low permeability, with rapid runoff and seasonal wetness and is present primarily in the central 60% of the AOC (USDA 2010). The Trumbull silt loam covers the remaining 40% of the AOC and is poorly drained soil formed in silty clay till, generally where bedrock is greater than 6 ft bgs. The Trumbull silt loam is typically formed in depressions with a moderate water capacity with groundwater existing near ground surface (USDA 2010).

As observed in PBA08 RI soil borings, the composition of unconsolidated deposits at the AOC generally consist of yellowish-brown to gray, medium dense, silty clay tills with trace gravel, with sand content generally increasing with depth. Groundwater, when encountered, ranged from 8.45–13 ft bgs within a fine- to medium-grained sand in the PBA08 RI soil borings. PBA08 RI boring logs containing geologic descriptions of unconsolidated deposits at Atlas Scrap Yard are included in Appendix A. Geologic descriptions of subsurface soil samples collected during the PBA08 RI are generally consistent with the conclusions from the Characterization of 14 AOCs. Cross sections of the Atlas Scrap Yard subsurface were created from monitoring well lithology records to illustrate lateral distribution and variation of the discontinuous glacial sediment (MKM 2007).

Geotechnical analyses conducted during the Characterization of 14 AOCs classify samples collected from ASYmw-001 at 4–6 ft bgs, ASYmw-003 at 6–8 ft bgs, and ASYmw-007 at 8–10 ft bgs as brown, lean clay with sand and trace gravel (MKM 2007). Four geotechnical samples were collected from Atlas Scrap Yard during the PBA08 RI. Results are consistent with the Characterization of 14 AOCs. A summary of geotechnical analysis, including porosity, density, and moisture content, is presented in Section 5.4.

3.4 HYDROGEOLOGY

3.4.1 Regional Hydrogeology

Sand and gravel aquifers are present in the buried-valley and outwash deposits in Portage County, as described in the *Phase I Remedial Investigation Report for High-Priority Areas of Concern* (USACE 1998). Generally, these saturated zones are too thin and localized to provide large quantities of water for industrial or public water supplies; however, yields are sufficient for residential water supplies. Lateral continuity of these aquifers is unknown. Recharge of these units is derived from surface water infiltration of precipitation and surface streams. Specific groundwater recharge and discharge areas at Camp Ravenna have not been delineated.

The thickness of the unconsolidated interval at Camp Ravenna ranges from thin to absent in the eastern and northeastern portion of Camp Ravenna to an estimated 150 ft in the central portion of the facility. The groundwater table occurs within the unconsolidated zone in many areas of the facility. Because of the heterogeneous nature of the unconsolidated glacial material, groundwater flow patterns are difficult to determine with a high degree of accuracy. Vertical recharge from precipitation likely occurs via infiltration along root zones and desiccation cracks and partings within the soil column. Laterally, most groundwater flow likely follows topographic contours and stream drainage patterns, with preferential flow along pathways (e.g., sand seams, channel deposits, or other stratigraphic discontinuities) having higher permeability than surrounding clay or silt-rich material. Figure 3-4 illustrates facility-wide potentiometric surface data in the unconsolidated interval from the January 2010 contemporaneous measurement event (EQM 2010).

Within bedrock units at Camp Ravenna, the principle water-bearing aquifer is the Sharon Sandstone/Conglomerate. Depending on the existence and depth of overburden, the Sharon Sandstone/Conglomerate ranges from an unconfined to a leaky artesian aquifer. Water yields from on-site water supply wells completed in the Sharon Sandstone/Conglomerate ranged from 30–400 gal per minute (gpm) (USATHAMA 1978). Well yields of 5–200 gpm were reported for on-site bedrock wells completed in the Sharon Sandstone/Conglomerate (Kammer 1982). Other local bedrock units capable of producing water include the Homewood Sandstone, which is generally thinner and only capable of well yields less than 10 gpm, and the Connoquenessing Sandstone. Wells completed in the Connoquenessing Sandstone in Portage County have yields ranging from 5–100 gpm but are typically less productive than the Sharon Sandstone/Conglomerate due to lower permeability (Winslow et al. 1966).

Figure 3-5 shows the potentiometric surface within bedrock strata at Camp Ravenna in January 2010 (EQM 2010). The bedrock potentiometric map shows a more uniform and regional eastward flow direction than the unconsolidated zone that is not as affected by local surface topography. Due to the lack of well data in the western portion of Camp Ravenna, general flow patterns are difficult to discern. For much of the eastern half of Camp Ravenna, bedrock potentiometric elevations are higher than the overlying unconsolidated potentiometric elevations, indicating an upward hydraulic gradient. This evidence suggests there is a confining layer that separates the two aquifers. In the far eastern

area, the two potentiometric surfaces are at approximately the same elevation, suggesting that hydraulic communication between the two aquifers is occurring.

3.4.2 Atlas Scrap Yard Hydrologic/Hydrogeologic Setting

A total of 10 groundwater monitoring wells were installed at Atlas Scrap Yard during the Characterization of 14 AOCs. Initial depths to groundwater encountered during well installation varied from 11.7 ft bgs in ASYmw-002 to 18 ft bgs in ASYmw-001. All monitoring wells are currently sampled under the FWGWMP. Monitoring wells ASYmw-007, ASYmw-008, and ASYmw-010 are screened in unconsolidated zone groundwater, while ASYmw-001 through ASYmw-006 and ASYmw-009 are screened in the Sharon Sandstone.

The potentiometric surface at the AOC is shown on Figure 3-1. The estimated groundwater flow directions reflect the January 2010 facility-wide potentiometric data presented in the *Facility-Wide Groundwater Monitoring Program Report on the January 2010 Sampling Event* (EQM 2010). Water level elevations at the AOC had a range of 967.54–973.63 ft amsl. Available historical data does not show large seasonal fluctuation changes in the general groundwater flow direction. The local potentiometric surface within Atlas Scrap Yard shows the groundwater flow pattern to the west. Facility-wide potentiometric data (Figures 3-4 and 3-5) indicate flow is generally to the south-southeast (unconsolidated zone) and southwest (bedrock zone). The average horizontal hydraulic gradient for the unconsolidated zone is approximately 0.0046 ft/ft.

Results of slug tests performed at the 10 groundwater monitoring wells during the Characterization of 14 AOCs indicate an average hydraulic conductivity of 3.89E-04 cm/s (MKM 2007). Table 3-1 presents the slug test results for each well.

3.4.3 Surface Water

3.4.3.1 Regional Surface Water

Camp Ravenna resides within the Mahoning River watershed, which is part of the Ohio River Basin. The west branch of the Mahoning River is the main surface stream in the area that flows adjacent to the west end of the facility, generally in a north to south direction, before flowing into the Michael J. Kirwan Reservoir, located to the south of State Route 5 (Figure 1-1). The west branch of the Mahoning River flows out of the reservoir and parallels the southern Camp Ravenna boundary before joining the Mahoning River east of Camp Ravenna. The western and northern portions of Camp Ravenna display low hills and a dendritic surface drainage pattern. The eastern and southern portions are characterized by an undulating to moderately level surface, with less dissection of the surface drainage. The facility is marked with marshy areas and flowing and intermittent streams whose headwaters are located in the upland areas of the facility.

The three primary watercourses that drain Camp Ravenna are (Figure 1-2):

1. South Fork Eagle Creek;
2. Sand Creek; and
3. Hinkley Creek.

These watercourses have many associated tributaries. Sand Creek has a drainage area of 13.9 square miles (36 km^2) and generally flows in a northeast direction to its confluence with South Fork Eagle Creek. In turn, South Fork Eagle Creek continues in a northerly direction for 2.7 miles (4.3 km) to its confluence with Eagle Creek. The drainage area of South Fork Eagle Creek is 26.2 square miles (67.8 km^2), including the area drained by Sand Creek. Hinkley Creek originates just southeast of the intersection between State Route 88 and State Route 303 to the north of the facility. Hinkley Creek, with a drainage area of 11.0 square miles (28.5 km^2), flows in a southerly direction through the facility and converges with the west branch of the Mahoning River south of the facility (USACE 2001a).

Approximately one-third of Camp Ravenna meets the regulatory definition of a wetland, with the majority of the wetland areas located in the eastern portion of the facility. Wetland areas at Camp Ravenna include seasonal wetlands, wet fields, and forested wetlands. Many of the wetland areas are the result of natural drainage or beaver activity; however, some wetland areas are associated with anthropogenic settling ponds and drainage areas.

Approximately 50 ponds are scattered throughout the facility. Many were constructed within natural drainage ways to function as settling ponds or basins for process effluent and runoff. Others are natural in origin, resulting from glacial action or beaver activity. Stormwater runoff is controlled primarily by natural drainage except in former operations areas where an extensive storm sewer network helps to direct runoff to drainage ditches and settling ponds. In addition, the storm sewer system was one of the primary drainage mechanisms for process effluent while production facilities were operational.

3.4.3.2 Atlas Scrap Yard Surface Water

Surface water drainage generally follows the topography of Atlas Scrap Yard and occurs as intermittent stormwater runoff flowing into natural and constructed drainage ditches or conveyances along Newton Falls Road on the north side of Atlas Scrap Yard and along Paris-Windham Road on the east side of the production area (Figure 3-1). Surface water flowing in ditches or other drainage features is the primary migration pathway for contamination to leave Atlas Scrap Yard. Surface water exits from the eastern portion of Atlas Scrap Yard to Load Line 12. Once in Load Line 12, surface drainage flows north, eventually draining to Cobbs Ponds approximately 1,500 ft northeast of Atlas Scrap Yard. During the PBA08 RI, stagnant surface water was observed in the drainage ditch parallel to Paris-Windham Road. The intermittent stormwater runoff could not drain from this conveyance due to beaver dams obstructing flow downstream.

3.5 CLIMATE

The general climate of Camp Ravenna is continental and characterized by moderately warm and humid summers, reasonably cold and cloudy winters, and wide variations in precipitation from year to year. The climate data presented below for Camp Ravenna were obtained from available National Weather Service records for the 30-year period of record from 1981 to 2010 at the Youngstown Regional Airport, Ohio (http://www.weather.gov/climate/xmacis.php?wfo=cle). Wind speed data for Youngstown, Ohio, are from the National Climatic Data Center for the available 53-year period of record from 1950 through 2002 (http://lwf.ncdc.noaa.gov/oa/climate/online/ccd/avgwind.html).

Average annual rainfall in Camp Ravenna is 38.86 inches, with the highest monthly average occurring in July (4.31 inches) and the lowest monthly average occurring in February (2.15 inches). Average annual snowfall totals approximately 62.9 inches with the highest monthly average occurring in January (17.1 inches). Due to the influence of lake-effect snowfall events associated with Lake Erie (located approximately 35 miles to the northwest of Camp Ravenna), snowfall totals vary widely throughout northeastern Ohio.

The average annual daily temperature in Camp Ravenna is 49.3ºF, with an average monthly high temperature of 70.9ºF in July and an average monthly low temperature of 26.1ºF in January. The highest daily maximum temperature of 100ºF occurred in July 1988, and the record low temperature of -22ºF occurred in January 1994. The prevailing wind direction at Camp Ravenna is from the southwest, with the highest average wind speed occurring in January [11.4 miles per hour (mph)] and the lowest average wind speed occurring in August (7.4 mph). Thunderstorms occur approximately 35 days per year and are most abundant from April through August. Camp Ravenna is susceptible to tornadoes; minor structural damage to several buildings on facility property occurred as the result of a tornado in 1985.

Table 3-1. Hydraulic Conductivities Measured During the Characterization of 14 AOCs

Monitoring Well ID	Screened Interval (ft bgs)	Geologic Material Adjacent to Screen	Hydraulic Conductivity (cm/s)
ASYmw-001	11 – 21	Clayey Silt / Sandstone	5.18E-04
ASYmw-002	9.5 – 19.5	Silty Sand / Sandstone	1.35E-03
ASYmw-003	11 – 21	Clayey Silt / Sandy Silt / Sandstone	7.71E-04
ASYmw-004	17 – 27	Clayey Silt / Sandy Silt / Sandstone	9.41E-05
ASYmw-005	14 – 24	Sandy Silt / Sandstone	1.09E-04
ASYmw-006	16 – 26	Clayey Silt / Sandy Silt / Sandstone	1.07E-04
ASYmw-007	16 – 26	Silty Sand / Sandstone	1.75E-04
ASYmw-008	15 – 25	Clayey Silt / Silty Clay	3.33E-04
ASYmw-009	11.5 – 21.5	Silty Sand / Sandy Silt / Sandstone	1.81E-04
ASYmw-010	17 – 27	Clayey Silt / Silty Sand	2.25E-04

Source: Characterization of 14 AOCs (MKM 2007).
ft bgs = Feet below ground surface.
cm/s = Centimeters per second.
ID = Identification.

THIS PAGE INTENTIONALLY LEFT BLANK.

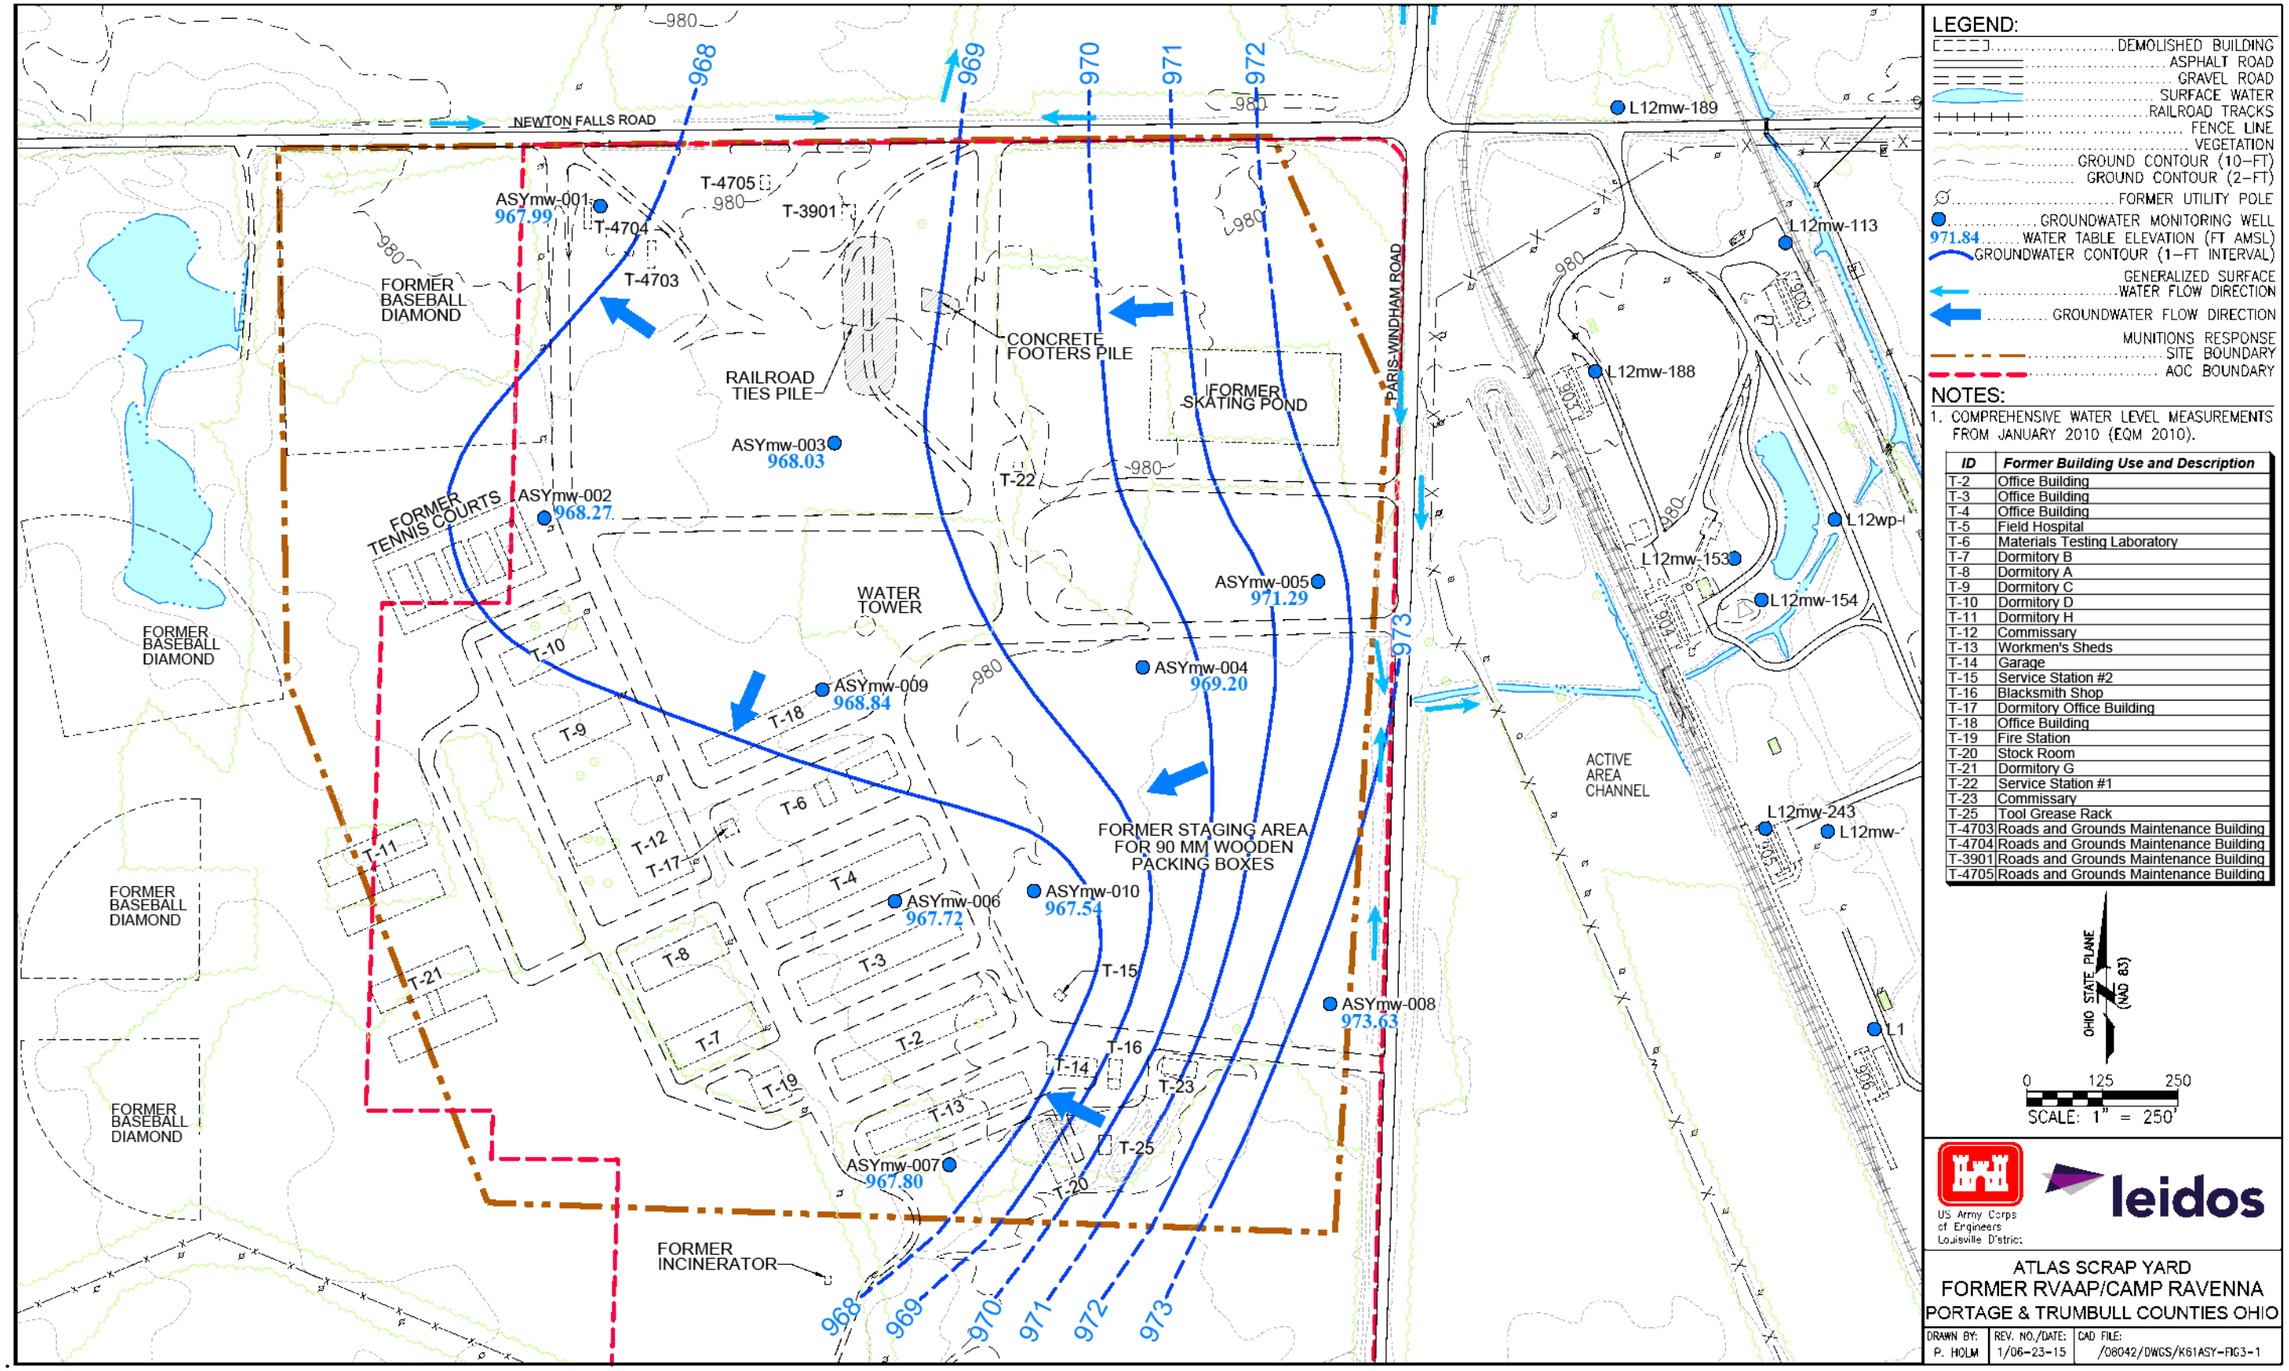


Figure 3–1. Topography, Groundwater Flow, and Surface Water Flow at Atlas Scrap Yard

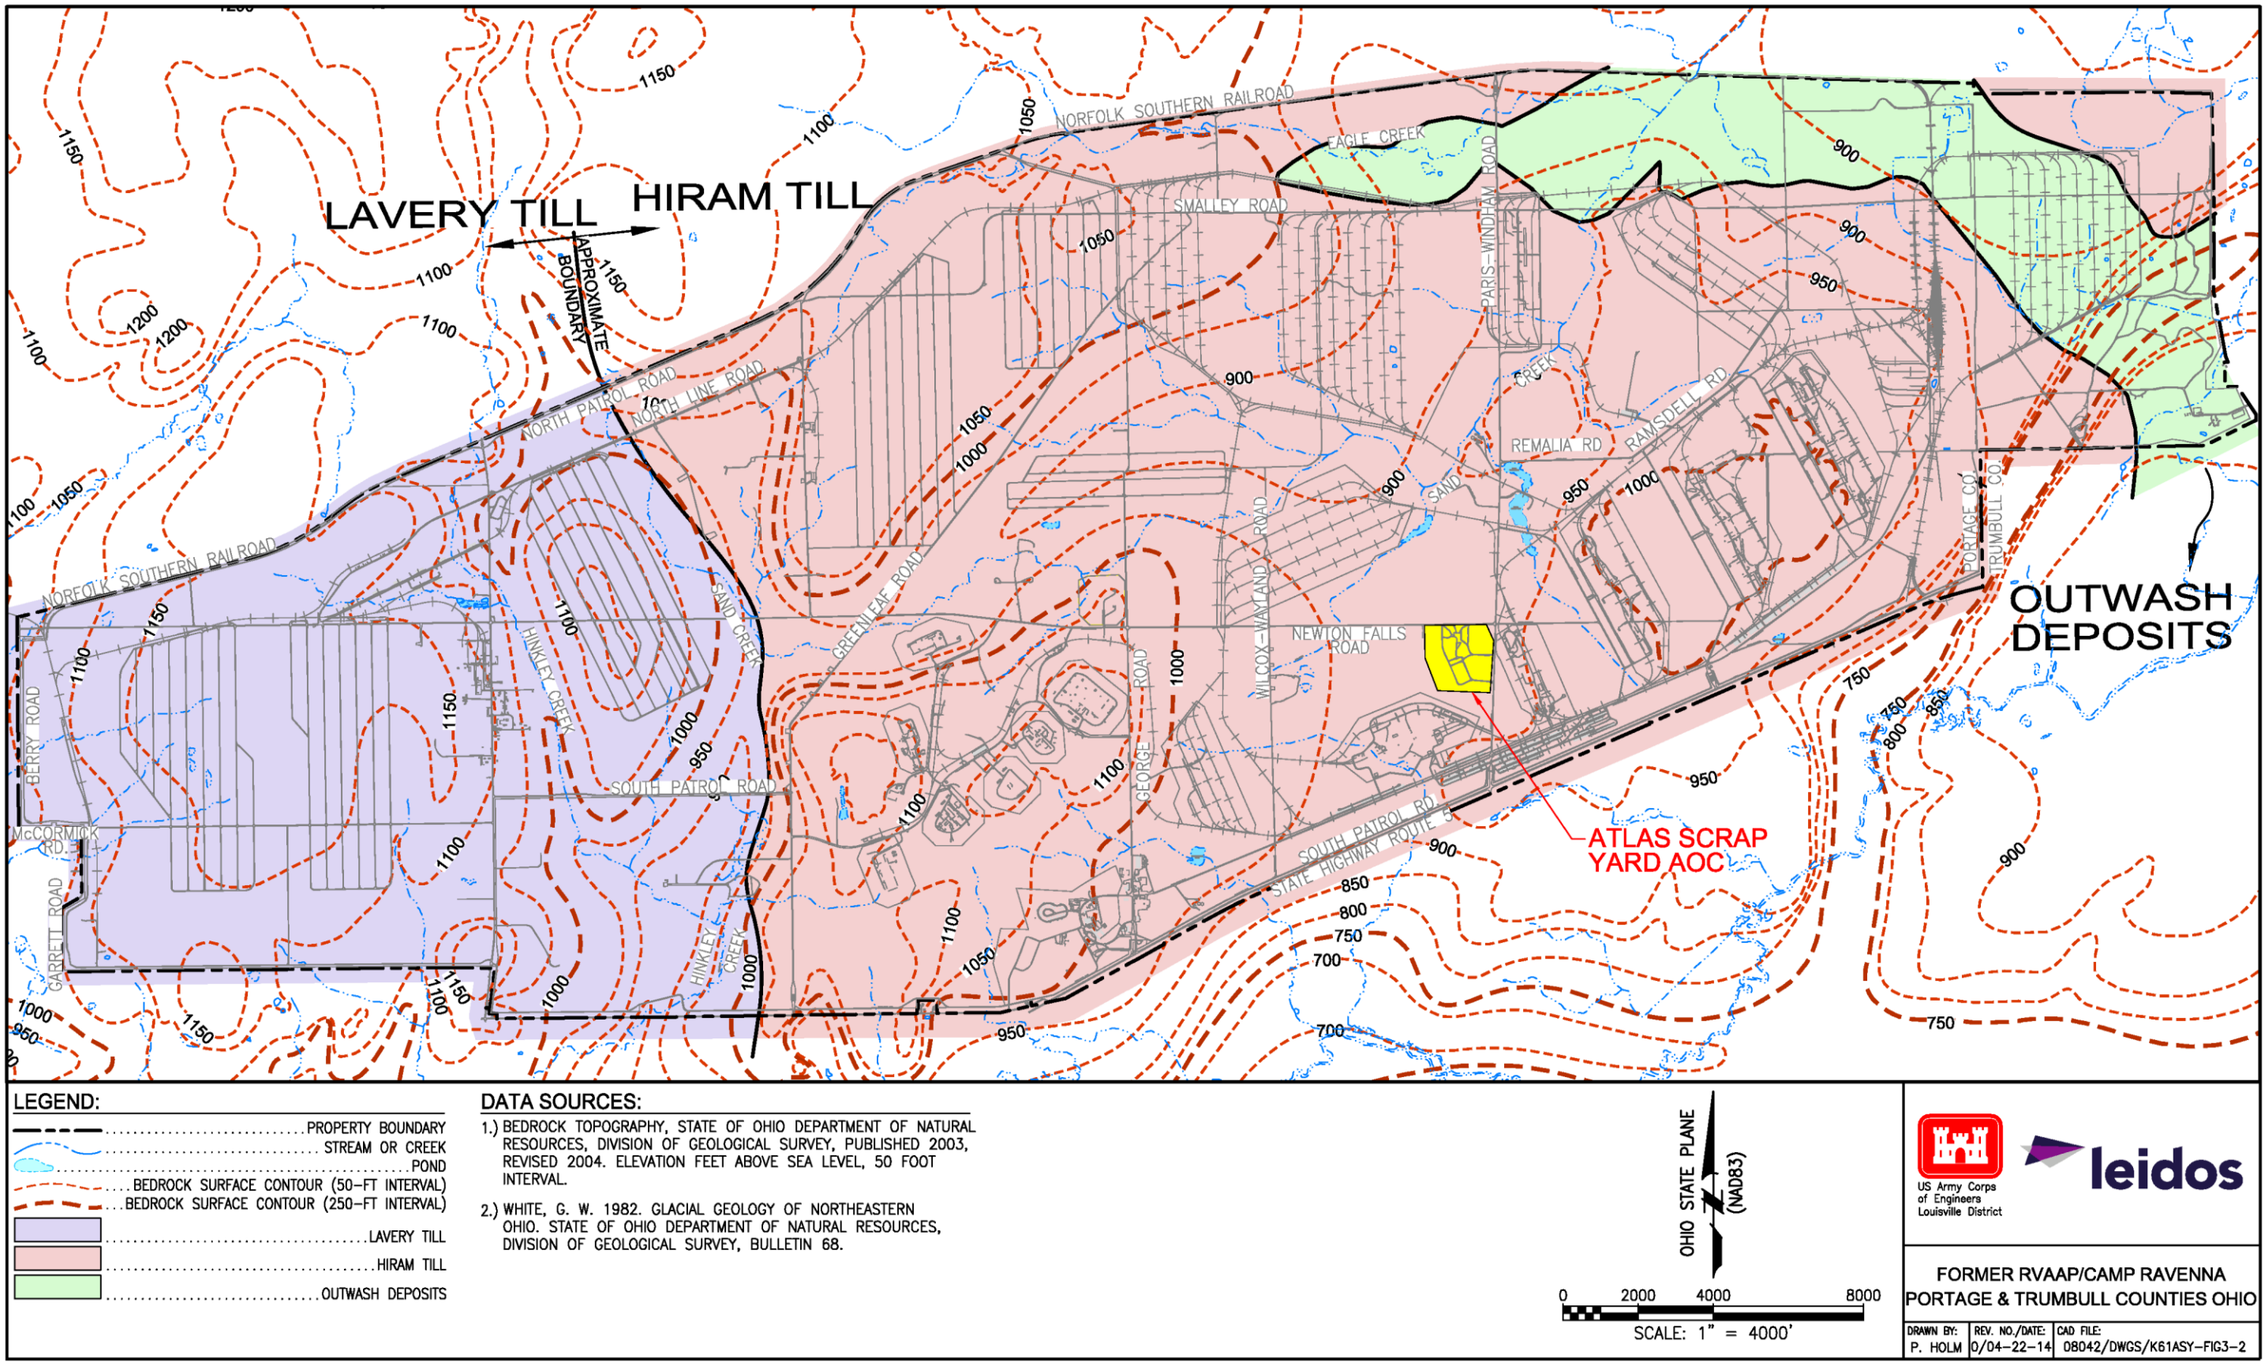


Figure 3–2. Geologic Map of Unconsolidated Deposits on Camp Ravenna

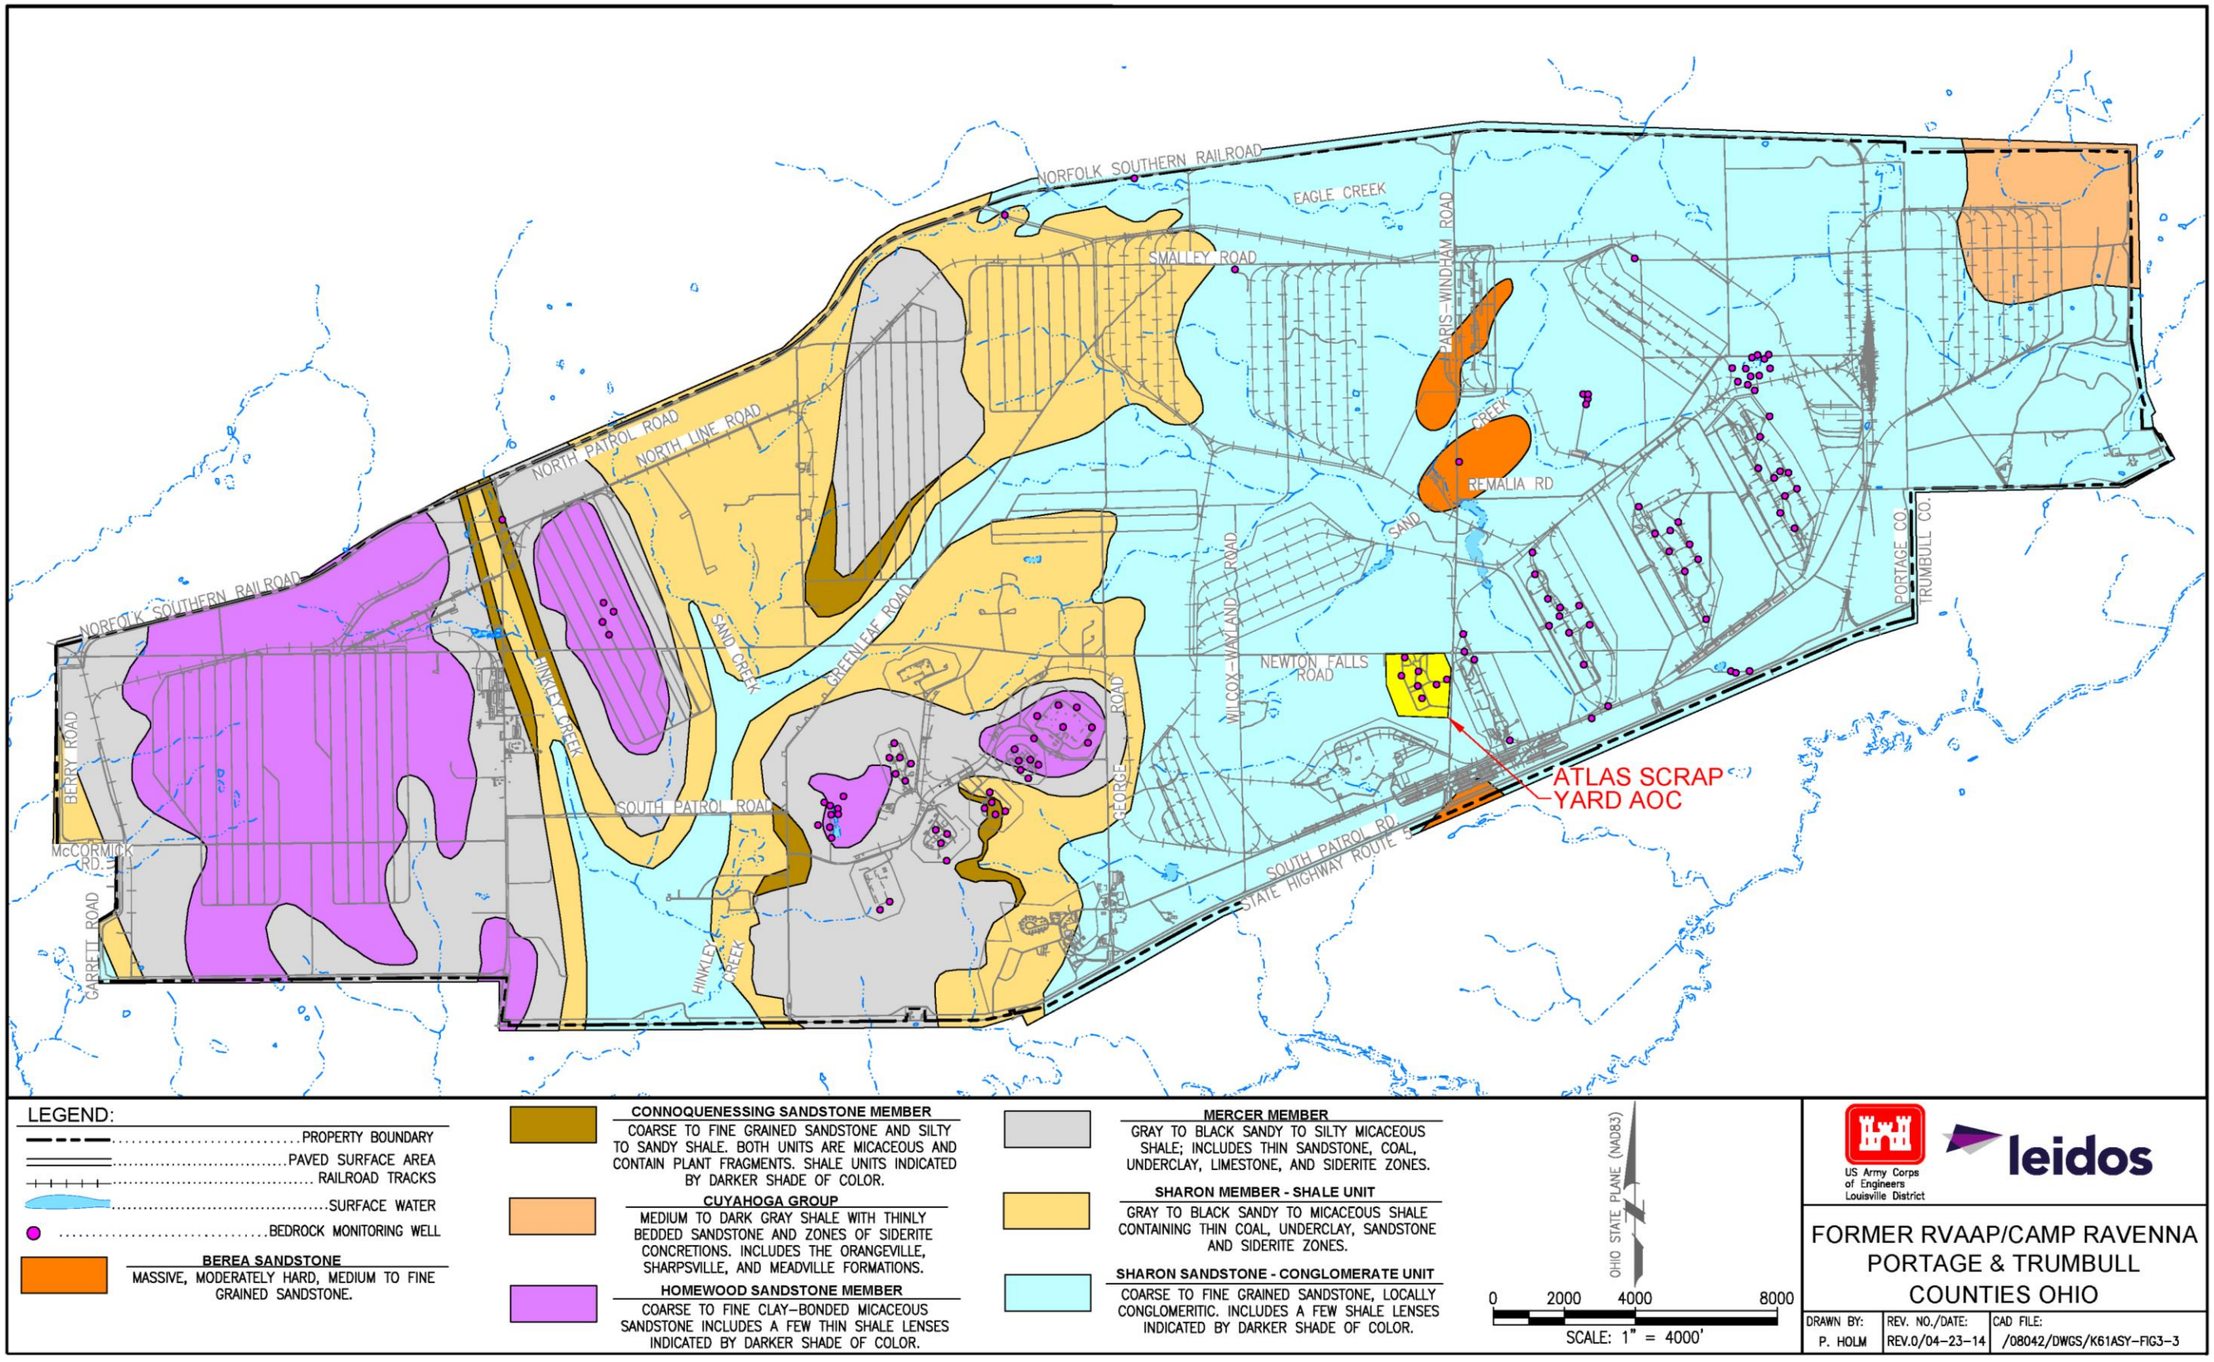


Figure 3–3. Geologic Bedrock Map and Stratigraphic Description of Units on Camp Ravenna

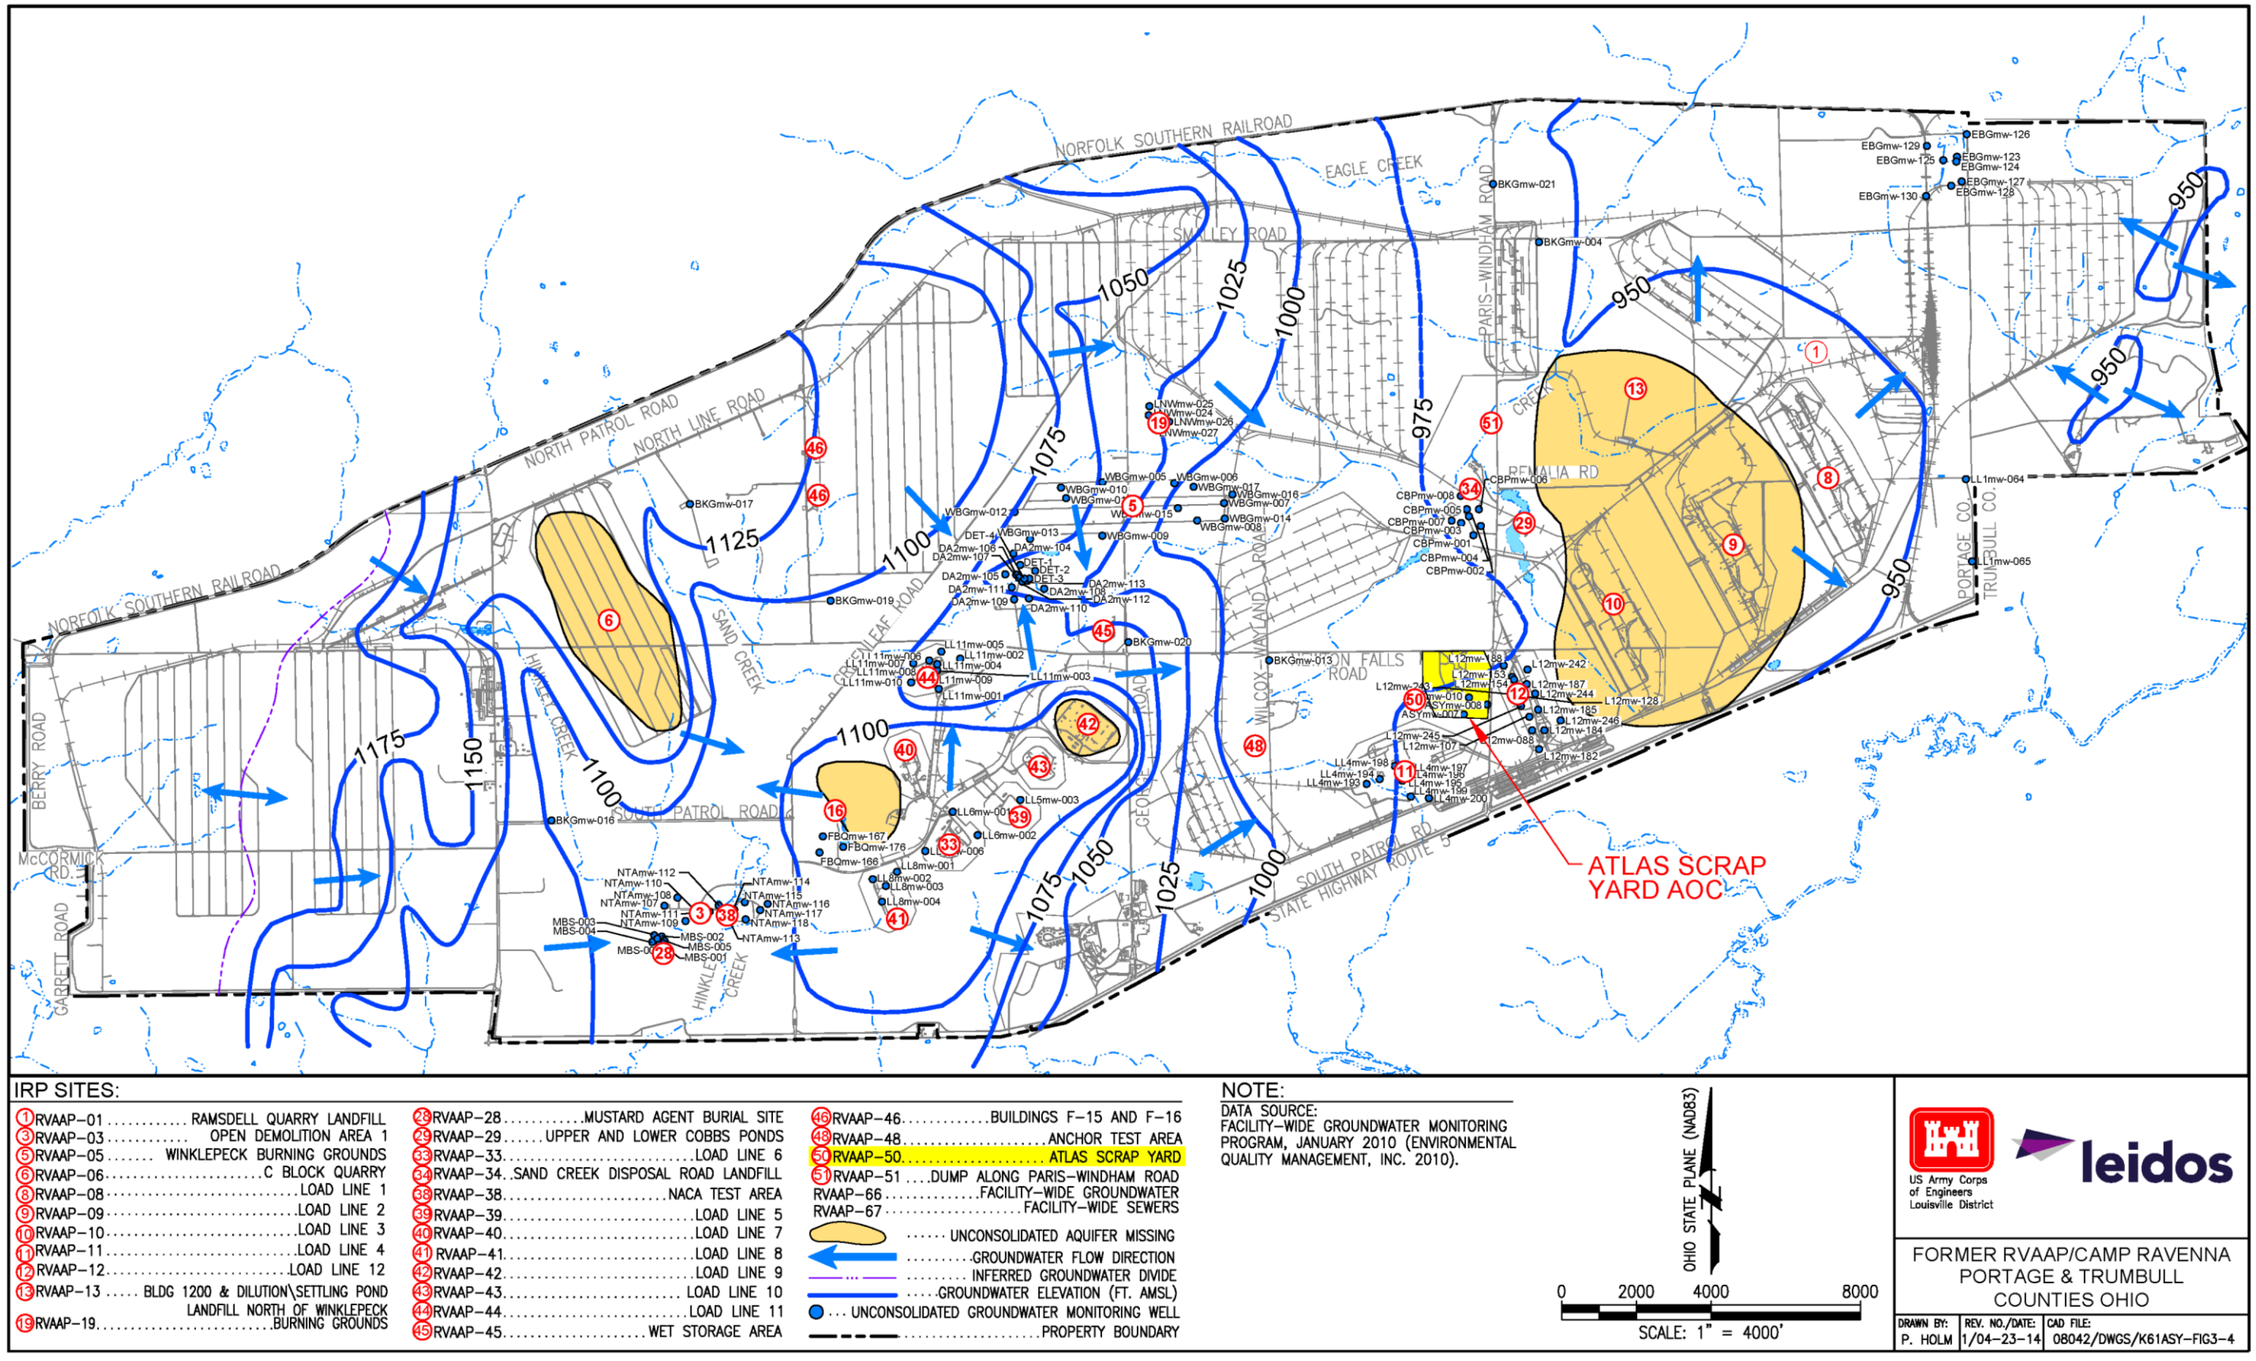


Figure 3–4. Potentiometric Surface of Unconsolidated Aquifer at Camp Ravenna

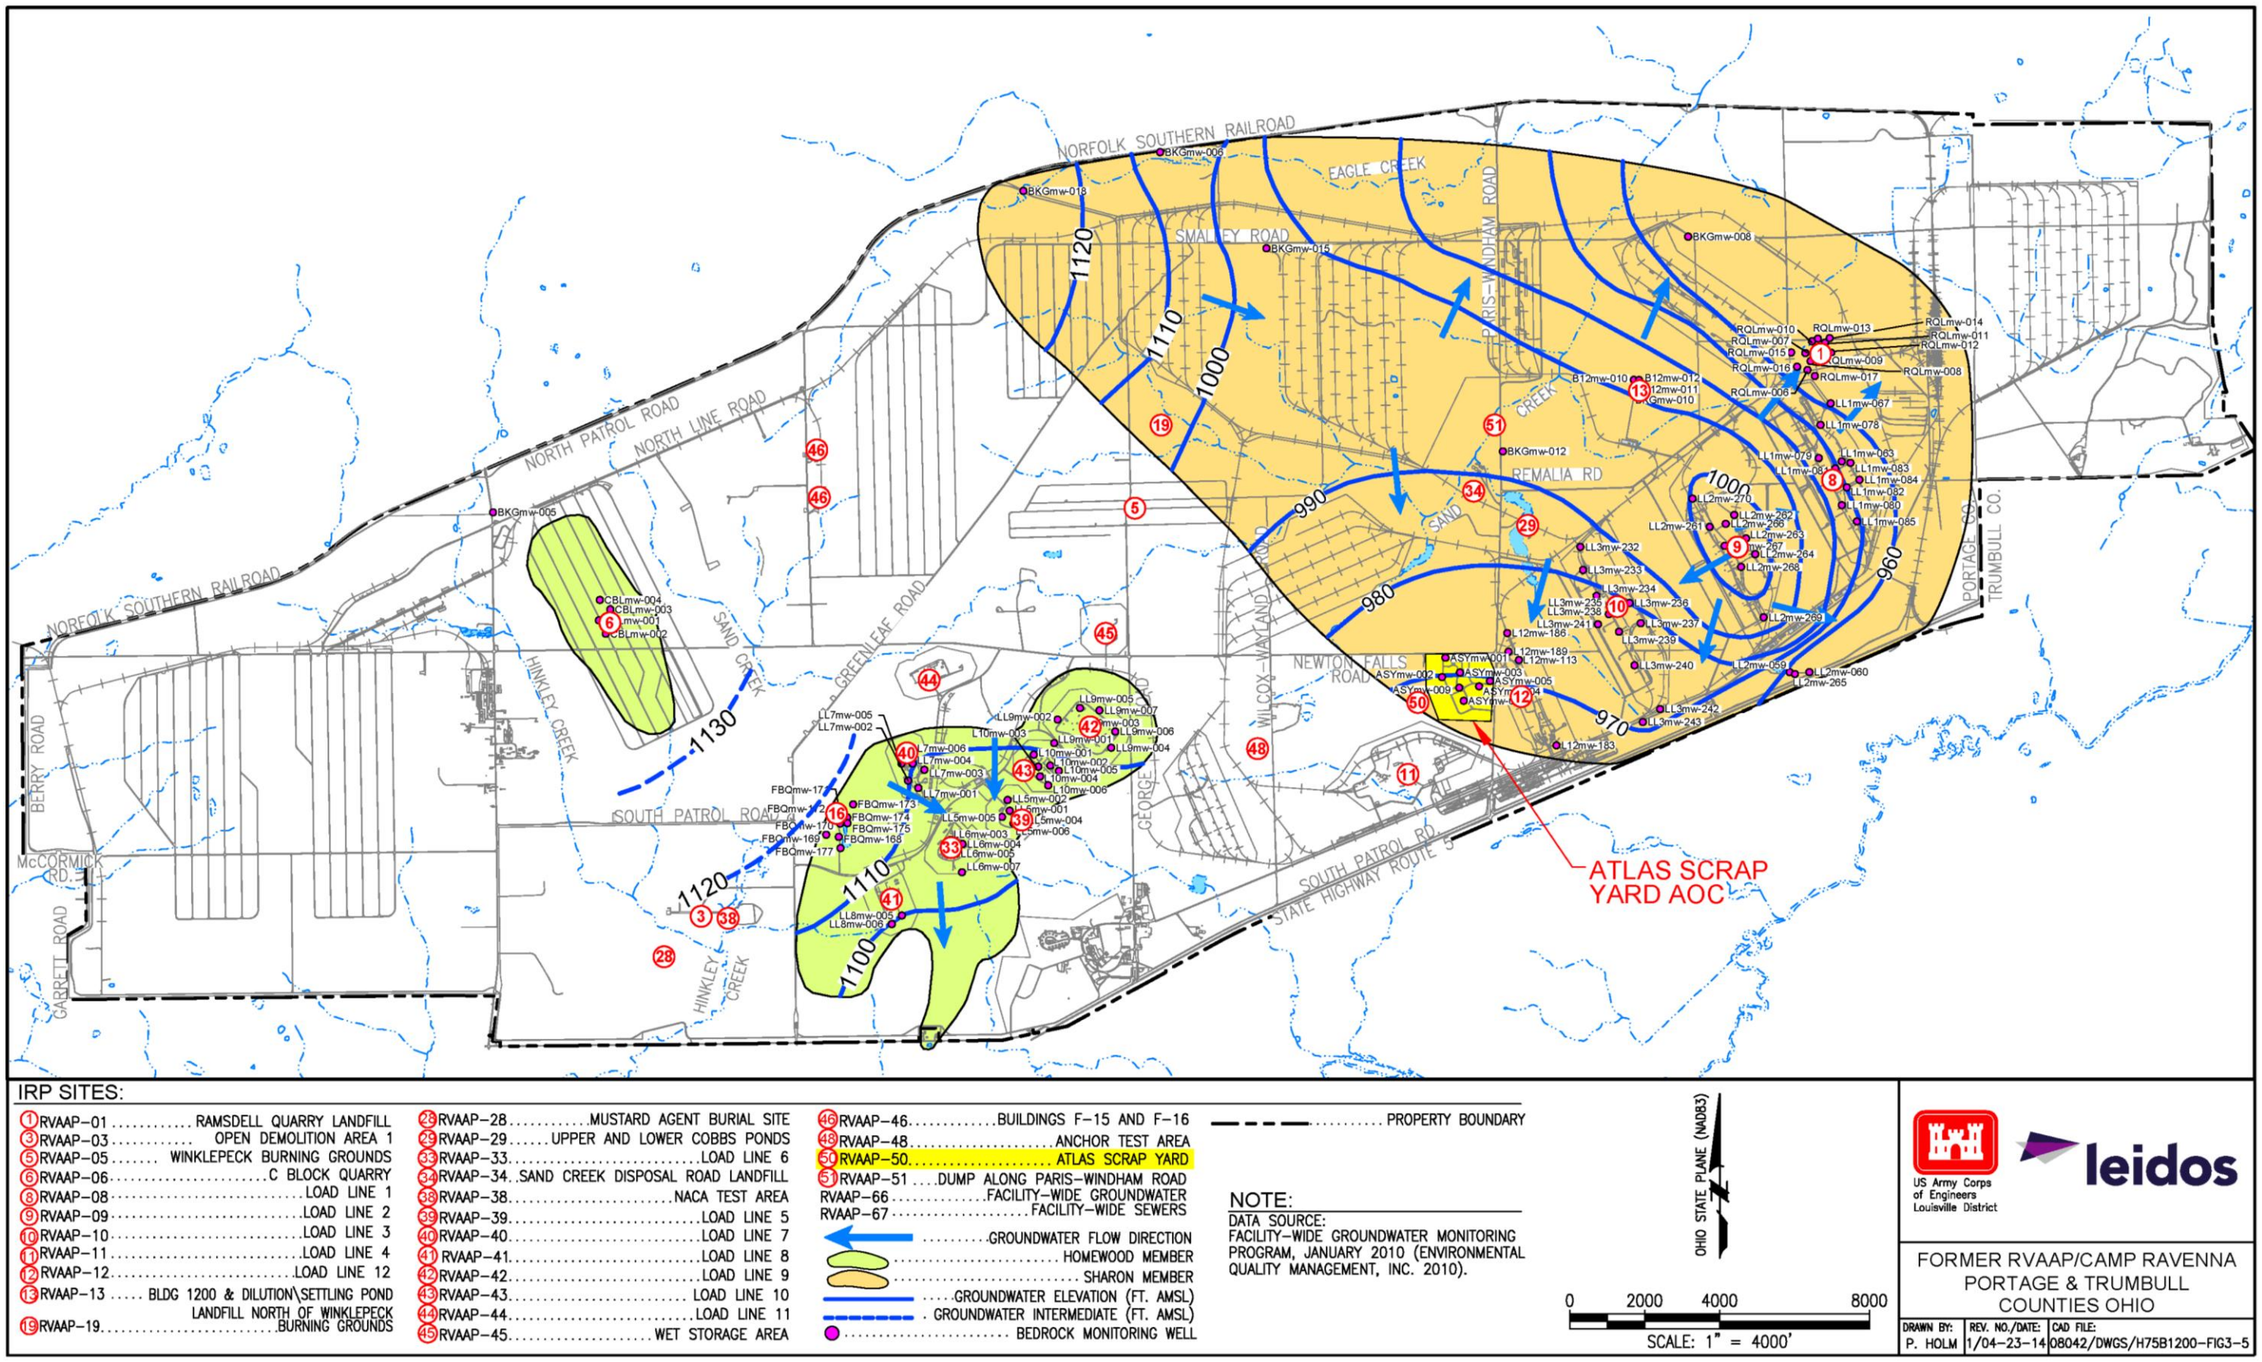


Figure 3–5. Potentiometric Surface of Bedrock Aquifers at Camp Ravenna

THIS PAGE INTENTIONALLY LEFT BLANK.

4.0 SITE ASSESSMENTS, INVESTIGATIONS, AND DATA ASSEMBLY

This section summarizes all previous site assessments and investigations conducted at Atlas Scrap Yard. These previous activities ranged from assessments to prioritize an AOC to investigations that collected data used in support of this RI.

4.1 ATLAS SCRAP YARD PREVIOUS ASSESSMENTS AND EVALUATIONS

This section summarizes previous assessments and evaluations conducted at Atlas Scrap Yard. These activities were generally performed to do an initial evaluation and/or prioritization assessment of the AOC. The data collected as part of these prioritization assessments and evaluations are not used in the nature and extent, fate and transport, HHRA, or ERA.

4.1.1 Relative Risk Site Evaluation for Newly Added Sites

In 1998, the U.S. Army Center for Health Promotion and Preventative Medicine (USACHPPM) completed the *Relative Risk Site Evaluation for Newly Added Sites* (USACHPPM 1998) to "provide sufficient data to score RVAAP's newly discovered, previously uninvestigated sites…" This document identified and provided a risk evaluation for 13 newly discovered and previously uninvestigated sites for the purpose of prioritizing future remedial or corrective activities.

The data collected at the sites "…are minimal Level III data, as defined by U.S. EPA, and are not intended to be used as definitive evidence of contamination presence or absence or to support health risk assessment." This section summarizes the samples collected as part of the Relative Risk Site Evaluation (RRSE) data, the chemicals detected, and the associated prioritization recommendations, but the analytical results are not presented and are not used in subsequent evaluations in this RI Report. However, as stated in Appendix N, Section 1.2 of the *Final Sampling and Analysis Plan Addendum for the Characterization of 14 RVAAP AOCs* (MKM 2004), results of the RRSE and knowledge about potential source area locations were used to select sampling locations, determine sampling media, identify analyses, and determine numbers of samples to be collected as part of the Characterization of 14 AOCs.

The RRSE evaluated the soil pathway (human receptor endpoint) at Atlas Scrap Yard using data from seven surface soil samples analyzed for SVOCs, PCBs, herbicides, explosives, and TAL metals. The groundwater pathway (human receptor endpoint) was evaluated using data from one groundwater and two subsurface soil samples analyzed for the same compounds as surface soil, with the addition of VOCs. Sediment was not identified at the AOC, and surface water was determined to occur only intermittently as stormwater runoff. Therefore, sediment and surface water were not evaluated as part of the RRSE.

Groundwater concentrations were calculated by modeling analytical data from a subsurface soil sample collected from the depth interval of 12–16 ft bgs in the eastern portion of the AOC. The groundwater sample was collected in the center of the AOC at a depth of 7 ft bgs. Ten inorganic chemicals, three VOCs (acetone, benzene, and toluene), one SVOC (naphthalene), and one explosive

(1,2,3-trichlorobenzene) were identified for groundwater based on detected concentrations and model calculations. A total of 15 inorganic chemicals and 17 SVOCs were detected in surface soil. No explosives were detected.

The groundwater and surface soil pathways were evaluated as follows:

1. Groundwater
    a. Contaminant Hazard Factor – Moderate
    b. Migration Pathway Factor: Potential. There is no evidence that site contaminants are migrating. However, there are no physical barriers in place to prevent migration.
    c. Receptor Pathway Factor: Potential. It is unknown if any wells are directly downgradient from this AOC; however, groundwater near the AOC may be used for irrigation or drinking water.
2. Surface soil
    a. Contaminant Hazard Factor – Moderate
    b. Migration Pathway Factor: Potential. There is no evidence that site contaminants are migrating. However, there are no physical barriers in place to prevent migration.
    c. Receptor Pathway Factor: Potential. This area is not used for production and is not populated with workers. However, there is no fence around the site; and hunters, scrappers, and others could access the site.

Human receptor endpoints were evaluated based on the available surface soil and groundwater data. The RRSE scored Atlas Scrap Yard as a "medium-priority" AOC due to potentially contaminated surface soil and groundwater potentially migrating and affecting human and ecological receptors (USACHPPM 1998).

4.2 ATLAS SCRAP YARD REMEDIAL INVESTIGATIONS

This section summarizes previous RIs or characterizations conducted at Atlas Scrap Yard. These investigations collected data to support the assessment performed as part of the RI, including the nature and extent, fate and transport, HHRA, and ERA.

4.2.1 Characterization of 14 AOCs

The Characterization of 14 AOCs data quality objectives (DQOs) was to collect and provide sufficient, high quality data for all applicable media such that future actions (i.e. human health and ERAs) can be efficiently planned and accomplished at each AOC. Data generated by the characterization activities will be used to determine if residual contaminants remain at the AOCs, if contaminants impact soil, sediment, surface water, or groundwater, if there is a need for more extensive risk assessments, and if remedial actions are appropriate.

In 2004, sampling was conducted at Atlas Scrap Yard in accordance with the *Final Sampling and Analysis Plan Addendum for the Characterization of 14 RVAAP AOCs* (MKM 2004) (herein referred to as the Characterization of 14 AOCs SAP).

The Characterization of 14 AOCs investigation was performed to accomplish the following:

- Provide data for future assessments that may be conducted;
- Develop a CSM;
- Identify key elements to be considered in future actions;
- Assess potential sources of contamination;
- Identify whether releases of contamination extend beyond the AOC boundary;
- Provide an initial assessment of the nature and lateral extent of contamination; and
- Provide preliminary human health risk screening (HHRS) and ecological risk screening (ERS) evaluations.

Results of this characterization are presented in the *Characterization of 14 AOCs at the Ravenna Army Ammunition Plant* (MKM 2007) (herein referred to as the Characterization of 14 AOCs report) and are summarized below.

4.2.1.1 Field Activities

The following investigation field activities were conducted from August 2004 to May 2005 to assess the potential soil impacts from former operations at Atlas Scrap Yard (MKM 2007):

- Collected 33 multi-incremental (MI) surface soil (0–1 ft bgs) samples (co-located discrete samples were collected if VOCs were analyzed);
- Collected one ISM sediment sample taken from a drainage ditch exiting the AOC (ASYsd-024);
- Collected three surface soil quality assurance/quality control (QA/QC) samples;
- Collected geotechnical samples from monitoring well borings;
- Completed an electromagnetic geophysical investigation over the two former service stations with underground storage tanks.

In addition, the following activities also took place. However, these activities are pertinent to other co-located AOCs associated with Atlas Scrap Yard (e.g., Facility-wide Groundwater and Facility-wide Sewers) and are not discussed in this section, nor are they pertinent to this RI:

- Excavated eight test trenches to support well installation;
- Installed, developed, and sampled 10 groundwater monitoring wells;
- Completed in-situ permeability testing (slug tests);
- Collected surface water samples from sanitary sewers; and
- Collected sediment samples from sanitary sewers.

The Characterization of 14 AOCs utilized MI samples. This sampling technique is currently referred to as ISM. Atlas Scrap Yard was divided into 34 ISM grids located around stockpiles of debris consisting of pipes, railroad ballast, railroad ties, concrete rubble, and chipped ammunition boxes. Additional ISM grids were located in portions of the AOC where specific operations occurred or where equipment associated with specific operations was located. Samples were also collected from dry ditches located within the AOC.

At the sample location in the ditch east of Paris-Windham Road (ASYsd-024M), the sampling crew found standing water and sediment. The sample was recharacterized as a sediment sample and was included in the nature and extent, HHRS, and ERS for sediment, which constituted 10 other sewer sediment samples. As the summary of sediments in the Characterization of 14 AOCs report is predominantly sewer sediment, it is not summarized in this report except for specific results of ASYsd-024. As part of the PBA08 RI-April 2010 investigation, sample LL12sd-308 was collected in the same location to provide more recent data.

Analytical laboratory procedures were completed in accordance with applicable professional standards, EPA requirements, government regulations and guidelines, and specific project goals and requirements. Samples were analyzed as specified by the FWSAP current at the time of the investigation, the Characterization of 14 AOCs SAP (MKM 2004), and the USACE Louisville Chemistry Guidance (LCG) (USACE 2002). The DQOs established for the Characterization of the 14 AOCs complied with EPA Region V guidance. The requisite number of QA/QC samples was obtained during the investigation. The data validation determined that the data meets the completeness requirements for the project (90 percent complete), is usable, and that it satisfies the DQOs for this project.

Figure 4-1 presents the locations sampled under the Characterization of 14 AOCs. Table 4-1 presents the ISM sample locations, associated operations, and suite of chemicals analyzed as part of the Characterization of 14 AOCs. Tables 4-2 and 4-3 present the detected results of the samples collected.

4.2.1.2 Nature and Extent of Contamination

Contaminants were detected above the screening criteria in effect at that time in surface soil (0–1 ft). Contaminants detected in surface soil (0–1 ft) above background and/or Region 9 residential preliminary remediation goal (PRG) screening values at that time included 22 metals and 5 SVOCs. SVOCs were detected above screening criteria in all five surface soil (0–1 ft) samples analyzed. Figure 4-1 presents locations that exceed current screening criteria.

During test trench excavation, activities were concluded upon encountering groundwater. Saturated conditions were encountered from 7.2–14 ft bgs. No visual evidence of contamination or MEC was encountered during trenching activities.

4.2.1.3 Human Health Risk Screening

The HHRS compared chemical concentrations detected in samples to RVAAP screening criteria in effect at that time, which included facility-wide background concentrations for inorganic chemicals and USEPA Region 9 residential PRGs. Constituents were retained if they did not have screening values. The results of the HHRS identified contaminants above screening criteria in surface soil, as summarized in Table 4-4. Sediment and surface water samples collected during the investigation were associated only with infrastructure (i.e., sumps, basins, and sewers) or the ditch exiting the AOC and are not included in Table 4-4. Sediment and surface water were not present within drainage conveyances within the AOC during the Characterization of 14 AOCs investigation; however, the drainage ditch east of Paris-Windham Road leading into Load Line 12 (ASYsd-024M) did have standing water during the investigation.

4.2.1.4 Ecological Risk Screening

The ERS compared chemical concentrations detected in Atlas Scrap Yard environmental media to RVAAP facility-wide background concentrations for inorganic chemicals and ecological screening values (ESVs). The ERS followed screening methodology guidance presented in the *RVAAP Facility-Wide Ecological Risk Work Plan* (USACE 2003b) (herein referred to as the FWERWP) and *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2003). Chemicals were retained if they did not have screening values. Table 4-5 presents the chemicals identified in the ERS as exceeding screening values for Atlas Scrap Yard. Sediment and surface water samples collected during the investigation were associated only with infrastructure (i.e., sumps, basins, and sewers) or the ditch on the other side of Paris-Windham Road leading into Load Line 12 and are not included in Table 4-5. Sediment and surface water were not present within drainage conveyances within the AOC during the Characterization of 14 AOCs investigation; however, the drainage ditch east of Paris-Windham Road leading into Load Line 12 (ASYsd-024M) did have standing water during the investigation.

4.2.1.5 Geophysical Survey

An electromagnetic geophysical survey was conducted at two locations within the Atlas Scrap Yard. Based upon historical records, these two sites functioned as fueling stations during operations. The objective of the surveys was to locate subsurface metallic targets that could be USTs. The surveys were conducted using two electromagnetic geophysical devices, including an EM31/MK2 and Geonics EM61. The survey's spatial positions were recorded using a Trimble global positioning system (GPS) Total Station 5700® and rover to provide positional accuracy of 3 cm for stacked, stationary readings.

A total of 480 anomalies were picked from the EM61 data. Twenty anomalies fitting the size criteria for a possible UST were selected for further investigation. One additional anomaly was picked from the EM31 data collected at Site 2. Although this anomaly does not fit the expected size of a buried UST, it may correspond to remnants of structures associated with the filling station.

4.2.1.6 Conclusions

The Characterization of 14 AOCs recommended that a full risk assessment should be considered to assist in the overall risk management decisions for Atlas Scrap Yard.

4.2.2 PBA08 Remedial Investigation – April 2010

In November 2008, Leidos scientists performed a site walk of Atlas Scrap Yard. The site walk was conducted to develop the Performance Based Acquisition 2008 Supplemental Investigation Sampling and Analysis Plan Addendum No. 1 (PBA08 SAP), which supplemented the Characterization of 14 AOCs investigation and complete the RI phase of the CERCLA process. This site walk did not identify any significant changes from what was expected at Atlas Scrap Yard, with the exception that materials present in the Railroad Ballast polygon shown in the Characterization of 14 AOCs appears to have been removed, and the area generally seemed to have more vegetation. The other main materials stored onsite were still present (e.g., railroad ties, concrete rubble). The PBA08 SAP was reviewed and approved by representatives of RVAAP, Ohio EPA, USACE Louisville, and Camp Ravenna in January 2010.

In April 2010, the PBA08 RI was implemented by collecting discrete surface soil and subsurface soil samples and ISM surface soil samples. The results of the PBA08 RI sampling, combined with the results of the Characterization of 14 AOCs, were used to evaluate the nature and extent of contamination, assess potential future impacts to groundwater, conduct HHRAs and ERAs, and evaluate the need for remedial alternatives.

As part of the PBA08 RI DQOs, an initial screening approach was used to help focus the investigation on specific chemicals and areas to be further evaluated by assessing the nature and extent of contamination observed in historical samples (Section 3.2.2 of the PBA08 SAP). Decision flowcharts for PBA08 RI surface and subsurface sampling are presented in Figures 4-2 and 4-3, respectively. The screening approach presented in the PBA08 SAP compared sample results from the Characterization of 14 AOCs at Atlas Scrap Yard to chemical-specific facility-wide cleanup goals (FWCUGs) at the 1E-06 cancer risk level and non-carcinogenic risk Hazard Quotient (HQ) of 0.1, as presented within the RVAAP Facility-Wide Human Health Risk Assessor's Manual (USACE 2005b) (FWHHRAM). The most protective FWCUGs for the three potential receptors are referred to as "screening criteria." Previous results were also compared to FWCUGs at the higher target risk (TR) of 1E-05 and HQ of 1.0 to facilitate identifying potential source areas that may require additional sampling to refine the extent of contamination. Table 4-6 lists the chemicals with detected concentrations that exceed screening criteria at the time of the PBA08 SAP in historical soil samples.

No groundwater samples were collected during the PBA08 RI, as the current conditions of groundwater will be evaluated as an individual AOC for the entire facility (designated as RVAAP-66) and addressed in a separate RI/FS report. Surface water and sediment samples were not collected within the AOC during the PBA08 RI. Surface water is only present at the AOC during periods of heavy precipitation. Stormwater runoff at Atlas Scrap Yard ultimately discharges to Load Line 12. One co-located set of sediment and surface water samples (L12sd-308 and L12sw-308) were

collected in the ditch east of Atlas Scrap Yard along Paris-Windham Road under the PBA08 RI for Load Line 12. The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains details of sample collection. The sediment and surface water samples were incorporated into the Atlas Scrap Yard evaluation to represent the potential exit point for runoff or surface drainage from the AOC.

A sample log for each sample and lithologic soil description for each soil boring collected during the PBA08 RI is included in Appendix A. The DQOs, field activities, sampling methodologies, QA/QC, and management of analytical data for the PBA08 RI are further expanded upon in Appendix J.

4.2.2.1 Surface Soil Sampling Rationale – Source Area Investigation

Soil samples were collected during the PBA08 RI to assess contaminant occurrence and distribution in surface soil. The PBA08 RI samples were designed to delineate extent of areas previously identified as having the greatest likelihood of contamination (e.g., adjacent to production buildings or within sediment accumulation areas such as ditches). Table 4-7 presents the specific rationale for each surface soil sample collected in April 2010. Tables 4-12 and 4-13 present the analytical results of the PBA08 RI ISM and discrete surface soil samples.

In April 2010, 19 ISM samples were collected around former ISM sample areas to delineate locations where chemicals were detected above FWCUGs [hazard index (HI)=1, TR=10-5] and to further define the lateral extent of contamination (Figure 4-4). The exception was the drainage ditch samples at ASYss-027M and ASYss-032M were adequately delineated from the neighboring drainage ditches. The sample locations in the PBA08 SAP were derived from the sample polygons provided during the development of the SAP.

4.2.2.2 Surface Soil Sampling Rationale – Large ISM Samples

In April 2010, 18 large grid ISM samples (samples ASYss-086M through ASYss-103M) were collected to complete characterization of the AOC. Grid ISM sample locations ranged from 3.1–4.2 acres in extent, encompassing the entirety of the AOC. The individual large grid ISM samples included all areas within the grid boundary, including other sample locations that may overlap with the large ISM samples. These grid samples were collected to provide characterization of the entire AOC. The locations of these samples are presented in Figure 4-5. Table 4-12 presents the analytical results of the PBA08 RI ISM surface soil samples.

Of the source area ISM samples and large grid ISM samples, four ISM samples (15% of the total number of ISM samples collected) were randomly selected for analysis of RVAAP full-suite analytes [i.e., TAL metals, explosives, propellants (nitrocellulose and nitroguanidine), SVOCs, VOCs, PCBs, and pesticides].

4.2.2.3 Surface Soil Sampling Rationale – Chromium Speciation

Previous chromium speciation sampling was limited to the former service station locations (ASYss-005M and ASYss-012M). Hexavalent chromium was not detected at either location. Using the detection limit for hexavalent chromium and the total chromium detected, the percent of hexavalent chromium was calculated as less than 4.75% and 7.69% of the total chromium concentration, respectively.

As part of the PBA08 RI, three discrete chromium speciation samples were collected to evaluate the potential contribution of hexavalent chromium to the total chromium concentrations in soil. Samples from 0–1 ft bgs were collected in accordance with the bucket hand auger method described in Section 4.5.2.1.1 of the FWSAP (USACE 2001a). Two samples were collected from areas previously identified as having elevated total chromium concentrations (ASYss-019M and ASYss-013M), and one sample was collected from an area previously identified as having a total chromium concentration near background concentrations (ASYss-031M). The rationale for the samples collected as part of the PBA08 RI is summarized in Table 4-8. Table 4-14 presents the analytical results of the PBA08 RI subsurface soil samples. The locations of these samples are presented in Figure 4-4.

4.2.2.4 Subsurface Soil Sampling Rationale and Methods

The PBA08 RI used discrete samples from soil borings to complete the characterization of subsurface soil. The subsurface soil was characterized by placing borings in various areas, including areas with previous surface soil results greater than the screening criteria, areas with previous results only slightly greater than the screening criteria, and areas not previously sampled. Subsurface soil sampling was conducted according to the decision rules approved in the PBA08 SAP.

In all cases, subsurface borings were biased toward areas where contamination from historic uses or site drainage was most likely. Soil samples from 19 soil borings installed in ISM areas with historical screening criteria exceedances were collected to further delineate the vertical extent of contamination in subsurface soil at the AOC (Figure 4-4). Table 4-9 presents the specific rationale for each subsurface soil sample collected for the PBA08 RI.

The sampling depth intervals were presented in the PBA08 SAP. Each soil boring was sampled at the following intervals: 0–1 ft bgs, 1–4 ft bgs, 4–7 ft bgs, and 7–13 ft bgs. These sample intervals were selected, as documented in the PBA08 SAP, to be able to evaluate surface and subsurface exposure depths for the Resident Receptor (0–1 ft bgs and 1–13 ft bgs) and National Guard Trainee (0–4 ft bgs, 4–7 ft bgs).

The sample collected from the 7–13 ft bgs interval was archived on site, while the 4–7 ft bgs interval sample was analyzed under an expedited five-day turnaround time. As specified in the PBA08 SAP, if there was one chemical concentration that exceeded screening criteria in the 4–7 ft bgs sample, the 7–13 ft bgs sample was analyzed. In addition, at least 10% of all subsurface samples from 7–13 ft bgs were submitted for laboratory analysis to ensure adequate characterization of the subsurface soil to 13 ft bgs. Three samples collected from the 7–13 ft bgs sample interval were submitted for laboratory

analysis for this purpose. None of the archived 7–13 ft bgs samples were analyzed because there were no preliminary screening criteria exceedances in the 4–7 ft bgs interval.

Four geotechnical samples were collected from two boring locations to provide soil data for fate and transport modeling. Pilot borings were installed with a Geoprobe® at sample locations ASYsb-051 and ASYsb-055 to a depth of 13 ft bgs to allow lithologic characterization of the soil and to determine the appropriate geotechnical sample intervals (Appendix A). The geotechnical sample location was offset from the pilot boring and drilled with hollow stem auger attachments. Geotechnical samples were then collected beneath the hollow stem augers at the designated sampling interval directly into Shelby Tubes. Undisturbed Shelby Tube samples were collected from 4.0–5.6 ft bgs and 8.5–10.0 ft bgs at location ASYsb-051 and from 4.0–5.5 ft bgs and 9.0–10.5 ft bgs at location ASYsb-055.

4.2.2.5 Sediment and Surface Soil Sampling

Surface water and sediment samples were not collected within the AOC during the PBA08 RI. Surface water is only present at the AOC during periods of heavy precipitation. Stormwater runoff at Atlas Scrap Yard ultimately discharges to Load Line 12. One co-located set of sediment and surface water samples (L12sd-308 and L12sw-308) were collected in the ditch east of Atlas Scrap Yard and Paris-Windham Road under the PBA08 RI for Load Line 12 (Figure 4-3). The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains details of sample collection. The sediment and surface water samples were incorporated into the Atlas Scrap Yard evaluation to represent the potential exit point for runoff or surface drainage from the AOC. Tables 4-15 and 4-16 present the results of the PBA08 RI sediment and surface water sample collected.

4.2.2.6 Changes from the Work Plan

Changes to the PBA08 SAP are documented in field change requests (FCRs) provided in Appendix B. Changes made in the field based on AOC-specific conditions are not documented on FCRs but on the field sampling logs (Appendix A). These changes are presented in Table 4-10 and on the field sample logs. Revised coordinates for all locations can be found on the field sampling logs.

4.2.3 PBA08 Remedial Investigation - April 2011

Upon the development of the RI Report after collection of the April 2010 data, it was discovered that the Characterization of 14 AOCs polygons provided in the development of the PBA08 SAP were polygons from the Characterization of 14 AOCs SAP (MKM 2004), as opposed to the final polygons presented in the Characterization of 14 AOCs report (MKM 2007). With this discovery, some of the polygons sampled during the PBA08 RI in April 2010 did not meet the intention of the original SAP. For example, some bounding samples went through the original samples, as opposed to being on the outside of the samples, as presented on Figure 4-6.

Accordingly, the PBA08 RI data and characterization conducted in April 2010 were reassessed using the final Characterization of 14 AOCs polygons from the report. This assessment included an

evaluation of the sample results and potential risk that needed re-evaluation. This assessment concluded that further investigation in the ASA was warranted due to contaminant levels. Further evaluation of the IA was not deemed necessary, as adequate sampling was conducted to assess potential site risks.

Accordingly, in April 2011, an additional sampling event was conducted to refine areas within the ASA, specifically where elevated PAH contamination was identified. Three features within the ASA were targeted during the April 2011 investigation:

1. The debris piles, including railroad tie, concrete debris, and other rubble piles.
2. The parking areas made up of slag and asphalt gravel west of the railroad tie pile.
3. The ditch alongside the access road entering the AOC from Newton Falls Road.

The debris piles (railroad ties, concrete debris, and other rubble piles) were considered for additional evaluation to determine if they were the sources of contamination observed in the 2010 grid samples ASYss-089M and ASYss-088M. The objective of the April 2011 sampling was to collect ISM samples at varying distances to the piles to better define the horizontal extent of contamination. ISM samples from areas 5 and 10 ft wide were collected immediately adjacent to and around the piles.

The parking areas made up of slag and asphalt gravel have been maintained to sustain vehicle or machine traffic at the ASA and are currently covered with gravel and wood chips. These areas were initially sampled in 2010 as ASYss-089M and ASYss-088M. In 2011, these two grid samples were subdivided into ASYss-116M, ASYss-117M, ASYss-118M, and ASYss-119M for sampling based on the current location of the parking/staging area. The ditch alongside the access road that enters the AOC from Newton Falls Road was originally included in the 2010 grid sample ASYss-093M and was resampled in 2011 as locations ASYss-123M and ASYss-126M.

Table 4-11 presents the sampling scheme and rationale for the samples collected in April 2011. Figure 4-7 presents the April 2011 sampling scheme and photographs of the ASA features. Each sample was analyzed for TAL metals and PAHs.

4.3 FACILITY-WIDE BACKGROUND EVALUATION

Development of facility-wide background values for inorganic constituents in soil, sediment, surface water, and groundwater was conducted in 1998, as documented in the *Phase II Remedial Investigation Report for the Winklepeck Burning Grounds* (USACE 2001b). Background locations were selected using aerial photographs and site visits from areas believed to be unaffected by RVAAP activities. Soil, sediment, surface water, and groundwater samples were collected from those locations to determine the range of background concentrations that could be expected in these media. Results from the site-specific background data collection were used to determine if detected metals and potential anthropogenic compounds (such as PAHs) are site related or naturally occurring.

A total of 14 wells were installed in established background locations to collect filtered and unfiltered samples from the bedrock and unconsolidated zones. These samples were analyzed for TAL metals and cyanide for determining background concentrations.

Soil samples were collected from each of the background monitoring well locations from three intervals: 0–1 ft bgs, 1–3 ft bgs, and >3 ft bgs. Because boring locations were changed during sampling based on the lithological requirements for well screen intervals, all depth intervals for soils were not sampled for each boring. Background surface soil samples were analyzed for TAL metals, cyanide, SVOCs, and total organic carbon (TOC).

Seven stream locations upstream of RVAAP activities were sampled for sediment and surface water to characterize background conditions. Seven locations for the sampling of sediment and surface water representative of background conditions were selected along Hinkley, Sand, and Eagle Creeks. Background sediment samples were analyzed for TAL metals, cyanide, SVOCs, and TOC.

Using the sampling results, an evaluation of outliers, data assessment, and statistical analysis were performed to determine background concentrations for each media. For surface soil samples, PAHs, in addition to metals, were elevated in four samples. PAHs are related to combustion products and could indicate human disturbance at the locations where they were detected. Visits to the sampling locations and review of aerial photography from before the plant activities started indicate that these sampling locations were near homes or farms and could have been influenced by activities associated with those structures.

During the finalization of background concentrations at the former RVAAP, it was agreed upon with the U.S. Army and Ohio EPA that the formal background concentrations would only be applicable for metals. The final, approved background concentrations are presented in Table 4-17.

4.4 DATA EVALUATION METHOD

Data evaluation methods for Atlas Scrap Yard are consistent with those established in the FWCUG Report and specified in the PBA08 SAP. The processes used to evaluate the analytical data involved three general steps: (1) defining data aggregates; (2) data verification, reduction, and screening; and (3) data presentation.

4.4.1 Definition of Aggregates

Atlas Scrap Yard data were aggregated in four ways for evaluating contaminant nature and extent. The initial basic aggregation of data was by environmental medium: surface soil, subsurface soil, sediment, and surface water. For each medium-specific aggregate, an evaluation was conducted to determine if further aggregation was warranted with respect to AOC characteristics, historical operations, ecological habitat, and potential future remedial strategy and land use (e.g., spatial aggregates). Data for soil were further aggregated based on depth and sample type for consistency with human health risk guidance established in the FWHHRAM and FWCUG Report. Data aggregates for evaluating the nature and extent of contamination at Atlas Scrap Yard are as follows:

- **Surface Soil (0–1 ft bgs):** This medium was evaluated on an ISM by ISM basis with additional consideration for the ASA and IA aggregates.
- **Subsurface Soil (> 1 ft bgs):** Includes data from sample intervals 1–4, 4–7, and 7–13 ft bgs: this medium was evaluated as an AOC-wide aggregate with additional consideration for the ASA and IA.
- **Surface Water:** Perennial surface water is not present within Atlas Scrap Yard. Surface water only occurs intermittently as stormwater runoff. The nature and extent evaluation for Atlas Scrap Yard includes L12-308, which is downstream from the surface water discharge point, adjacent to Load Line 12. This sample location was evaluated as one data aggregate for evaluating nature and extent of contamination in this report and is included in the HHRA in the *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c).
- **Sediment:** Sediment is not present as an aggregate at Atlas Scrap Yard, as surface water only occurs intermittently, and dry sediment is classified as soil in this report. As with surface water, the nature and extent evaluation for sediment associated with the drainage ditch from Atlas Scrap Yard includes L12-308, which is downstream from the surface water discharge point on the other side of Paris-Windham Road, adjacent to Load Line 12. This sample location is included in the HHRA in the *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c). In addition, the nature and extent evaluation included ISM sample ASYsd-024M-SD collected from the same reach of the drainage ditch during the Characterization of 14 AOCs.

The soil data aggregates are further subdivided for the HHRA and ERAs as discussed in Section 7.1.1.

4.4.2 Data Verification, Reduction, and Screening

4.4.2.1 Data Verification

Data verification was performed on 128 surface soil, subsurface soil, sediment, and surface water samples (including QC duplicates) collected during the PBA08 RI in 2010 and 2011. Historical data were verified and completed as presented in the historical reports. Analytical results were reported by the laboratory in electronic format and loaded into the Ravenna Environmental Information Management System (REIMS) database. Data verification was performed to ensure all requested data were received and complete. Data qualifiers were assigned to each result based on the laboratory QA review and verification criteria. Results were qualified as follows:

- "U" not detected;
- "UJ" not detected, reporting limit estimated;
- "J" indicates the analyte was positively identified, but the associated numerical value is an approximate concentration of the analyte in the sample; and
- "R" result not usable.

In addition to assigning qualifiers, the verification process also selected the appropriate result to use when performing re-analyses or dilutions. Where laboratory surrogate recovery data or laboratory QC samples were outside of analytical method specifications, the verification chemist determined whether laboratory re-analysis should be used in place of an original reported result. If the laboratory reported results for diluted and undiluted samples, diluted sample results were used for analytes that exceeded the calibration range of the undiluted sample. A complete discussion of verification process results is contained in the data QC summary report (Appendix C). The data QC summary report also includes a summary table of the assigned data qualifiers and the accompanying rationale. Independent, third-party validation of 10% of the RI data and 100% of the USACE QA laboratory data was performed by a subcontractor to the USACE, Louisville District.

4.4.2.2 Data Reduction

Calculating data summary statistics was the initial step in the data reduction process to identify SRCs. Eligible historical and current AOC data were extracted from the database. Results from QC splits and field duplicates, as well as rejected results, were excluded from the data screening process. All analytes having at least one detected value were included in the data reduction process.

Summary statistics calculated for each data aggregate included the minimum, maximum, and average (mean) values and the proportion of detected results to the total number of samples included in the data screening process. For calculating mean values, non-detected results were addressed by using one-half of the reported detection limit as a surrogate value during calculation of the mean result for each compound (USEPA 1989).

Non-detected results with elevated detection limits (more than five times the contract-required detection limit) were excluded from the summary statistics in order to avoid skewing the mean value calculations.

4.4.2.3 Data Screening

After reduction, the data were screened to identify SRCs using the processes outlined below. Only ISM sample locations were used in the SRC screening process for surface soil. The discrete surface soil samples (0–1 ft bgs) are also included in the assessment of the site. There may be instances that a maximum concentration in a discrete surface soil sample exceeds the maximum concentration presented in the SRC table, as only ISM sample locations were used in the SRC screening process. All subsurface soil samples collected under the PBA08 RI were collected as discrete soil borings and screened for SRCs. One historical sediment sample was collected east (downstream) of the AOC via ISM methods at the western boundary of Load Line 12 along the drainage ditch beneath Paris-Windham Road, and one PBA08 RI sample was collected at the same location via discrete sampling methods. The two sediment samples (i.e., ISM and discrete) were screened for SRCs separately due to the difference in collection methodologies. A co-located surface water sample was also collected using discrete methods under the PBA08 RI and was the only surface water sample available for use in the SRC screening process.

Additional screening of identified SRCs was conducted: (1) in the fate and transport evaluation (Section 6.0) to identify CMCOPCs; (2) in the HHRA to identify human health COPCs and COCs (Section 7.2); and (3) in the ERA to evaluate COPECs (Section 7.3). Figure 4-8 illustrates the screening process to identify SRCs and COPCs at Atlas Scrap Yard in accordance with the FWCUG Report. The steps involved in the SRC screening process are summarized below. All chemicals that were not eliminated during the screening steps were retained as SRCs.

- **Data Quality Assessment:** Discussed previously in Section J.4.5 of Appendix J.
- **Background Screening:** The maximum detected concentration (MDC) of inorganic chemicals was compared to RVAAP BSVs. If background concentrations were exceeded, the respective inorganic chemicals were retained as SRCs. No BSVs were established for organic chemicals. As such, all detected organic chemicals were retained as SRCs.
- **Screening of Essential Human Nutrients:** Chemicals that are considered essential nutrients (e.g., calcium, chloride, iodine, iron, magnesium, potassium, phosphorous, and sodium) are an integral part of the human food supply and are often added to foods as supplements. USEPA recommends these chemicals not be evaluated unless they are grossly elevated relative to background concentrations or would exhibit toxicity at the observed concentrations at an AOC (USEPA 1989). Recommended dietary allowance (RDA) and recommended daily intake (RDI) values are available for all of these chemicals (Table 4-18). Screening values were calculated for receptors ingesting 100 mg of soil per day or 1 liter of groundwater per day to meet their RDA/RDI. In the case of calcium, magnesium, phosphorous, potassium, and sodium, a receptor ingesting 100 mg of soil per day would receive less than the RDA/RDI value, even if the soil consisted of the pure mineral (i.e., soil concentrations at 1,000,000 mg/kg). Essential nutrients detected at or below their RDA/RDI-based screening levels were eliminated as SRCs.
- **Frequency of Detection/WOE Screening:** Chemicals that were never detected in a given medium were eliminated as SRCs. For subsurface chemicals with at least 20 discrete samples and a frequency of detection of less than 5%, a WOE approach was used to determine if the chemical is AOC-related. This screening was applied to all organic and inorganic chemicals with the exception of explosives and propellants; all detected explosives and propellants were considered as SRCs regardless of frequency of detection. At Atlas Scrap Yard, 20 discrete subsurface soil samples were available for frequency of detection/WOE screening; however, no SRCs were screened out on this basis. The frequency of detection/WOE screening was not applied to ISM samples.

4.4.3 Data Presentation

Data summary statistics and screening results for SRCs in surface soil, subsurface soil, sediment, and surface water at Atlas Scrap Yard are presented for each medium and spatial aggregate in Section 5. Analytical results for SRCs are also presented in data summary tables.

The complete laboratory analytical data packages are included in Appendix D. In order to maximize efficiency for laboratory reporting and data management activities, all samples received at the laboratory on a given day were reported in a single data package. Therefore, results may be present in

the data packages that are associated with different AOCs. All samples for Atlas Scrap Yard have sample identifications beginning with "ASY."

The tables in Appendix D present the analytical results for samples collected during the PBA08 RI and Characterization of 14 AOCs (MKM 2007). Analytical results are grouped by media (e.g., surface soil, surface water) and class of analytes (e.g., explosives, inorganic chemicals) for ease of reference.

4.4.4 Data Evaluation

As discussed in Section 4.2.1, surface soil and sediment samples were collected during the Characterization of 14 AOCs. The nature and extent evaluation for Atlas Scrap Yard includes an evaluation of sediment samples L12-308 and ASYsd-024M, which were sampled immediately downstream of the surface water discharge point on the other side of Paris-Windham Road, and adjacent to Load Line 12. Surface soil and subsurface soil samples at Atlas Scrap Yard were collected during the PBA08 RI. Additionally, four subsurface soil samples (two from both soil borings) were collected during the PBA08 RI for geotechnical analysis only. All available sample data were evaluated to determine suitability for use in the RI under two primary considerations: (1) representativeness with respect to current AOC conditions; and (2) sample collection methods (e.g., discrete vs. ISM). Table 4-19 presents the designated use for all available Atlas Scrap Yard samples as well as their aggregate assignments.

There was no available documentation of fill or soil brought onto Atlas Scrap Yard during building demolition prior to the Characterization of 14 AOCs. Samples from the 2004 dataset (Characterization of 14 AOCs) were evaluated to determine if conditions had changed substantively between earlier characterization efforts and the PBA08 RI activities. No historical surface samples were eliminated from evaluation on the basis of changed conditions at the AOC. However, surface soil samples at ASYss-001M, ASYss-003M, and ASYss-004M (including discrete sample ASYss-004D) were not included in the SRC screening dataset, as these ISM locations were re-sampled in 2010 under the PBA08 RI, and the more recent data were used for SRC screening.

In April 2011, an additional sampling event was conducted to refine contaminated areas in surface soil at the ASA, specifically grid ISM locations ASYss-088M, ASYss-089M, ASYss-093M and ASYss-094M. The 16 samples collected during this sampling event were included in the SRC screening dataset.

Since no subsurface soil samples were collected historically, the SRC dataset is comprised only of PBA08 RI samples. Sediment and surface water samples collected from the sanitary sewer system are not included in the evaluation within this report, as those samples are evaluated as part of the Facility-Wide Sewers AOC (designated as RVAAP-67). One co-located set of sediment and surface water samples (L12sd-308 and L12sw-308) were collected in the ditch east of Atlas Scrap Yard along Paris-Windham Road under the PBA08 RI for Load Line 12. These samples were incorporated into the Atlas Scrap Yard nature and extent evaluation to represent the potential exit point for runoff or surface drainage from the AOC.

Historical surface soil and sediment samples were collected using ISM sample methods only. Under the PBA08 RI, surface soil was sampled using discrete (i.e., chromium speciation and soil boring samples) and ISM methods. As presented in Table 4-20, only ISM sample locations were used in the SRC screening process for surface soil. All subsurface soil samples collected under the PBA08 RI were collected as discrete soil borings and screened for SRCs, as presented in Table 4-21. One historical sediment sample was collected east (downstream) of the AOC via ISM methods at the western boundary of Load Line 12 along the drainage ditch beneath Paris-Windham Road, and one PBA08 RI sample was collected at the same location via discrete sampling methods. The two sediment samples (i.e., ISM and discrete) were screened for SRCs separately due to the difference in collection methodologies. The two sediment SRC screens are presented in Tables 4-22 and 4-23. A co-located surface water sample was also collected using discrete methods under the PBA08 RI and was the only surface water sample available for use in the SRC screening process. Table 4-24 presents the SRC screen for surface water.

Table 4-1. Characterization of 14 AOCs Sampling Locations

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-001M	0.0–1.0	Metals and explosives	Reinforced Concrete Culvert (RCC) Pipes	Former staging area for RCC pipes, most likely from infrastructure demolition. Potentially residual sediment in pipes.	None	Metals
			Building T-4704 – Roads and Grounds Maintenance Building	Initial use as roads and grounds maintenance building. A 1956 figure (Plot Plan Roads and Grounds Maintenance Area) identifies this building as "Electrical Transmission Salv. Mat'l."	None	PCBs
ASYss-002M	0.0–0.5	Metals and explosives (PAHs assessed during PBA08 RI)	Railroad Ballast	North-central portion of AOC utilized as a portion of a former parking area and was subsequently used to store railroad ballast.	None	Metals, PAHs
ASYss-003M	0.0–1.0	Metals and explosives (PAHs assessed during PBA08 RI)	Railroad Ties	After the Vietnam War (1975), the north-central portion of Atlas Scrap Yard (i.e., ASA) became exclusively utilized as a stockpile storage area, including railroad ties.	None	Metals, PAHs
ASYss-004M	0.0–0.5	Metals, explosives, VOCs, pesticides, PCBs, and SVOCs	Concrete Rubble	After the Vietnam War (1975), the north-central portion of Atlas Scrap Yard (i.e., ASA) has been exclusively utilized as a stockpile storage area, including concrete footers/rubble.	None	Metals, PAHs

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-005M	0.0–0.5	Metals, explosives, VOCs (Investigation under CC sites included samples for PAHs, BTEX with MTBE, TPH GRO, TPH DRO, and TAL Metals. See Section 2.4.4.1)	Building T-22 - Service Station #1	Utilized as service station containing four former USTs. T-22 was razed by December 1944 and the materials salvaged for maintenance building construction.	None	Petroleum, lead (Petroleum assessed in Facility-wide UST investigation, see Section 2.4.4.1)
ASYss-006M	0.0–1.0	Metals and explosives	Water Tower	Elevated water tower (100,000 gal) utilized by the construction camp, Load Line 12 (Ammonium Nitrate Plant), and Load Line 4 during World War II, and continued use for roads and grounds buildings. Water tower was demolished between 1994 and 2004 (Google Earth aerial photos).	None	Metals
ASYss-007M	0.0–1.0	Metals and explosives (UST was closed and soil sample results had concentrations below BUSTR action levels. See Section 2.4.4.1.)	Building T-18 – Office Building	Utilized as an office building by Atlas Powder Company (Operating Contractor). T-18 remained at Atlas Scrap Yard after the 1944 construction camp demolition and was used for roads and ground equipment storage. A 1000-gal No. 2 fuel oil UST (RV-52) was installed on the western side of T-18 in 1941 and removed in 1990. T-18 was demolished in the 1960s, but UST remained and was used for storage purposes until 1987 (USACE 2011).	None	Petroleum, lead

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-008M	0.0–1.0	Metals, explosives	Building T-6 – Materials Testing Laboratory	Utilized as materials testing laboratory during World War II. T-6 was razed by December 1944.	None	Metals, explosives
ASYss-009M	0.0–1.0	Metals, explosives	Building T-5 – Field Hospital	Utilized as a field hospital during World War II until the main hospital opened in the Administration Area in 1943. T-5 was moved to the Administration Area by December 1944.	None	None
ASYss-010M	0.0–1.0	Metals and explosives (PAHs assessed during PBA08 RI)	Railroad Ballast	East-central portion of AOC utilized as a portion of a parking area and was subsequently used to store railroad ballast.	None	Metals, PAHs
ASYss-011M	0.0–1.0	Metals, explosives, SVOCs	Former Staging Area of 90mm Wooden Packing Boxes	Staging area for salvaged ammunition boxes from demilitarized Vietnam War munitions. Two parallel lines of 90mm packing boxes were identified in this area.	None	Explosives

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-012M	0.0–1.0	Metals and explosives (Contamination from AST was evaluated and closed under BUSTR)	Building T-15 - Service Station #2	Utilized as the southern service station containing an AST that has since been removed. However, information regarding capacity and use was not identified. T-15 was razed by December 1944.	None	Petroleum, lead
ASYss-013M	0.0–1.0	Metals, explosives, VOCs	Building T-19 – Fire Station	Utilized as a fire station during World War II. T-19 remained at Atlas Scrap Yard after the 1944 demolition and was used for roads and ground equipment storage. T-19 was demolished sometime after 1971.	None	Carbon tetrachloride
ASYss-014M	0.0–1.0	Metals, explosives	Building T-13 – Workmen's Sheds	Utilized as Workmen's Sheds during World War II. T-13 was razed by December 1944.	None	Unknown
ASYss-015M	0.0–1.0	Metals, explosives, VOCs, pesticides, PCBs, SVOCs	Building T-13 – Workmen's Sheds	Utilized as Workmen's Sheds during World War II. T-13 was razed by December 1944.	None	Unknown
ASYss-016M	0.0–1.0	Metals, explosives	Building T-13 – Workmen's Sheds	Utilized as Workmen's Sheds during World War II. T-13 was razed by December 1944.	None	Unknown
ASYss-017M	0.0–1.0	Metals, explosives	Building T-14 – Garage	Utilized as a garage for vehicle storage and potentially for maintenance. After 1944, T-14 was used for roads and ground equipment storage. T-14 was demolished sometime after 1971.	None	Petroleum, solvents

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-018M	0.0–1.0	Metals, explosives	Building T-16 – Blacksmith Shop	Utilized as a Blacksmith Shop during World War II. T-16 remained at Atlas Scrap Yard after the 1944 construction camp demolition and was used for roads and ground equipment storage. T-16 was demolished sometime after 1971.	None	Metals
ASYss-019M	0.0–1.0	Metals, explosives	Former Incinerator	Utilized as an incinerator at the construction camp. The brick structure associated with the incinerator is still present, but other components associated with the incinerator have been razed.	None documented. However, use as incinerator may have resulted in a release.	Metals
ASYss-020M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYss-021M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYss-022M	0.0–0.5	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-023M	0.0–0.5	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYsd-024M (classified as sediment)	0.0–1.0	Metals, explosives	Drainage Ditch to Load Line 12	Ditch that is downgradient of the main surface water discharge point of Atlas Scrap Yard after traversing through a culvert under Paris-Windham Road.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYss-025M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-026M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYss-027M	0.0–1.0	Metals, explosives, VOCs, pesticides, PCBs, and SVOCs	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAHs may be a potential contaminant from adjacent asphalt road.
ASYss-028M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None. PAH accumulation may have been from potential adjacent asphalt road.

Table 4–1. Characterization of 14 AOCs Sampling Locations (continued)

Characterization of 14 AOCs Sample Location	Sample Depth (ft bgs)	Analytes	Potential Sources or Areas for Investigation	Previous Use and/or Description	Documented Release	Potential Contaminants from Use
ASYss-029M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-030M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-031M	0.0–0.5	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-032M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-033M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.
ASYss-034M	0.0–1.0	Metals, explosives	Perimeter Drainage Ditches	Drainage ditches constructed along AOC roadways and main facility roads.	None	None.

AOC = Area of Concern.
ASA = Active storage area.
AST = Aboveground storage tank.
BTEX = benzene, toluene, ethylbenzene, and xylene.
BUSTR = Below underground storage tank regulation.
CC =
DRO = Diesel Range Organics
ft bgs = Feet below ground surface.
gal = Gallon.
GRO =
MBTE = methyl tertiary butyl ether.
mm = Millimeter.
PAH = Polycyclic aromatic hydrocarbon.
PBA 08 RI = Performance-Based Acquisition 2008 Remedial Investigation
PCB = Polychlorinated biphenyl.
SVOC = Semi-volatile organic compound.
TAL = Target analyte list.
TPH =
UST = Underground storage tank.
VOC = Volatile organic compound.

THIS PAGE INTENTIONALLY LEFT BLANK.

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples

Station			ASYss-001M	ASYss-002M	ASYss-003M	ASYss-004D	ASYss-004M	ASYss-005D	ASYss-005M	ASYss-006M	ASYss-007M
Sample ID			ASYss-001M-SO	ASYss-002M-SO	ASYss-003M-SO	ASYss-004D-SO	ASYss-004M-SO	ASYss-005D-SO	ASYss-005M-SO	ASYss-006M-SO	ASYss-007M-DUP
Date			11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04
Depth (ft)			0.0 - 1.0	0.0 - 0.5	0.0 - 1.0	0.0 - 0.5	0.0 - 0.5	0.0 - 1.0	0.0 - 0.5	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	Volatile Organics	RVAAP Full Suite	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Metals											
Aluminum	7429-90-5	17700	24000 *	17000	22000 *	NR	15000	NR	14000	19000 *	12000
Arsenic	7440-38-2	15.4	5.9	8.9	6.5	NR	11	NR	6.3	6.8	9.1
Barium	7440-39-3	88.4	290 *	180 *	230 *	NR	140 *	NR	130 *	240 *	97 *
Beryllium	7440-41-7	0.88	4.3 *	3.2 *	4.5 *	NR	1.9 *	NR	1.6 *	3.7 *	1 *
Cadmium	7440-43-9	0	0.64 *	0.17 *	0.3 *	NR	0.24 *	NR	0.3 *	0.43 *	0.45 *
Calcium	7440-70-2	15800	91000 *	67000 *	140000 *	NR	50000 *	NR	32000 *	86000 *	15000
Chromium	7440-47-3	17.4	17	23 *	19 *	NR	20 *	NR	13	28 *	16
Cobalt	7440-48-4	10.4	3.3	4.7	3.4	NR	6.2	NR	4	2.8	7.6
Copper	7440-50-8	17.7	13	16	15	NR	38 *	NR	8.6	13	15
Iron	7439-89-6	23100	11000	18000	12000	NR	17000	NR	13000	12000	18000
Lead	7439-92-1	26.1	43 *	14	16	NR	28 *	NR	23	150 *	49 *
Magnesium	7439-95-4	3030	14000 *	10000 *	14000 *	NR	7100 *	NR	5300 *	13000 *	3300 *
Manganese	7439-96-5	1450	3500 *	1400	3100 *	NR	1300	NR	1000	2200 *	760
Mercury	7439-97-6	0.036	0.05 *	0.04 *	0.02	NR	0.05 *	NR	0.06 *	0.05 *	0.05 *
Nickel	7440-02-0	21.1	9.4	17	11	NR	17	NR	8.8	11	14
Potassium	7440-09-7	927	2300 *	1800 *	2200 *	NR	1600 *	NR	1300 *	1800 *	1200 *
Selenium	7782-49-2	1.4	1.8 *	0.63	1.6 *	NR	<1.6 U	NR	0.72	1.1	0.6
Silver	7440-22-4	0	<1.1 U	<1.1 U	<1 U	NR	<1 U	NR	<0.97 U	<1.1 U	<1 U
Sodium	7440-23-5	123	930 *	780 *	1000 *	NR	530 *	NR	410 *	990 *	360 *
Thallium	7440-28-0	0	<0.64 U	<0.63 U	<0.53 U	NR	<0.65 U	NR	<0.64 U	<0.67 U	<0.64 U
Vanadium	7440-62-2	31.1	11	14	12	NR	16	NR	15	13	19
Zinc	7440-66-6	61.8	180 *	43	43	NR	64 *	NR	52	88 *	110 *
Explosives											
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	0.05 J*	<0.99 U	0.07 J*	NR	0.29 J*	NR	<0.2 U	<0.2 U	<0.2 U
2-Nitrotoluene	88-72-2	None	<0.2 U	<0.99 U	<0.2 U	NR	<1 U	NR	<0.2 U	<0.2 U	<0.2 U
3-Nitrotoluene	99-08-1	None	<0.2 U	<0.99 U	<0.2 U	NR	<1 U	NR	<0.2 U	0.09 J*	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR	NR	NR	1.7 *	NR	NR	NR	NR
SVOCs											
2-Methylnaphthalene	91-57-6	None	NR	NR	NR	NR	0.38 *	NR	NR	NR	NR
4-Methylphenol	106-44-5	None	NR	NR	NR	NR	0.016 J*	NR	NR	NR	NR
Acenaphthene	83-32-9	None	NR	NR	NR	NR	0.18 *	NR	NR	NR	NR
Acenaphthylene	208-96-8	None	NR	NR	NR	NR	0.26 *	NR	NR	NR	NR
Anthracene	120-12-7	None	NR	NR	NR	NR	0.84 *	NR	NR	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR	NR	NR	2.9 *	NR	NR	NR	NR

Table 4–2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-001M	ASYss-002M	ASYss-003M	ASYss-004D	ASYss-004M	ASYss-005D	ASYss-005M	ASYss-006M	ASYss-007M
Sample ID			ASYss-001M-SO	ASYss-002M-SO	ASYss-003M-SO	ASYss-004D-SO	ASYss-004M-SO	ASYss-005D-SO	ASYss-005M-SO	ASYss-006M-SO	ASYss-007M-DUP
Date			11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04	11/04/04
Depth (ft)			0.0 - 1.0	0.0 - 0.5	0.0 - 1.0	0.0 - 0.5	0.0 - 0.5	0.0 - 1.0	0.0 - 0.5	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		Background	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	Volatile Organics	RVAAP Full Suite	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)	CAS Number	Criteria									
Benzenemethanol	100-51-6	None	NR	NR	NR	NR	<0.69 U	NR	NR	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR	NR	NR	3.2 *	NR	NR	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR	NR	NR	5.2 *	NR	NR	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR	NR	NR	2.1 *	NR	NR	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR	NR	NR	2.2 *	NR	NR	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR	NR	NR	<0.17 U	NR	NR	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR	NR	NR	<0.069 U	NR	NR	NR	NR
Carbazole	86-74-8	None	NR	NR	NR	NR	<0.17 U	NR	NR	NR	NR
Chrysene	218-01-9	None	NR	NR	NR	NR	3.4 *	NR	NR	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR	NR	NR	0.75 *	NR	NR	NR	NR
Dibenzofuran	132-64-9	None	NR	NR	NR	NR	0.14 *	NR	NR	NR	NR
Fluoranthene	206-44-0	None	NR	NR	NR	NR	4.2 *	NR	NR	NR	NR
Fluorene	86-73-7	None	NR	NR	NR	NR	0.13 *	NR	NR	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR	NR	NR	1.7 *	NR	NR	NR	NR
Naphthalene	91-20-3	None	NR	NR	NR	NR	0.31 *	NR	NR	NR	NR
Phenanthrene	85-01-8	None	NR	NR	NR	NR	1.1 *	NR	NR	NR	NR
Phenol	108-95-2	None	NR	NR	NR	NR	<0.17 U	NR	NR	NR	NR
Pyrene	129-00-0	None	NR	NR	NR	NR	4.5 *	NR	NR	NR	NR
Pesticides/PCBs											
PCB-1260	11096-82-5	None	NR	NR	NR	NR	0.054 *	NR	NR	NR	NR
VOCs											
Acetone	67-64-1	None	NR	NR	NR	<0.019 U	NR	<0.021 U	NR	NR	NR

Table 4–2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-007M	ASYss-008M	ASYss-009M	ASYss-010M	ASYss-011M	ASYss-012D	ASYss-012D	ASYss-012M	ASYss-012M
Sample ID			ASYss-007M-SO	ASYss-008M-SO	ASYss-009M-SO	ASYss-010M-SO	ASYss-011M-SO	ASYss-012D-QA	ASYss-012D-SO	ASYss-012M-SO	ASYss-012M-QA
Date			11/04/04	11/04/04	11/04/04	11/03/04	11/03/04	11/04/04	11/04/04	11/04/04	11/04/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	RVAAP Full Suite	Volatile Organics	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Metals											
Aluminum	7429-90-5	17700	11000	16000	8100	13000	15000	NR	NR	13000	15000
Arsenic	7440-38-2	15.4	9.8	10	7.3	6.9	4.8	NR	NR	5.2	5
Barium	7440-39-3	88.4	100 *	180 *	51	93 *	95 *	NR	NR	110 *	120 *
Beryllium	7440-41-7	0.88	0.98 *	2.5 *	0.54	1 *	1.1 *	NR	NR	1.5 *	1.8 *
Cadmium	7440-43-9	0	0.3 *	1.8 *	0.41 *	<0.27 U	0.09 *	NR	NR	0.32 *	0.29 *
Calcium	7440-70-2	15800	16000 *	53000 *	6300	13000	17000 *	NR	NR	39000 *	43000 *
Chromium	7440-47-3	17.4	14	22 *	12	20 *	18 *	NR	NR	13	15
Cobalt	7440-48-4	10.4	7	5.9	3.9	7.6	4.2	NR	NR	2.1	2
Copper	7440-50-8	17.7	15	33 *	17	8.8	11	NR	NR	8.5	9.5
Iron	7439-89-6	23100	17000	28000 *	14000	17000	14000	NR	NR	11000	9900
Lead	7439-92-1	26.1	49 *	69 *	19	26	22	NR	NR	31 *	31 *
Magnesium	7439-95-4	3030	3000 J	8400 *	1900	3400 *	3800 *	NR	NR	5400 *	6400 *
Manganese	7439-96-5	1450	760	1400	250	730	520	NR	NR	700	760
Mercury	7439-97-6	0.036	0.06 *	0.09 *	<0.05 U	0.1 *	0.28 *	NR	NR	0.07 *	0.06 *
Nickel	7440-02-0	21.1	13	17	11	14	12	NR	NR	7.2	7.8
Potassium	7440-09-7	927	1000 J*	1600 *	950 *	1200 *	1100 *	NR	NR	1300 *	1300 *
Selenium	7782-49-2	1.4	<1.5 U	1.2	0.76	<1.6 U	<1.6 U	NR	NR	0.89	1.1
Silver	7440-22-4	0	<0.99 U	<1 U	<1.1 U	0.76 *	<1 U	NR	NR	4.8 *	3.2 *
Sodium	7440-23-5	123	320 *	710 *	250 *	390 *	370 *	NR	NR	570 *	660 *
Thallium	7440-28-0	0	<0.55 U	<0.61 U	<0.6 U	<0.67 U	<0.66 U	NR	NR	0.24 *	<0.52 U
Vanadium	7440-62-2	31.1	17	15	15	20	20	NR	NR	13	12
Zinc	7440-66-6	61.8	100 *	200 *	210 *	100 *	98 *	NR	NR	60	63 *
Explosives											
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	NR	NR	<0.2 U	<0.2 U
2-Nitrotoluene	88-72-2	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	NR	NR	<0.2 U	<0.2 U
3-Nitrotoluene	99-08-1	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	NR	NR	<0.2 U	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
SVOCs											
2-Methylnaphthalene	91-57-6	None	NR	NR	NR	NR	0.033 J*	NR	NR	NR	NR
4-Methylphenol	106-44-5	None	NR	NR	NR	NR	0.015 J*	NR	NR	NR	NR
Acenaphthene	83-32-9	None	NR	NR	NR	NR	<0.035 U	NR	NR	NR	NR
Acenaphthylene	208-96-8	None	NR	NR	NR	NR	<0.035 U	NR	NR	NR	NR
Anthracene	120-12-7	None	NR	NR	NR	NR	0.012 J*	NR	NR	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR	NR	NR	0.073 *	NR	NR	NR	NR

Table 4–2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-007M	ASYss-008M	ASYss-009M	ASYss-010M	ASYss-011M	ASYss-012D	ASYss-012D	ASYss-012M	ASYss-012M
Sample ID			ASYss-007M-SO	ASYss-008M-SO	ASYss-009M-SO	ASYss-010M-SO	ASYss-011M-SO	ASYss-012D-QA	ASYss-012D-SO	ASYss-012M-SO	ASYss-012M-QA
Date			11/04/04	11/04/04	11/04/04	11/03/04	11/03/04	11/04/04	11/04/04	11/04/04	11/04/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	RVAAP Full Suite	Volatile Organics	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Benzenemethanol	100-51-6	None	NR	NR	NR	NR	<0.72 U	NR	NR	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR	NR	NR	0.1 *	NR	NR	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR	NR	NR	0.12 *	NR	NR	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR	NR	NR	0.079 *	NR	NR	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR	NR	NR	0.079 *	NR	NR	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR	NR	NR	1.5 *	NR	NR	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR	NR	NR	0.24 *	NR	NR	NR	NR
Carbazole	86-74-8	None	NR	NR	NR	NR	<0.18 U	NR	NR	NR	NR
Chrysene	218-01-9	None	NR	NR	NR	NR	0.12 *	NR	NR	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR	NR	NR	<0.035 U	NR	NR	NR	NR
Dibenzofuran	132-64-9	None	NR	NR	NR	NR	<0.072 U	NR	NR	NR	NR
Fluoranthene	206-44-0	None	NR	NR	NR	NR	0.12 *	NR	NR	NR	NR
Fluorene	86-73-7	None	NR	NR	NR	NR	<0.035 U	NR	NR	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR	NR	NR	0.068 *	NR	NR	NR	NR
Naphthalene	91-20-3	None	NR	NR	NR	NR	0.028 J*	NR	NR	NR	NR
Phenanthrene	85-01-8	None	NR	NR	NR	NR	0.059 *	NR	NR	NR	NR
Phenol	108-95-2	None	NR	NR	NR	NR	0.0083 J*	NR	NR	NR	NR
Pyrene	129-00-0	None	NR	NR	NR	NR	0.14 *	NR	NR	NR	NR
Pesticide/PCBs											
PCB-1260	11096-82-5	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
VOCs											
Acetone	67-64-1	None	NR	NR	NR	NR	NR	<0.018 U	<0.018 U	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-013D	ASYss-013M	ASYss-014M	ASYss-015D	ASYss-015M	ASYss-016M	ASYss-017M	ASYss-017M	ASYss-018M
Sample ID			ASYss-013D-SO	ASYss-013M-SO	ASYss-014M-SO	ASYss-015D-SO	ASYss-015M-SO	ASYss-016M-SO	ASYss-017M-DUP	ASYss-017M-SO	ASYss-018M-SO
Date			11/03/04	11/03/04	11/04/04	11/04/04	11/04/04	11/03/04	11/03/04	11/03/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives	Volatile Organics	RVAAP Full Suite	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Metals											
Aluminum	7429-90-5	17700	NR	20000 *	13000	NR	13000	14000	14000	13000	13000
Arsenic	7440-38-2	15.4	NR	10	9.2	NR	9.4	9.5	23 *	22 *	41 *
Barium	7440-39-3	88.4	NR	210 *	81	NR	79	92 *	180 *	160 *	180 *
Beryllium	7440-41-7	0.88	NR	3.7 *	0.84	NR	0.8	0.93 *	2.7 *	2.5 *	2.1 *
Cadmium	7440-43-9	0	NR	0.84 *	0.14 *	NR	0.15 *	<0.26 U	0.89 *	0.88 *	1.4 *
Calcium	7440-70-2	15800	NR	83000 *	9200 J	NR	11000	13000	80000 *	83000 *	88000 *
Chromium	7440-47-3	17.4	NR	34 *	16	NR	18 *	19 *	22 *	23 *	29 *
Cobalt	7440-48-4	10.4	NR	4	6.8	NR	6.1	5.1	3.5	3.4	4.5
Copper	7440-50-8	17.7	NR	25 *	14	NR	12	12	33 *	32 *	44 *
Iron	7439-89-6	23100	NR	14000	18000	NR	20000	18000	16000	16000	19000
Lead	7439-92-1	26.1	NR	97 *	26	NR	28 *	34 *	110 *	110 *	160 *
Magnesium	7439-95-4	3030	NR	12000 *	2800	NR	2900	3300 *	8500 *	8000 *	7400 *
Manganese	7439-96-5	1450	NR	1900 *	710	NR	360	450	1300	1300	1300
Mercury	7439-97-6	0.036	NR	0.03	0.05 *	NR	0.07 *	0.05 *	0.07 *	0.09 *	0.39 *
Nickel	7440-02-0	21.1	NR	18	12	NR	13	14	15	16	20
Potassium	7440-09-7	927	NR	1900 *	890 J	NR	1000 *	1200 *	1600 *	1400 *	1500 *
Selenium	7782-49-2	1.4	NR	0.98	0.84	NR	0.55	<1.6 U	1.4	1.3	0.72
Silver	7440-22-4	0	NR	<1 U	<1.1 U	NR	<1 U	<1.1 U	<1 U	<0.98 U	5.2 *
Sodium	7440-23-5	123	NR	880 *	340 *	NR	330 *	360 *	720 *	680 *	580 *
Thallium	7440-28-0	0	NR	<0.65 U	<0.61 U	NR	<0.53 U	<0.64 U	0.24 *	<0.58 U	0.35 *
Vanadium	7440-62-2	31.1	NR	12	21	NR	22	21	11	10	12
Zinc	7440-66-6	61.8	NR	120 *	65 *	NR	66 *	61	130 *	120 *	200 *
Explosives											
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	NR	0.09 J*	<0.2 U	NR	<0.2 U	<0.2 U	<1 U	<0.99 U	0.1 J*
2-Nitrotoluene	88-72-2	None	NR	0.24 *	<0.2 U	NR	<0.2 U	<0.2 U	<1 U	<0.99 U	0.43 *
3-Nitrotoluene	99-08-1	None	NR	<0.2 U	<0.2 U	NR	<0.2 U	<0.2 U	<1 U	<0.99 U	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR	NR	NR	<2 U	NR	NR	NR	NR
SVOCs											
2-Methylnaphthalene	91-57-6	None	NR	NR	NR	NR	0.029 J*	NR	NR	NR	NR
4-Methylphenol	106-44-5	None	NR	NR	NR	NR	<0.067 UJ	NR	NR	NR	NR
Acenaphthene	83-32-9	None	NR	NR	NR	NR	0.056 J*	NR	NR	NR	NR
Acenaphthylene	208-96-8	None	NR	NR	NR	NR	0.024 J*	NR	NR	NR	NR
Anthracene	120-12-7	None	NR	NR	NR	NR	0.18 J*	NR	NR	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR	NR	NR	0.79 J*	NR	NR	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-013D	ASYss-013M	ASYss-014M	ASYss-015D	ASYss-015M	ASYss-016M	ASYss-017M	ASYss-017M	ASYss-018M
Sample ID			ASYss-013D-SO	ASYss-013M-SO	ASYss-014M-SO	ASYss-015D-SO	ASYss-015M-SO	ASYss-016M-SO	ASYss-017M-DUP	ASYss-017M-SO	ASYss-018M-SO
Date			11/03/04	11/03/04	11/04/04	11/04/04	11/04/04	11/03/04	11/03/04	11/03/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	Volatile Organics	TAL Metals, Explosives	TAL Metals, Explosives	Volatile Organics	RVAAP Full Suite	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Benzenemethanol	100-51-6	None	NR	NR	NR	NR	0.25 J*	NR	NR	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR	NR	NR	1.1 J*	NR	NR	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR	NR	NR	1.2 J*	NR	NR	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR	NR	NR	1 J*	NR	NR	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR	NR	NR	0.64 J*	NR	NR	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR	NR	NR	0.064 J*	NR	NR	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR	NR	NR	<0.067 UJ	NR	NR	NR	NR
Carbazole	86-74-8	None	NR	NR	NR	NR	0.15 J*	NR	NR	NR	NR
Chrysene	218-01-9	None	NR	NR	NR	NR	0.73 J*	NR	NR	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR	NR	NR	0.26 J*	NR	NR	NR	NR
Dibenzofuran	132-64-9	None	NR	NR	NR	NR	0.038 J*	NR	NR	NR	NR
Fluoranthene	206-44-0	None	NR	NR	NR	NR	1.4 J*	NR	NR	NR	NR
Fluorene	86-73-7	None	NR	NR	NR	NR	0.05 J*	NR	NR	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR	NR	NR	0.82 J*	NR	NR	NR	NR
Naphthalene	91-20-3	None	NR	NR	NR	NR	0.031 J*	NR	NR	NR	NR
Phenanthrene	85-01-8	None	NR	NR	NR	NR	0.61 J*	NR	NR	NR	NR
Phenol	108-95-2	None	NR	NR	NR	NR	0.031 J*	NR	NR	NR	NR
Pyrene	129-00-0	None	NR	NR	NR	NR	1.3 J*	NR	NR	NR	NR
Pesticide/PCBs											
PCB-1260	11096-82-5	None	NR	NR	NR	NR	<0.033 U	NR	NR	NR	NR
VOCs											
Acetone	67-64-1	None	<0.02 U	NR	NR	<0.019 U	NR	NR	NR	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-019M	ASYss-020M	ASYss-021M	ASYss-021M	ASYss-022M	ASYss-022M	ASYss-023M	ASYss-025M	ASYss-026M
Sample ID			ASYss-019M-SO	ASYss-020M-SO	ASYss-021M-DUP	ASYss-021M-SO	ASYss-022M-QA	ASYss-022M-SO	ASYss-023M-SO	ASYss-025M-SO	ASYss-026M-SO
Date			11/10/04	11/03/04	11/03/04	11/03/04	11/11/04	11/12/04	11/11/04	11/11/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 0.5	0.0 - 0.5	0.0 - 0.5	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Metals											
Aluminum	7429-90-5	17700	11000	14000	15000	15000	14000	15000	13000	14000	13000
Arsenic	7440-38-2	15.4	11	11	15	13	12	14	11	12	7.8
Barium	7440-39-3	88.4	280 *	110 *	84	87	96 *	87	99 *	94 *	74
Beryllium	7440-41-7	0.88	0.71	1.3 *	1.1 *	1 *	1.1 *	0.91 *	0.93 *	0.7	0.73
Cadmium	7440-43-9	0	9.5 *	0.1 *	<0.25 U	0.19 *	0.23 *	0.24 *	0.11 *	<0.25 U	<0.24 U
Calcium	7440-70-2	15800	4800	21000 *	6900	6900	8700	4000	6200	1300	2700
Chromium	7440-47-3	17.4	64 *	22 *	22 *	22 *	19 *	23 *	22 *	21 *	23 *
Cobalt	7440-48-4	10.4	5.7	6.4	13 *	13 *	10	12 *	7.4	9.1	6.4
Copper	7440-50-8	17.7	200 *	13	19 *	20 *	17	20 *	17	12	13
Iron	7439-89-6	23100	27000 *	23000	28000 *	27000 *	26000 *	27000 *	21000	23000	21000
Lead	7439-92-1	26.1	1200 *	24	18	17	20	15	20	19	14
Magnesium	7439-95-4	3030	1800	3700 *	3300 *	3300 *	3300 *	3300 *	2400	2600	2100
Manganese	7439-96-5	1450	470	580	470	450	700	570	330	730	220
Mercury	7439-97-6	0.036	0.64 *	0.04 *	<0.02 U	<0.02 U	0.04 *	0.03	<0.03 U	0.07 *	<0.04 U
Nickel	7440-02-0	21.1	22 *	18	23 *	23 *	19	23 *	21	19	17
Potassium	7440-09-7	927	1200 *	1800 *	1500 *	1600 *	1500 *	1700 *	1000 *	1200 *	1400 *
Selenium	7782-49-2	1.4	0.99	0.74	0.79	<1.6 U	0.83	0.53	1.2	0.94	0.69
Silver	7440-22-4	0	0.62 *	<1 U	<1 U	<1.1 U	<0.98 U	<0.96 U	<1 U	<1 U	<0.94 U
Sodium	7440-23-5	123	950 *	440 *	390 *	400 *	390 *	370 *	360 *	350 *	340 *
Thallium	7440-28-0	0	<0.64 U	<0.63 U	<0.62 U	0.25 *	0.21 *	<0.56 U	<0.59 U	<0.6 U	<0.59 U
Vanadium	7440-62-2	31.1	19	20	24	23	25	25	19	25	21
Zinc	7440-66-6	61.8	1800 *	130 *	66 *	64 *	69 *	69 *	65 *	83 *	64 *
Explosives											
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
2-Nitrotoluene	88-72-2	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
3-Nitrotoluene	99-08-1	None	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
SVOCs											
2-Methylnaphthalene	91-57-6	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
4-Methylphenol	106-44-5	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Acenaphthene	83-32-9	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Acenaphthylene	208-96-8	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Anthracene	120-12-7	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR	NR	NR	NR	NR	NR	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-019M	ASYss-020M	ASYss-021M	ASYss-021M	ASYss-022M	ASYss-022M	ASYss-023M	ASYss-025M	ASYss-026M
Sample ID			ASYss-019M-SO	ASYss-020M-SO	ASYss-021M-DUP	ASYss-021M-SO	ASYss-022M-QA	ASYss-022M-SO	ASYss-023M-SO	ASYss-025M-SO	ASYss-026M-SO
Date			11/10/04	11/03/04	11/03/04	11/03/04	11/11/04	11/12/04	11/11/04	11/11/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 0.5	0.0 - 0.5	0.0 - 0.5	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Benzenemethanol	100-51-6	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Carbazole	86-74-8	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Chrysene	218-01-9	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Dibenzofuran	132-64-9	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Fluoranthene	206-44-0	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Fluorene	86-73-7	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Naphthalene	91-20-3	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Phenanthrene	85-01-8	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Phenol	108-95-2	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Pyrene	129-00-0	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
Pesticides/PCBs											
PCB-1260	11096-82-5	None	NR	NR	NR	NR	NR	NR	NR	NR	NR
VOCs											
Acetone	67-64-1	None	NR	NR	NR	NR	NR	NR	NR	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-027D	ASYss-027D	ASYss-027M	ASYss-027M	ASYss-028M	ASYss-029M	ASYss-030M	ASYss-031M	ASYss-032M
Sample ID			ASYss-027D-DUP	ASYss-027D-SO	ASYss-027M-DUP	ASYss-027M-SO	ASYss-028M-SO	ASYss-029M-SO	ASYss-030M-SO	ASYss-031M-SO	ASYss-032M-SO
Date			11/03/04	11/03/04	11/03/04	11/03/04	11/03/04	11/11/04	11/10/04	11/10/04	11/02/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 0.5	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	Volatile Organics	Volatile Organics	RVAAP Full Suite	RVAAP Full Suite	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Metals											
Aluminum	7429-90-5	17700	NR	NR	13000	13000	13000	13000	14000	14000	16000
Arsenic	7440-38-2	15.4	NR	NR	11	11	13	9.2	10	12	11
Barium	7440-39-3	88.4	NR	NR	80	83	86	83	110 *	130 *	120 *
Beryllium	7440-41-7	0.88	NR	NR	0.87	0.9 *	0.82	0.68	0.96 *	1.2 *	1.3 *
Cadmium	7440-43-9	0	NR	NR	0.13 *	0.11 *	<0.24 U	<0.24 U	0.47 *	1.4 *	1.3 *
Calcium	7440-70-2	15800	NR	NR	2900	3000	2900	910	1400	2800	3100
Chromium	7440-47-3	17.4	NR	NR	24 *	22 *	20 *	18 *	19 *	18 *	19 *
Cobalt	7440-48-4	10.4	NR	NR	9.4	9.3	10	4.8	5.8	16 *	19 *
Copper	7440-50-8	17.7	NR	NR	19 *	20 *	20 *	9.7	17	31 *	25 *
Iron	7439-89-6	23100	NR	NR	24000 *	25000 *	26000 *	21000	21000	22000	27000 *
Lead	7439-92-1	26.1	NR	NR	15	15	18	20	38 *	41 *	33 *
Magnesium	7439-95-4	3030	NR	NR	2500	2500	2900	1400	1700	2000	2400
Manganese	7439-96-5	1450	NR	NR	360	340	340	95	160	940	1700 *
Mercury	7439-97-6	0.036	NR	NR	<0.03 U	<0.03 U	0.03	0.07 *	0.08 *	0.08 *	0.07 *
Nickel	7440-02-0	21.1	NR	NR	22 *	23 *	26 *	13	15	25 *	31 *
Potassium	7440-09-7	927	NR	NR	1400 *	1400 *	1600 *	1200 *	1200 *	1200 *	1400 *
Selenium	7782-49-2	1.4	NR	NR	0.68	0.83	<1.4 U	0.93	0.46	1	<2.3 U
Silver	7440-22-4	0	NR	NR	<0.96 U	<0.97 U	<0.96 U	<0.98 U	<0.94 U	<0.97 U	<1.6 U
Sodium	7440-23-5	123	NR	NR	350 *	370 *	380 *	340 *	320 *	320 *	370 *
Thallium	7440-28-0	0	NR	NR	<0.61 U	<0.59 U	<0.61 U	<0.59 U	<0.6 U	0.26 *	<0.89 U
Vanadium	7440-62-2	31.1	NR	NR	21	22	21	22	22	22	26
Zinc	7440-66-6	61.8	NR	NR	74 *	75 *	110 *	56	82 *	220 *	260 *
Explosives											
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	NR	NR	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
2-Nitrotoluene	88-72-2	None	NR	NR	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
3-Nitrotoluene	99-08-1	None	NR	NR	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR	1.2 *	1 *	NR	NR	NR	NR	NR
SVOCs											
2-Methylnaphthalene	91-57-6	None	NR	NR	0.013 J*	0.012 J*	NR	NR	NR	NR	NR
4-Methylphenol	106-44-5	None	NR	NR	<0.066 U	<0.069 U	NR	NR	NR	NR	NR
Acenaphthene	83-32-9	None	NR	NR	0.018 J*	0.018 J*	NR	NR	NR	NR	NR
Acenaphthylene	208-96-8	None	NR	NR	0.016 J*	0.013 J*	NR	NR	NR	NR	NR
Anthracene	120-12-7	None	NR	NR	0.058 *	0.048 *	NR	NR	NR	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR	0.33 *	0.29 *	NR	NR	NR	NR	NR

Table 4-2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-027D	ASYss-027D	ASYss-027M	ASYss-027M	ASYss-028M	ASYss-029M	ASYss-030M	ASYss-031M	ASYss-032M
Sample ID			ASYss-027D-DUP	ASYss-027D-SO	ASYss-027M-DUP	ASYss-027M-SO	ASYss-028M-SO	ASYss-029M-SO	ASYss-030M-SO	ASYss-031M-SO	ASYss-032M-SO
Date			11/03/04	11/03/04	11/03/04	11/03/04	11/03/04	11/11/04	11/10/04	11/10/04	11/02/04
Depth (ft)			0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 0.5	0.0 - 1.0
Parameters Analyzed	CAS Number	Background Criteria	Volatile Organics	Volatile Organics	RVAAP Full Suite	RVAAP Full Suite	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)											
Benzenemethanol	100-51-6	None	NR	NR	<0.66 U	<0.69 U	NR	NR	NR	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR	0.37 *	0.32 *	NR	NR	NR	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR	0.5 *	0.45 *	NR	NR	NR	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR	0.31 *	0.23 *	NR	NR	NR	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR	0.21 *	0.16 *	NR	NR	NR	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR	<0.16 U	<0.17 U	NR	NR	NR	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR	<0.066 U	<0.069 U	NR	NR	NR	NR	NR
Carbazole	86-74-8	None	NR	NR	<0.16 U	<0.17 U	NR	NR	NR	NR	NR
Chrysene	218-01-9	None	NR	NR	0.37 *	0.33 *	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR	0.07 *	0.052 *	NR	NR	NR	NR	NR
Dibenzofuran	132-64-9	None	NR	NR	0.012 J*	0.011 J*	NR	NR	NR	NR	NR
Fluoranthene	206-44-0	None	NR	NR	0.64 *	0.59 *	NR	NR	NR	NR	NR
Fluorene	86-73-7	None	NR	NR	0.021 J*	0.018 J*	NR	NR	NR	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR	0.23 *	0.18 *	NR	NR	NR	NR	NR
Naphthalene	91-20-3	None	NR	NR	0.015 J*	0.013 J*	NR	NR	NR	NR	NR
Phenanthrene	85-01-8	None	NR	NR	0.22 *	0.21 *	NR	NR	NR	NR	NR
Phenol	108-95-2	None	NR	NR	<0.16 U	<0.17 U	NR	NR	NR	NR	NR
Pyrene	129-00-0	None	NR	NR	0.6 *	0.55 *	NR	NR	NR	NR	NR
Pesticide/PCB											
PCB-1260	11096-82-5	None	NR	NR	<0.034 U	<0.034 U	NR	NR	NR	NR	NR
VOCs											
Acetone	67-64-1	None	0.011 J*	0.022 *	NR	NR	NR	NR	NR	NR	NR

Table 4–2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-033M	ASYss-034M
Sample ID			ASYss-033M-SO	ASYss-034M-SO
Date			11/03/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 0.5
Parameters Analyzed			TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)	CAS Number	Background Criteria		
Metals				
Aluminum	7429-90-5	17700	15000	12000
Arsenic	7440-38-2	15.4	8.4	5.5
Barium	7440-39-3	88.4	94 *	66
Beryllium	7440-41-7	0.88	0.81	0.62
Cadmium	7440-43-9	0	0.91 *	<0.28 U
Calcium	7440-70-2	15800	3800	1700
Chromium	7440-47-3	17.4	21 *	20 *
Cobalt	7440-48-4	10.4	8.7	7
Copper	7440-50-8	17.7	20 *	8
Iron	7439-89-6	23100	20000	16000
Lead	7439-92-1	26.1	43 *	16
Magnesium	7439-95-4	3030	2300	1900
Manganese	7439-96-5	1450	570	440
Mercury	7439-97-6	0.036	0.1 *	0.04 *
Nickel	7440-02-0	21.1	23 *	17
Potassium	7440-09-7	927	1300 *	970 *
Selenium	7782-49-2	1.4	0.68	<1.7 U
Silver	7440-22-4	0	<1 U	<1.1 U
Sodium	7440-23-5	123	340 *	280 *
Thallium	7440-28-0	0	<0.63 U	<0.67 U
Vanadium	7440-62-2	31.1	22	22
Zinc	7440-66-6	61.8	140 *	68 *
Explosives				
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	<0.2 U	<0.2 U
2-Nitrotoluene	88-72-2	None	<0.2 U	<0.2 U
3-Nitrotoluene	99-08-1	None	<0.2 U	<0.2 U
Nitrocellulose	9004-70-0	None	NR	NR
SVOCs				
2-Methylnaphthalene	91-57-6	None	NR	NR
4-Methylphenol	106-44-5	None	NR	NR
Acenaphthene	83-32-9	None	NR	NR
Acenaphthylene	208-96-8	None	NR	NR
Anthracene	120-12-7	None	NR	NR
Benz(a)anthracene	56-55-3	None	NR	NR

Table 4–2. Analytes Detected in Characterization of 14 AOCs Surface Soil Samples (continued)

Station			ASYss-033M	ASYss-034M
Sample ID			ASYss-033M-SO	ASYss-034M-SO
Date			11/03/04	11/03/04
Depth (ft)			0.0 - 1.0	0.0 - 0.5
Parameters Analyzed			TAL Metals, Explosives	TAL Metals, Explosives
Analyte (mg/kg)	CAS Number	Background Criteria		
Benzenemethanol	100-51-6	None	NR	NR
Benzo(a)pyrene	50-32-8	None	NR	NR
Benzo(b)fluoranthene	205-99-2	None	NR	NR
Benzo(ghi)perylene	191-24-2	None	NR	NR
Benzo(k)fluoranthene	207-08-9	None	NR	NR
Bis(2-ethylhexyl)phthalate	117-81-7	None	NR	NR
Butyl benzyl phthalate	85-68-7	None	NR	NR
Carbazole	86-74-8	None	NR	NR
Chrysene	218-01-9	None	NR	NR
Dibenz(a,h)anthracene	53-70-3	None	NR	NR
Dibenzofuran	132-64-9	None	NR	NR
Fluoranthene	206-44-0	None	NR	NR
Fluorene	86-73-7	None	NR	NR
Indeno(1,2,3-cd)pyrene	193-39-5	None	NR	NR
Naphthalene	91-20-3	None	NR	NR
Phenanthrene	85-01-8	None	NR	NR
Phenol	108-95-2	None	NR	NR
Pyrene	129-00-0	None	NR	NR
Pesticides/PCBs				
PCB-1260	11096-82-5	None	NR	NR
VOCs				
Acetone	67-64-1	None	NR	NR

* = Result exceeds background concentration.
CAS = Chemical Abstract Service.
ID = Identification
ft = Feet.
J = estimated value less than reporting limits.
Mg/kg = milligrams per kilogram.
NR = Not reported/not analyzed.
PCB = Polychlorinated biphenyl.
RVAAP = Ravenna Army Ammunition Plant.
TAL = Target analyte list.
U = Non-detectable concentration.
SVOC = Semi-volatile organic compound.
VOC = Volatile organic compound.

Table 4-3. Analytes Detected in Characterization of 14 AOCs Sediment Samples

Station			ASYsd-024M
Sample ID			ASYsd-024M-SD
Date			11/11/04
Depth (ft)			0.0–0.5
Parameters Analyzed			TAL Metals, Explosives
Analyte (mg/kg)	CAS Number	Background Criteria	
Metals			
Aluminum	7429-90-5	13900.00	15000 *
Arsenic	7440-38-2	19.50	10
Barium	7440-39-3	123.00	140 *
Beryllium	7440-41-7	0.38	1.2 *
Cadmium	7440-43-9	0.00	1.8 *
Calcium	7440-70-2	5510.00	5500
Chromium	7440-47-3	18.10	20 *
Cobalt	7440-48-4	9.10	7.3
Copper	7440-50-8	27.60	31 *
Iron	7439-89-6	28200.00	17000
Lead	7439-92-1	27.40	37 *
Magnesium	7439-95-4	2760.00	2100
Manganese	7439-96-5	1950.00	420
Mercury	7439-97-6	0.06	0.14 *
Nickel	7440-02-0	17.70	20 *
Potassium	7440-09-7	1950.00	1400
Selenium	7782-49-2	1.70	2.7 *
Sodium	7440-23-5	112.00	450 *
Vanadium	7440-62-2	26.10	24
Zinc	7440-66-6	532.00	310
Explosives			
2-Amino-4,6-Dinitrotoluene	35572-78-2	None	0.08 J*

* = Result exceeds background concentration.
CAS = Chemical Abstract Service.
ID = Identification
ft = Feet.
Mg/kg = milligrams per kilogram.
TAL = Target analyte list.

Table 4-4. Human Health Chemicals of Potential Concern per the Characterization of 14 AOCs Report

Surface Soil	
Aluminum	Benz(a)anthracene
Arsenic	Benzo(a)pyrene
Cadmium	Benzo(b)fluoranthene
Chromium	Benzo(ghi)perylene
Iron	Dibenz(a,h)anthracene
Lead	Indeno(1,2,3-c)pyrene
Manganese	Phenanthrene
2-methylnaphthalene	2-Amino-4,6-dinitrotoluene
Acenaphthylene	

Adapted from Table L10-14: Characterization of 14 AOCs at the Ravenna Army Ammunition Plant (MKM 2007).

Table 4-5. Chemicals Exceeding Ecological Screening Values per the Characterization of 14 AOCs Report

Surface Soil	
Aluminum	Arochlor 1260
Arsenic	4-methylphenol
Barium	Benzo(a) pyrene
Cadmium	Bis(2-ethylhexyl)phthalate
Chromium	Butylbenzyl phthalate
Copper	Dibenzofuran
Iron	Naphthalene
Lead	2-Amino-4,6-dinitrotoluene
Magnesium	2-Nitrotoluene
Nickel	3-Nitrotolune
Selenium	Nitrocellulose
Silver	
Zinc	
Mercury	

Adapted from Table L10-14: Characterization of 14 AOCs at the Ravenna Army Ammunition Plant (MKM 2007).

Table 4-6. Chemicals Detected at Concentrations above Screening Criteria in Previous Investigations

Surface Soil		Subsurface Soil
Aluminum	Benz(a)anthracene	Medium not sampled
Arsenic	Benzo(a)pyrene	
Cadmium	Benzo(b)fluoranthene	
Chromium	Dibenz(a,h)anthracene	
Cobalt	Indeno(1,2,3-cd)pyrene	
Lead		
Manganese		

Table 4-7. PBA08 RI Surface Soil Samples and Rationales – April 2010

PBA08 RI Location	Targeted Area	Purpose	Analyses Performed				
			Metals	Explosives	VOCs	Pesticides/ PCBs	SVOCs
ASYss-069M	ASYss-013M (Building T-19 Fire Station, Equipment Storage)	Delineated lateral extent of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-070M	ASYss-019M (Incinerator)	Delineated lateral extent of lead, cadmium.	Y	Y	N	N	PAH
ASYss-071M	ASYss-015M thru -018M (Workmen's Sheds, Shops, and Equipment Storage Buildings).	Delineated lateral extent of arsenic.	Y	Y	N	N	PAH
ASYss-072M	ASYss-006M (Water Tower)	Delineated lateral extent of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-073M	ASYss-004M (Concrete Rubble)	Delineated lateral extent of PAHs.	Y	Y	N	N	PAH
ASYss-074M	ASYss-004M (Concrete Rubble)	Further refined previously identified chemical exceedances of PAHs.	Y	Y	Y	Y	Y
ASYss-075M	ASYss-004M (Concrete Rubble)	Further refined previously identified chemical exceedances of PAHs.	Y	Y	N	N	PAH
ASYss-076M	ASYss-004M (Concrete Rubble)	Further refined previously identified chemical exceedances of PAHs.	Y	Y	Y	Y	Y
ASYss-077M	ASYss-003M (RR Ties)	Delineated lateral extent of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-078M	ASYss-003M (RR Ties)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-079M	ASYss-003M (RR Ties)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH

Table 4–7. PBA08 RI Surface Soil Samples, Rationales, and Analyses – April 2010 (continued)

PBA08 RI Location	Targeted Area	Purpose	Analyses Performed				
			Metals	Explosives	VOCs	Pesticides/ PCBs	SVOCs
ASYss-080M	ASYss-003M (RR Ties)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-081M	ASYss-001M (RCC Pipes)	Delineated lateral extent of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-082M	ASYss-001M (RCC Pipes)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-083M	ASYss-001M (RCC Pipes)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-084M	ASYss-001M (RCC Pipes)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-085M	ASYss-001M (RCC Pipes)	Further refined previously identified chemical exceedances of aluminum, manganese.	Y	Y	N	N	PAH
ASYss-086M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-087M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-088M	Not applicable	Characterization of large areas at the site.	Y	Y	Y	Y	Y
ASYss-089M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-090M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-091M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH

Table 4–7. PBA08 RI Surface Soil Samples, Rationales, and Analyses – April 2010 (continued)

PBA08 RI Location	Targeted Area	Purpose	Analyses Performed				
			Metals	Explosives	VOCs	Pesticides/ PCBs	SVOCs
ASYss-092M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-093M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-094M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-095M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-096M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-097M	Not applicable	Characterization of large areas at the site.	Y	Y	Y	Y	Y
ASYss-098M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-099M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-100M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-101M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-102M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH
ASYss-103M	Not applicable	Characterization of large areas at the site.	Y	Y	N	N	PAH

PAH = Polycyclic aromatic hydrocarbon.
PCB = Polychlorinated biphenyl.
RCC = Reinforced concrete culvert.
RR = Railroad.
SVOC = Semi-volatile organic compound.
VOC = Volatile organic compound.

Table 4-8. PBA08 RI Chromium Speciation Samples – April 2010

PBA08 RI Location	Rationale for Sample Selection
ASYss-066	Discrete sample collected to assess chromium speciation. Previous chromium result at represents chromium near background concentration (ASYss-031M at 18 mg/kg).
ASYss-067	Discrete sample collected to assess chromium speciation. Previous chromium result represents elevated chromium concentration (ASYss-013M at 34 mg/kg).
ASYss-068	Discrete sample collected to assess chromium speciation. Previous chromium result represents elevated chromium concentration (ASYss-019M at 64 mg/kg).

mg/kg = milligrams per kilogram.
PBA08 RI = Performance-Based Acquisition 2008 Remedial Investigation.

Table 4-9. PBA08 RI Subsurface Soil Samples, Rationale, and Analyses – April 2010

Location	Comments/Rationale	Sample Type	Depth (ft bgs)	Analyses Performed				
				Metals	Explosives	VOCs	Pesticides/PCBs	SVOCs
ASYsb-045	Delineated vertical extent of previously identified contamination in ASYss-001M (RCC Pipes).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		Discrete[a]	7–13	Y	Y	N	N	PAH
	QA/QC.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	0–1	Y	Y	N	N	PAH
ASYsb-046	Delineated vertical extent of previously identified contamination in ASYss-003M (RR Ties). Analyzed for RVAAP full-suite analytes.	Discrete	0–1	Y	Y	Y	Y	Y
		Discrete	1–4	Y	Y	Y	Y	Y
		Discrete	4–7	Y	Y	Y	Y	Y
		NA	7–13	N	N	N	N	N
ASYsb-047	Delineated vertical extent of previously identified contamination in ASYss-004 (Concrete Rubble).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
ASYsb-047	QA/QC.	Discrete	4–7	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
ASYsb-048	Delineated vertical extent of previously identified contamination in ASYss-002M (RR Ballast).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
	QA/QC.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	0–1	Y	Y	N	N	PAH
ASYsb-049	Delineated vertical extent of previously identified contamination in ASYss-005M (Service Station #1).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		Discrete[a]	7–13	Y	Y	N	N	PAH

Table 4–9. PBA08 RI Subsurface Soil Samples, Rationale, and Analyses – April 2010 (continued)

Location	Comments/Rationale	Sample Type	Depth (ft bgs)	Analyses Performed				
				Metals	Explosives	VOCs	Pesticides/PCBs	SVOCs
ASYsb-050	Collected for SVOCs and VOCs to evaluate field observation of black staining and petroleum odor.	Discrete	8.0–9.5	N	N	Y	N	Y
	Characterized location that appears to be a stormwater infiltration gallery or drainage control system (labeled as "8-in tile field drains" on a 1953 utilities map for Atlas Scrap Yard).	Discrete	0-1	Y	Y	N	N	PAH
		Discrete	1-4	Y	Y	N	N	PAH
		Discrete	4-7	Y	Y	N	N	PAH
		NA	7-13	N	N	N	N	N
ASYsb-051	Geotechnical.	Discrete	4.0-5.6	N	N	N	N	N
		Discrete	8.5-10	N	N	N	N	N
ASYsb-052	Delineated vertical extent of previously identified contamination in ASYss-006M (Water Tower)	Discrete	0-1	Y	Y	N	N	PAH
		Discrete	1-4	Y	Y	N	N	PAH
		Discrete	4-7	Y	Y	N	N	PAH
		NA	7-13	N	N	N	N	N
	QA/QC.	NA	7-13	N	N	N	N	N
		NA	7-13	N	N	N	N	N
ASYsb-053	Delineated vertical extent of previously identified contamination in ASYss-025M.	Discrete	0-1	Y	Y	N	N	PAH
		Discrete	1-4	Y	Y	N	N	PAH
		Discrete	4-7	Y	Y	N	N	PAH
		NA	7-13	N	N	N	N	N
ASYsb-054	Confirmed absence of contamination in previously sampled ASYss-009M. Analyzed for RVAAP full-suite analytes.	Discrete	0-1	Y	Y	Y	Y	Y
		Discrete	1-4	Y	Y	Y	Y	Y
		Discrete	4-7	Y	Y	Y	Y	Y
		NA	7-13	N	N	N	N	N
ASYsb-055	Geotechnical.	Discrete	4-5.5	N	N	N	N	N
		Discrete	9-10.5	N	N	N	N	N
ASYsb-056	Delineated vertical extent of previously identified contamination in ASYss-011M.	Discrete	0-1	Y	Y	N	N	PAH
		Discrete	1-4	Y	Y	N	N	PAH
		Discrete	4-7	Y	Y	N	N	PAH
		NA	7-13	N	N	N	N	N

Table 4–9. PBA08 RI Subsurface Soil Samples, Rationale, and Analyses – April 2010 (continued)

Location	Comments/Rationale	Sample Type	Depth (ft bgs)	Analyses Performed				
				Metals	Explosives	VOCs	Pesticides/PCBs	SVOCs
ASYsb-057	Characterized potential former storm sewer terminus.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
ASYsb-058	Delineated vertical extent of previously identified contamination in the IA.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
ASYsb-059	Delineated vertical extent of previously identified contamination in ASYss-013M.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		Discrete[a]	7–13	Y	Y	N	N	PAH
	QA/QC	Discrete	4–7	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
ASYsb-060	Confirmed absence of contamination in previously sampled area in ASYss-012M (Service Station #2).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
ASYsb-061	Delineated vertical extent of previously identified contamination in ASYss-015M.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
ASYsb-062	Delineated vertical extent of previously identified contamination in the ASYss-017M. Analyzed for RVAAP full-suite analytes.	Discrete	0–1	Y	Y	Y	Y	Y
		Discrete	1–4	Y	Y	Y	Y	Y
		Discrete	4–7	Y	Y	Y	Y	Y
		NA	7–13	N	N	N	N	N
	QA/QC. Analyzed for RVAAP full-suite analytes.	Discrete	0–1	Y	Y	Y	Y	Y
		Discrete	0–1	Y	Y	Y	Y	Y

Table 4–9. PBA08 RI Subsurface Soil Samples, Rationale, and Analyses – April 2010 (continued)

Location	Comments/Rationale	Sample Type	Depth (ft bgs)	Analyses Performed				
				Metals	Explosives	VOCs	Pesticides/PCBs	SVOCs
ASYsb-063	Delineated vertical extent of previously identified contamination in ASYss-027M (perimeter drainage ditch); boring terminated at 7 ft due to refusal.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NS	7–13	N	N	N	N	N
ASYsb-064	Delineated vertical extent of previously identified contamination in ASYss-019M (Incinerator).	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NA	7–13	N	N	N	N	N
	QA/QC.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	0–1	Y	Y	N	N	PAH
ASYsb-065	Delineated vertical extent of previously identified contamination in ASYss-032M (perimeter drainage ditch); boring terminated at 7 ft due to refusal.	Discrete	0–1	Y	Y	N	N	PAH
		Discrete	1–4	Y	Y	N	N	PAH
		Discrete	4–7	Y	Y	N	N	PAH
		NS	7–13	N	N	N	N	N

Ft = Feet.
IA = Inactive area.
NA = Not Applicable.
NS =
PCB = Polychlorinated biphenyl.
RCC = Reinforced concrete culvert.
QA = Quality assurance.
QC = Quality control.
RR = Railroad.
RVAAP = Ravenna Army Ammunition Plant.
SVOC = Semi-volatile organic compound.
VOC = Volatile organic compound.

Table 4-10. Changes from the PBA08 Sample and Analysis Plan

Location	Affected Sample	Date Sampled	Change/Rationale
ASYsb-046	ASYSB-046-5664-SO	4/5/2010	Original sample location was covered by railroad ties and subsequently relocated.
	ASYSB-046-5665-SO	4/5/2010	
	ASYSB-046-5666-SO	4/5/2010	
	ASYSB-046-5667-SO	4/5/2010	
ASYsb-049	ASYSB-049-5686-SO	4/6/2010	Location was added to sample VOCs and SVOCs based on hydrocarbon odor and elevated air monitor readings
ASYsb-061	ASYSB-061-5722-SO	3/30/2010	Sample had to be recollected in adjacent borehole due to poor recovery in original borehole.
ASYsb-062	ASYSB-062-5726-SO	3/30/2010	Original sample location was covered by a concrete pad and subsequently relocated.
	ASYSB-062-5727-SO	3/30/2010	
	ASYSB-062-5728-SO	3/30/2010	
	ASYSB-062-5729-SO	3/30/2010	
	ASYSB-062-6218-FD	3/30/2010	
	ASYSB-062-6226-QA	3/30/2010	
ASYss-066	ASYSS-066-5778-SO	4/7/2010	Original sample location was relocated to the bottom of a ditch.

SVOC = Semi-volatile organic compound.
VOC = Volatile organic compound.

Table 4-11. PBA08 RI Surface Soil Samples, Rationale, and Analyses – April 2011

PBA08 RI Location	Targeted Area	Purpose	Analyses Performed				
			Metals	Explosives	VOCs	Pesticides/ PCBs	SVOCs
ASYss-111M	ASYss-003M (RR Ties)	Lateral delineation of soil around ASYss-003M (RR Ties).	Y	N	N	N	PAH
ASYss-112M	ASYss-003M (RR Ties)	Lateral delineation of soil around ASYss-003M (RR Ties).	Y	N	N	N	PAH
ASYss-113M	ASYss-003M (RR Ties)	Lateral delineation of soil around ASYss-003M (RR Ties).	Y	N	N	N	PAH
ASYss-114M	ASYss-004M (Concrete Rubble)	Lateral delineation of soil around ASYss-004M (Concrete Rubble).	Y	N	N	N	PAH
ASYss-115M	Identified Pile North of RR Ties	Investigate for Potential Contamination.	Y	N	N	N	PAH
ASYss-116M	Parking area proximate to ASYss-002M	Refinement of potential contamination at parking area associated with ASYss-002M.	Y	N	N	N	PAH
ASYss-117M	Parking area proximate to ASYss-002M	Refinement of potential contamination at parking area associated with ASYss-002M.	Y	N	N	N	PAH
ASYss-118M	Parking area proximate to ASYss-002M	Refinement of potential contamination at parking area associated with ASYss-002M.	Y	N	N	N	PAH
ASYss-119M	Parking area proximate to ASYss-002M	Lateral delineation of potential contamination at parking area associated with ASYss-002M.	Y	N	N	N	PAH

Table 4–11. PBA08 RI Surface Soil Samples, Rationale, and Analyses – April 2011 (continued)

PBA08 RI Location	Targeted Area	Purpose	Analyses Performed				
			Metals	Explosives	VOCs	Pesticides/ PCBs	SVOCs
ASYss-120M	Parking area proximate to ASYss-004M	Lateral delineation of potential contamination at ASYss-004M (Concrete Rubble).	Y	N	N	N	PAH
ASYss-121M	Large ISM Sample ASYss-088M	Further characterization of contamination within Large ISM Sample ASYss-088M.	Y	N	N	N	PAH
ASYss-122M	ASYss-003M (RR Ties)	Lateral delineation of soil around ASYss-003M (RR Ties).	Y	N	N	N	PAH
ASYss-123M	Roadside Drainage Ditch within Active Storage Area	Evaluate potential contamination within Drainage Ditch.	Y	N	N	N	PAH
ASYss-124M	Large ISM Sample ASYss-089M	Further characterization of contamination within Large ISM Sample ASYss-089M.	Y	N	N	N	PAH
ASYss-125M	Large ISM Sample ASYss-093M	Further characterization of contamination within Large ISM Sample ASYss-093M.	Y	N	N	N	PAH
ASYss-126M	Roadside Drainage Ditch within Active Storage Area	Evaluate potential contamination within Drainage Ditch.	Y	N	N	N	PAH

ISM = Incremental sampling method.
PBA08 RI = Performance-Based Acquisition 2008 Remedial Investigation
PCB = Polychlorinated biphenyl.
RR = Railroad.
SVOC = Semi-volatile organic compound.
VOC = Volatile organic compound

THIS PAGE INTENTIONALLY LEFT BLANK.

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples

Location		**ASYss-069M**	**ASYss-070M**	**ASYss-070M**	**ASYss-071M**	**ASYss-072M**	**ASYss-073M**	**ASYss-074M**	**ASYss-075M**
Sample Id		**ASYss-069M-5743-SO**	**ASYss-070M-6209-FD**	**ASYss-070M-5744-SO**	**ASYss-071M-5745-SO**	**ASYss-072M-5746-SO**	**ASYss-073M-5747-SO**	**ASYss-074M-5748-SO**	**ASYss-075M-5749-SO**
Date		**04/07/10**	**04/05/10**	**04/05/10**	**04/06/10**	**04/07/10**	**04/06/10**	**04/06/10**	**04/06/10**
Depth (ft)		**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**
Parameters Analyzed		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria**								
Inorganic Chemicals									
Aluminum	17700	16100	10200	10300	12800	12200	14500	11600	13300
Antimony	0.96	0.21 J	0.48 J	0.33 J	0.24 J	0.15 J	0.1 J	0.098 J	0.11 J
Arsenic	15.4	12.2 J	9.3 J	10 J	8	7.2 J	8.4	8.3	8.8
Barium	88.4	**193 ***	**95.9 ***	**91.3 ***	**118 ***	75.3	**129 ***	**96.5 ***	**110 ***
Beryllium	0.88	**2 ***	0.39 J	0.38 J	**1.2 ***	0.81	**1.4 ***	**1.1 ***	**1.2 ***
Cadmium	0	**0.46 ***	**1.3 J***	**3 J***	**0.36 ***	**0.21 ***	**0.19 J***	**0.13 J***	**0.15 J***
Calcium	15800	**58200 ***	1240	1260	**34000 J***	**20600 ***	**50500 J***	**29700 J***	**35200 J***
Chromium	17.4	**23.4 J***	**20 J***	**27.4 J***	**22.7 J***	**22.5 J***	17.1 J	14.6 J	17.4 J
Cobalt	10.4	7.1 J	5.4 J	4.9 J	6.7	4.1 J	5.7	7	6.9
Copper	17.7	14.9	**33.8 J***	**38.5 J***	13.6 J	8.1	13.3 J	13.9 J	16.3 J
Iron	23100	21900	22500	**24700 ***	18200	15400	16800	17300	17700
Lead	26.1	**61.1 ***	**240 J***	**312 J***	**39.8 J***	**79 ***	20.1 J	17.8 J	18.4 J
Magnesium	3030	**8080 J***	1470	1450	**5830 ***	**4090 J***	**6980 ***	**5840 ***	**6400 ***
Manganese	1450	**1600 ***	275	258	1000	630	1210	817	898
Mercury	0.036	**0.049 J***	**0.16 ***	**0.36 ***	**0.063 J***	**0.047 J***	0.034 J	0.022 J	0.031 J
Nickel	21.1	15.7	9.9 J	10.7 J	17.7	12.7	14.6	16.9	17.9
Potassium	927	**1140 ***	654 J	609 J	**1080 ***	731	**1050 ***	**1080 ***	**1080 ***
Selenium	1.4	**1.5 J***	0.84 J	0.83 J	1 J	0.88 J	1.1 J	0.86 J	0.99 J
Silver	0	**0.072 J***	**0.23 J***	**0.19 J***	**2.4 ***	**0.049 J***	**0.035 J***	**0.031 J***	**0.033 J***
Sodium	123	**319 ***	59.9 J	51.7 J	**238 ***	**136 ***	**245 ***	**167 ***	**180 ***
Thallium	0	**0.23 ***	**0.17 J***	**0.18 J***	**0.14 J***	**0.14 J***	**0.11 J***	**0.11 J***	**0.11 J***
Vanadium	31.1	16 J	18.2 J	18.3 J	15.5 J	16.2 J	12.8 J	12.5 J	13.8 J
Zinc	61.8	**71.2 ***	**628 ***	**205 ***	**70.8 J***	61	48.6 J	46.3 J	48.9 J
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.24 U
2,6-Dinitrotoluene	None	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.24 U
3-Nitrotoluene	None	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.24 U
4-Amino-2,6-Dinitrotoluene	None	**0.062 J***	<0.25 U	<0.25 U	**0.065 J***	<0.25 U	**0.045 J***	**0.029 J***	**0.051 J***
HMX	None	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	NR	NR	NR	**1 J***	NR
Tetryl	None	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U	<0.24 U

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-069M	ASYss-070M	ASYss-070M	ASYss-071M	ASYss-072M	ASYss-073M	ASYss-074M	ASYss-075M
Sample Id		ASYss-069M-5743-SO	ASYss-070M-6209-FD	ASYss-070M-5744-SO	ASYss-071M-5745-SO	ASYss-072M-5746-SO	ASYss-073M-5747-SO	ASYss-074M-5748-SO	ASYss-075M-5749-SO
Date		04/07/10	04/05/10	04/05/10	04/06/10	04/07/10	04/06/10	04/06/10	04/06/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	NR	**0.12 J***	NR
Acenaphthene	None	**0.33 ***	<0.0068 U	**0.0054 J***	**0.35 ***	**0.01 ***	**0.17 ***	**0.18 J***	**0.14 ***
Acenaphthylene	None	**0.12 ***	<0.0068 U	<0.0068 U	**0.26 ***	**0.012 ***	**0.3 ***	**0.15 J***	**0.42 ***
Anthracene	None	**0.81 ***	<0.0068 U	<0.0068 U	**1.4 ***	**0.03 ***	**0.88 ***	**2 ***	**1.2 ***
Benz(a)anthracene	None	**2.1 ***	**0.013 ***	**0.015 ***	**4.3 ***	**0.13 ***	**2.6 ***	**3.1 ***	**3.3 ***
Benzo(a)pyrene	None	**1.7 ***	**0.017 ***	**0.015 ***	**4.4 ***	**0.13 J***	**2.5 ***	**3.3 ***	**3.1 ***
Benzo(b)fluoranthene	None	**2.6 ***	**0.046 ***	**0.035 ***	**5.9 ***	**0.19 ***	**4 ***	**5.6 ***	**5.4 ***
Benzo(ghi)perylene	None	**1.1 ***	**0.014 ***	**0.014 ***	**3 ***	**0.092 ***	**2 ***	**2.5 ***	**2.3 ***
Benzo(k)fluoranthene	None	**1.1 ***	**0.018 ***	**0.013 ***	**3.3 ***	**0.1 ***	**2 ***	**1.8 ***	**2.1 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	NR	<1.7 U	NR
Carbazole	None	NR	NR	NR	NR	NR	NR	**0.36 ***	NR
Chrysene	None	**2.2 ***	**0.038 ***	**0.029 ***	**4.9 ***	**0.14 J***	**3 ***	**3.7 ***	**4 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	NR	<1.7 U	NR
Dibenz(a,h)anthracene	None	**0.31 ***	<0.0068 U	<0.0068 U	**0.88 ***	**0.028 ***	**0.43 ***	**0.63 ***	**0.49 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	NR	**0.12 J***	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	NR	<1.7 U	NR
Fluoranthene	None	**5.4 ***	**0.075 ***	**0.041 ***	**8.9 ***	**0.22 ***	**5 ***	**5.7 ***	**6.1 ***
Fluorene	None	**0.33 ***	<0.0068 U	<0.0068 U	**0.35 ***	**0.011 ***	**0.16 ***	**0.31 ***	**0.12 ***
Indeno(1,2,3-cd)pyrene	None	**1.1 ***	**0.013 ***	**0.014 ***	**2.8 ***	**0.083 ***	**1.7 ***	**2.1 ***	**2.1 ***
Naphthalene	None	**0.67 ***	**0.023 ***	**0.033 ***	**0.29 ***	**0.031 ***	**0.2 ***	**0.1 J***	**0.18 ***
Phenanthrene	None	**4 ***	**0.044 ***	**0.033 ***	**3.7 ***	**0.1 ***	**1.7 ***	**1.5 ***	**1.6 ***
Pyrene	None	**3.8 ***	**0.044 ***	**0.027 ***	**7.1 ***	**0.18 ***	**4 ***	**4.8 ***	**5 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	NR	**0.019 J***	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-076M	ASYss-076M	ASYss-077m	ASYss-078M	ASYss-079M	ASYss-080M	ASYss-081M	ASYss-082M
Sample Id		ASYss-076M-6211-FD	ASYss-076M-5750-SO	ASYss-077M-5751-SO	ASYss-078M-5752-SO	ASYss-079M-5753-SO	ASYss-080M-5754-SO	ASYss-081M-5755-SO	ASYss-082M-5756-SO
Date		04/06/10	04/06/10	04/07/10	04/07/10	04/07/10	04/07/10	04/02/10	04/02/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		RVAAP Full Suite	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	16700	15500	16800	**30400 ***	**32100 ***	**21100 ***	15700 J	**19700 J***
Antimony	0.96	0.18 J	0.15 J	0.13 J	0.099 J	0.076 J	0.11 J	0.13 J	0.16 J
Arsenic	15.4	9.5	8.6	9.7 J	4.1 J	4 J	7.4 J	8 J	5.5 J
Barium	88.4	**171 ***	**156 ***	**155 ***	**322 ***	**325 ***	**201 ***	**161 ***	**232 ***
Beryllium	0.88	**1.8 ***	**1.7 ***	**2 ***	**6.3 ***	**5.3 ***	**3.9 ***	**1.9 J***	**3.1 J***
Cadmium	0	**0.38 ***	**0.33 ***	**0.15 J***	**0.16 J***	**0.18 J***	**0.15 J***	**0.2 J***	**0.39 J***
Calcium	15800	**77200 J***	**75300 J***	**57500 ***	**167000 ***	**178000 ***	**100000 ***	**56200 ***	**89500 ***
Chromium	17.4	**28.5 J***	**23.5 J***	**33.1 J***	**36.1 J***	**35.8 J***	**45.1 J***	**35.2 J***	**19.5 J***
Cobalt	10.4	5	4.5	7.5 J	2 J	1.5 J	5.1 J	4.9 J	3.4 J
Copper	17.7	**51.2 J***	**51.2 J***	15	16.3	9.1	13.8	9.8 J	10.5 J
Iron	23100	16100	15600	23000	12800	9710	19400	16700	12400
Lead	26.1	**39.8 J***	**40.4 J***	16	15.7	13.1	15.6	24.5 J	24.9 J
Magnesium	3030	**8770 ***	**8610 ***	**8500 J***	**27100 J***	**23200 J***	**16700 J***	**8960 ***	**12100 ***
Manganese	1450	**1510 ***	1400	1390	**3330 ***	**3180 ***	**1930 ***	**1790 ***	**2500 ***
Mercury	0.036	**0.066 J***	**0.074 J***	0.018 J	0.018 J	<0.1 U	0.021 J	**0.048 J***	**0.05 J***
Nickel	21.1	19.1	17.5	**24.6 ***	13	12	**24.5 ***	17.9 J	10.6 J
Potassium	927	**1400 ***	**1130 ***	**1310 ***	**1840 ***	**1980 ***	**1680 ***	**1040 J***	**1440 J***
Selenium	1.4	**1.5 J***	**1.4 J***	1.2 J	**2.5 J***	**2.7 J***	**1.8 J***	**1.7 J***	**2.3 J***
Silver	0	**0.07 J***	**0.073 J***	**0.059 J***	**0.17 J***	**0.11 J***	**0.089 J***	**0.054 J***	**0.068 J***
Sodium	123	**307 ***	**295 ***	**375 ***	**1130 ***	**1120 ***	**743 ***	**293 J***	**447 J***
Thallium	0	**0.11 J***	**0.1 J***	**0.16 J***	**0.092 J***	**0.08 J***	**0.11 J***	**0.12 J***	**0.093 J***
Vanadium	31.1	15.5 J	13.7 J	16.3 J	13 J	11.9 J	14.2 J	18 J	11 J
Zinc	61.8	**76.9 J***	**75.1 J***	45.4	37.3	30.7	39.8	56	**178 ***
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	**0.033 J***	<0.24 U	**0.067 J***	**0.16 J***	<0.24 U	**0.098 J***	<0.25 U	<0.25 U
2,6-Dinitrotoluene	None	<0.24 U	**0.13 J***	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U	<0.25 U
3-Nitrotoluene	None	<0.24 U	<0.24 U	<0.24 U	**0.053 J***	<0.24 U	**0.091 J***	<0.25 U	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	**0.21 J***	<0.25 U	<0.25 U
HMX	None	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U	<0.25 U
Nitrocellulose	None	**3.1 J***	**2.6 J***	NR	NR	NR	NR	NR	NR
Tetryl	None	**0.11 J***	<0.24 U	<0.24 U	**0.14 J***	**0.04 J***	**0.13 J***	<0.25 U	<0.25 U
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	**1.2 J***	**1.4 J***	NR	NR	NR	NR	NR	NR
Acenaphthene	None	**0.32 J***	**0.32 J***	**0.16 ***	**0.25 ***	**0.035 ***	<0.17 U	**0.033 ***	**0.017 ***
Acenaphthylene	None	**0.15 J***	**0.16 J***	**1.2 ***	**0.89 ***	**0.56 ***	**2.5 ***	**0.081 ***	**0.075 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-076M	ASYss-076M	ASYss-077m	ASYss-078M	ASYss-079M	ASYss-080M	ASYss-081M	ASYss-082M
Sample Id		ASYss-076M-6211-FD	ASYss-076M-5750-SO	ASYss-077M-5751-SO	ASYss-078M-5752-SO	ASYss-079M-5753-SO	ASYss-080M-5754-SO	ASYss-081M-5755-SO	ASYss-082M-5756-SO
Date		04/06/10	04/06/10	04/07/10	04/07/10	04/07/10	04/07/10	04/02/10	04/02/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed	Background	RVAAP Full Suite	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Criteria								
Anthracene	None	**0.99 ***	**0.87 ***	**4.4 ***	**4.5 ***	**0.88 ***	**5.4 ***	**0.14 ***	**0.076 ***
Benz(a)anthracene	None	**6.4 ***	**6.5 ***	**12 ***	**17 ***	**2.6 ***	**17 ***	**0.49 ***	**0.32 ***
Benzo(a)pyrene	None	**6.9 ***	**7.3 ***	**12 ***	**19 ***	**2.5 ***	**20 ***	**0.51 ***	**0.35 ***
Benzo(b)fluoranthene	None	**11 ***	**12 ***	**23 ***	**37 ***	**4.9 ***	**37 ***	**0.89 ***	**0.55 ***
Benzo(ghi)perylene	None	**5.4 ***	**5.5 ***	**8.7 ***	**12 ***	**2.1 ***	**14 ***	**0.4 ***	**0.24 ***
Benzo(k)fluoranthene	None	**3.9 ***	**4 ***	**12 ***	**14 ***	**2.3 ***	**15 ***	**0.36 ***	**0.27 ***
Bis(2-ethylhexyl)phthalate	None	<4.2 U	<4.2 U	NR	NR	NR	NR	NR	NR
Carbazole	None	<0.64 U	<0.64 U	NR	NR	NR	NR	NR	NR
Chrysene	None	**6.6 ***	**7.7 ***	**20 ***	**30 ***	**3.5 ***	**28 ***	**0.58 ***	**0.37 ***
Di-n-butyl phthalate	None	<4.2 U	<4.2 U	NR	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	**1.3 ***	**1.5 ***	**2.7 ***	**4.2 ***	**0.78 ***	**5.1 ***	**0.11 ***	**0.084 ***
Dibenzofuran	None	**0.37 J***	**0.42 J***	NR	NR	NR	NR	NR	NR
Diethyl phthalate	None	<4.2 U	<4.2 U	NR	NR	NR	NR	NR	NR
Fluoranthene	None	**12 ***	**12 ***	**14 ***	**19 ***	**2.8 ***	**18 ***	**1 ***	**0.66 ***
Fluorene	None	**0.22 J***	**0.2 J***	**0.39 ***	**0.4 ***	**0.056 ***	**0.3 ***	**0.037 ***	**0.026 ***
Indeno(1,2,3-cd)pyrene	None	**4.5 ***	**4.7 ***	**8.3 ***	**12 ***	**1.8 ***	**13 ***	**0.36 ***	**0.24 ***
Naphthalene	None	**0.75 ***	**0.97 ***	**0.29 ***	**0.18 ***	**0.23 ***	**0.33 ***	**0.12 ***	**0.13 ***
Phenanthrene	None	**2.5 ***	**2.2 ***	**1.9 ***	**2.5 ***	**0.51 ***	**1.7 ***	**0.48 ***	**0.28 ***
Pyrene	None	**9.9 ***	**11 ***	**15 ***	**22 ***	**3 ***	**19 ***	**0.82 ***	**0.5 ***
Pesticides/PCBs									
PCB-1260	None	**0.096 J***	**0.17 J***	NR	NR	NR	NR	NR	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-083M	ASYss-084M	ASYss-085M	ASYss-086M	ASYss-087M	ASYss-088M	ASYss-089M	ASYss-090M
Sample Id		ASYss-083M-5757-SO	ASYss-084M-5758-SO	ASYss-085M-5759-SO	ASYss-086M-5760-SO	ASYss-087M-5761-SO	ASYss-088M-5756-SO	ASYss-089M-5763-SO	ASYss-090M-5764-SO
Date		04/02/10	04/02/10	04/02/10	04/02/10	04/02/10	04/05/10	04/05/10	04/05/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	8230 J	**23700 J***	8950 J	11100 J	11300 J	14400	13400	10300
Antimony	0.96	0.1 J	0.27 J	0.14 J	0.11 J	0.1 J	0.25 J	0.26 J	0.65 J
Arsenic	15.4	5 J	6.1 J	7.4 J	8.5 J	8.5 J	10.1 J	8.9 J	7.7 J
Barium	88.4	**94.6 ***	**325 ***	**101 ***	**98.4 ***	80.3	**171 ***	**120 ***	**95.8 ***
Beryllium	0.88	**1.3 J***	**4.2 J***	**1.2 J***	**0.9 J***	0.71 J	**2.2 J***	**1.5 J***	0.87 J
Cadmium	0	**0.28 J***	**0.69 J***	**0.21 J***	**0.16 J***	**0.17 J***	**0.35 J***	**0.27 J***	**0.3 J***
Calcium	15800	**35500 ***	**115000 ***	**29300 ***	**19100 ***	12700	**68300 ***	**39000 ***	**28400 ***
Chromium	17.4	11.5 J	**59 J***	**21.6 J***	**19.6 J***	**18.8 J***	**25.9 J***	**23.9 J***	**19.1 J***
Cobalt	10.4	2.1 J	3.6 J	3.6 J	5.3 J	5.1 J	4.8 J	4.7 J	5.3 J
Copper	17.7	9.7 J	**20 J***	11.7 J	8.8 J	9 J	16 J	11.2 J	11.4 J
Iron	23100	9160	**42100 ***	14100	16700	17700	17400	17700	15500
Lead	26.1	**29.8 J***	**110 J***	**58.5 J***	25.3 J	21 J	23.8 J	22.5 J	25.6 J
Magnesium	3030	**6350 ***	**15300 ***	**5500 ***	**3560 ***	2950	**10200 ***	**6630 ***	**5490 ***
Manganese	1450	914	**3600 ***	1010	837	594	**1610 ***	1010	658
Mercury	0.036	0.019 J	**0.18 ***	**0.037 J***	**0.052 J***	**0.051 J***	**0.056 J***	**0.063 J***	**0.048 J***
Nickel	21.1	8 J	**25.3 J***	12.8 J	13.1 J	13.2 J	19.3 J	15.8 J	13.6 J
Potassium	927	608 J	**1790 J***	652 J	714 J	765 J	**1250 J***	**958 J***	830 J
Selenium	1.4	1 J	**2.9 J***	1.2 J	1.2 J	1 J	**1.9 J***	**1.5 J***	1.1 J
Silver	0	**0.027 J***	**0.073 J***	**0.029 J***	**0.054 J***	**0.048 J***	**0.11 J***	**0.33 J***	**0.17 J***
Sodium	123	**200 J***	**616 J***	**178 J***	101 J	82.9 J	**346 J***	**205 J***	123 J
Thallium	0	<0.2 U	**0.072 J***	**0.066 J***	**0.15 J***	**0.17 J***	**0.16 J***	**0.13 J***	**0.13 J***
Vanadium	31.1	4.5 J	8.1 J	6.4 J	17.2 J	17.9 J	12.3 J	14.7 J	14.8 J
Zinc	61.8	**140 ***	**443 ***	**102 ***	49.3	44.5	**75.6 ***	45.4	**88.7 ***
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
2,6-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
3-Nitrotoluene	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
HMX	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
Nitrocellulose	None	NR	NR	NR	NR	NR	**4.2 J***	NR	NR
Tetryl	None	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	**2.2 J***	NR	NR
Acenaphthene	None	**0.092 ***	**0.052 ***	**0.055 ***	**0.023 ***	<0.0068 U	**0.24 J***	**0.082 ***	**0.023 ***
Acenaphthylene	None	**0.085 ***	**0.23 ***	**0.066 ***	**0.17 ***	**0.0098 ***	**1.7 ***	**0.98 ***	**0.021 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-083M	ASYss-084M	ASYss-085M	ASYss-086M	ASYss-087M	ASYss-088M	ASYss-089M	ASYss-090M
Sample Id		ASYss-083M-5757-SO	ASYss-084M-5758-SO	ASYss-085M-5759-SO	ASYss-086M-5760-SO	ASYss-087M-5761-SO	ASYss-088M-5756-SO	ASYss-089M-5763-SO	ASYss-090M-5764-SO
Date		04/02/10	04/02/10	04/02/10	04/02/10	04/02/10	04/05/10	04/05/10	04/05/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Anthracene	None	**0.39 ***	**0.22 ***	**0.14 ***	**0.11 ***	**0.0088 ***	**2.9 ***	**1.7 ***	**0.075 ***
Benz(a)anthracene	None	**0.98 ***	**0.98 ***	**0.63 ***	**0.38 ***	**0.051 ***	**8.9 ***	**5 ***	**0.31 ***
Benzo(a)pyrene	None	**0.87 ***	**1.1 ***	**0.58 ***	**0.42 ***	**0.055 ***	**9 ***	**4.8 ***	**0.29 ***
Benzo(b)fluoranthene	None	**1.3 ***	**2.7 ***	**1.6 ***	**0.75 ***	**0.093 ***	**18 ***	**8.6 ***	**0.37 ***
Benzo(ghi)perylene	None	**0.48 ***	**1.1 ***	**0.88 ***	**0.38 ***	**0.039 ***	**6.1 ***	**3 ***	**0.19 ***
Benzo(k)fluoranthene	None	**0.58 ***	**1.1 ***	**0.74 ***	**0.33 ***	**0.03 ***	**6.2 ***	**3.6 ***	**0.27 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	<4.2 U	NR	NR
Carbazole	None	NR	NR	NR	NR	NR	**0.44 J***	NR	NR
Chrysene	None	**0.99 ***	**1.5 ***	**0.97 ***	**0.45 ***	**0.059 ***	**14 ***	**6.3 ***	**0.31 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	<4.2 U	NR	NR
Dibenz(a,h)anthracene	None	**0.15 ***	**0.32 ***	**0.2 ***	**0.12 ***	**0.013 ***	**2.1 ***	**1.2 ***	**0.037 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	**0.51 J***	NR	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	<4.2 U	NR	NR
Fluoranthene	None	**2.1 ***	**2.1 ***	**1.3 ***	**0.67 ***	**0.091 ***	**11 ***	**5.5 ***	**0.62 ***
Fluorene	None	**0.11 ***	**0.052 ***	**0.046 ***	**0.024 ***	**0.0084 ***	**0.3 J***	**0.14 ***	**0.028 ***
Indeno(1,2,3-cd)pyrene	None	**0.49 ***	**1.1 ***	**0.74 ***	**0.37 ***	**0.037 ***	**5.8 ***	**3.1 ***	**0.2 ***
Naphthalene	None	**0.051 ***	**0.17 ***	**0.058 ***	**0.098 ***	**0.044 ***	**1.4 ***	**0.38 ***	**0.1 ***
Phenanthrene	None	**1.2 ***	**0.59 ***	**0.5 ***	**0.24 ***	**0.055 ***	**2.1 ***	**1.2 ***	**0.37 ***
Pyrene	None	**1.5 ***	**1.7 ***	**1 ***	**0.51 ***	**0.067 ***	**11 ***	**4.8 ***	**0.45 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	<0.034 U	NR	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-091M	ASYss-092M	ASYss-093M	ASYss-094M	ASYss-095M	ASYss-096M	ASYss-097M	ASYss-098M
Sample Id		ASYss-091M-5765-SO	ASYss-092M-5766-SO	ASYss-093M-5767-SO	ASYss-094M-5768-SO	ASYss-095M-5769-SO	ASYss-096M-5770-SO	ASYss-097M-5771-SO	ASYss-098M-5772-SO
Date		04/05/10	04/05/10	04/06/10	04/06/10	04/06/10	04/05/10	04/06/10	04/06/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	10200	9330	12600	13000	11400	9050	9350	10800
Antimony	0.96	0.16 J	0.072 J	0.12 J	0.19 J	0.15 J	0.15 J	0.13 J	0.12 J
Arsenic	15.4	9.1 J	8.3 J	8.6	9.2	9.9	7.9 J	8.2	8.4
Barium	88.4	81.5	57	**90.7 ***	**98.2 ***	**91.9 ***	70.5	75.1	67.8
Beryllium	0.88	0.7 J	0.38 J	0.82	0.8	0.8	0.66 J	0.55	0.42
Cadmium	0	**0.2 J***	**0.12 J***	**0.15 J***	**0.17 J***	**0.18 J***	**0.19 J***	**0.25 ***	**0.15 J***
Calcium	15800	9480	2320	**17800 J***	14400 J	14800 J	9900	2170 J	1800 J
Chromium	17.4	15.3 J	13.2 J	16.5 J	**19.5 J***	**21.4 J***	17.2 J	**18.3 J***	17.3 J
Cobalt	10.4	7 J	6.5 J	6.1	6.3	9.5	4.9 J	10	5.8
Copper	17.7	12.3 J	7.5 J	9.6 J	16.2 J	11.1 J	9.5 J	11.2 J	15.9 J
Iron	23100	17900	17100	19000	21400	**23600 ***	18200	17600	18700
Lead	26.1	**26.5 J***	22.6 J	22.5 J	24.3 J	25.1 J	19.4 J	24.8 J	**39.2 J***
Magnesium	3030	2770	1730	**3530 ***	**3210 ***	**3250 ***	2780	1470	1700
Manganese	1450	714	510	846	891	901	455	723	415
Mercury	0.036	**0.055 J***	**0.06 J***	**0.054 J***	**0.048 J***	**0.048 J***	**0.049 J***	**0.074 J***	**0.098 J***
Nickel	21.1	13.7 J	11.1 J	11.5	13.8	15.2	12.9 J	14	12.6
Potassium	927	810 J	577 J	866	906	848	761 J	610	711 J
Selenium	1.4	1.1 J	0.85 J	0.82 J	0.91 J	0.76 J	0.95 J	0.83 J	0.65 J
Silver	0	**0.045 J***	**0.059 J***	**0.052 J***	**0.047 J***	**0.081 J***	**0.055 J***	**0.072 J***	**0.073 J***
Sodium	123	67.8 J	37.1 J	122	112	117	78.1 J	39.6 J	39.2 J
Thallium	0	**0.15 J***	**0.16 J***	**0.14 J***	**0.15 J***	**0.15 J***	**0.12 J***	**0.16 J***	**0.16 J***
Vanadium	31.1	17.6 J	15.9 J	18.9 J	20.6 J	19.7 J	15.7 J	18.2 J	19.6 J
Zinc	61.8	50.1	39.1	47.3 J	51.8 J	54.9 J	50.3	60.2 J	**62 J***
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	<0.24 U	<0.25 U	**0.014 J***	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
2,6-Dinitrotoluene	None	<0.24 U	<0.25 U	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
3-Nitrotoluene	None	<0.24 U	<0.25 U	**0.12 J***	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.24 U	<0.25 U	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
HMX	None	<0.24 U	<0.25 U	**0.016 J***	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
Nitrocellulose	None	NR	NR	NR	NR	NR	NR	**2.1 J***	NR
Tetryl	None	<0.24 U	<0.25 U	**0.071 J***	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.25 U
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	NR	**0.074 J***	NR
Acenaphthene	None	**0.0085 ***	<0.0068 U	**5.3 ***	**0.012 ***	**0.11 ***	**0.012 ***	**0.023 J***	**0.023 ***
Acenaphthylene	None	**0.019 ***	<0.0068 U	**0.68 ***	**0.026 ***	**0.081 ***	**0.022 ***	**0.014 J***	**0.14 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-091M	ASYss-092M	ASYss-093M	ASYss-094M	ASYss-095M	ASYss-096M	ASYss-097M	ASYss-098M
Sample Id		ASYss-091M-5765-SO	ASYss-092M-5766-SO	ASYss-093M-5767-SO	ASYss-094M-5768-SO	ASYss-095M-5769-SO	ASYss-096M-5770-SO	ASYss-097M-5771-SO	ASYss-098M-5772-SO
Date		04/05/10	04/05/10	04/06/10	04/06/10	04/06/10	04/05/10	04/06/10	04/06/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria								
Anthracene	None	**0.024 ***	**0.0069 ***	**9.7 ***	**0.035 ***	**0.25 ***	**0.041 ***	**0.061 ***	**0.1 ***
Benz(a)anthracene	None	**0.16 ***	**0.031 ***	**17 ***	**0.11 ***	**0.81 ***	**0.21 ***	**0.22 ***	**0.31 ***
Benzo(a)pyrene	None	**0.17 ***	**0.033 ***	**18 ***	**0.078 ***	**0.83 ***	**0.22 ***	**0.22 ***	**0.34 ***
Benzo(b)fluoranthene	None	**0.27 ***	**0.065 ***	**21 ***	**0.17 ***	**1.2 ***	**0.35 ***	**0.33 ***	**0.52 ***
Benzo(ghi)perylene	None	**0.11 ***	**0.028 ***	**11 ***	**0.075 ***	**0.58 ***	**0.17 ***	**0.16 ***	**0.26 ***
Benzo(k)fluoranthene	None	**0.13 ***	**0.024 ***	**11 ***	**0.06 ***	**0.51 ***	**0.13 ***	**0.13 ***	**0.23 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	NR	**0.024 J***	NR
Carbazole	None	NR	NR	NR	NR	NR	NR	**0.043 J***	NR
Chrysene	None	**0.18 ***	**0.041 ***	**18 ***	**0.12 ***	**0.9 ***	**0.21 ***	**0.23 ***	**0.32 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	NR	**0.027 J***	NR
Dibenz(a,h)anthracene	None	**0.025 ***	**0.0078 ***	**2.8 ***	<0.0068 U	**0.11 ***	**0.046 ***	**0.046 J***	**0.062 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	NR	**0.026 J***	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	NR	**0.023 J***	NR
Fluoranthene	None	**0.24 ***	**0.063 ***	**43 ***	**0.2 ***	**2.1 ***	**0.38 ***	**0.55 ***	**0.55 ***
Fluorene	None	**0.014 ***	**0.0087 ***	**4.3 ***	**0.016 ***	**0.1 ***	**0.016 ***	**0.031 J***	**0.012 ***
Indeno(1,2,3-cd)pyrene	None	**0.11 ***	**0.026 ***	**10 ***	**0.0072 ***	**0.5 ***	**0.16 ***	**0.15 ***	**0.25 ***
Naphthalene	None	**0.065 ***	**0.028 ***	<0.34 U	**0.1 ***	**0.088 ***	**0.051 ***	**0.059 ***	**0.04 ***
Phenanthrene	None	**0.094 ***	**0.04 ***	**21 ***	**0.13 ***	**1 ***	**0.15 ***	**0.27 ***	**0.15 ***
Pyrene	None	**0.21 ***	**0.046 ***	**33 ***	**0.15 ***	**1.5 ***	**0.28 ***	**0.41 ***	**0.4 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	NR	<0.034 U	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-099M	ASYss-100M	ASYss-101M	ASYss-102M	ASYss-103M	ASYss-103M	ASYss-111M	ASYss-112M
Sample Id		ASYss-099M-5773-SO	ASYss-100M-5774-SO	ASYss-101M-5775-SO	ASYss-102M-5776-SO	ASYss-103M-6213-FD	ASYss-103M-5777-SO	ASYss-111M-5835-SO	ASYss-112M-5836-SO
Date		04/06/10	04/06/10	04/06/10	04/06/10	04/05/10	04/05/10	04/20/11	04/20/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	11600	12200	11300	10400	10400	11000	12000 J	11100 J
Antimony	0.96	0.099 J	0.12 J	0.12 J	0.078 J	0.14 J	0.14 J	0.099 J	0.098 J
Arsenic	15.4	8.6	6.6	6.3	4.6	10.7 J	9.8 J	10.1	11.4
Barium	88.4	70.3	75.7	83.4	52.9	66.3	74.6	**118 ***	**104 ***
Beryllium	0.88	0.51	0.72	0.74	0.39	0.55 J	0.66 J	**1.4 J***	**1 J***
Cadmium	0	**0.11 J***	**0.21 ***	**0.23 ***	**0.16 J***	**0.16 J***	**0.16 J***	**0.19 ***	**0.12 J***
Calcium	15800	5090 J	12300 J	10900 J	2220 J	4190	8500	**39600 ***	**28100 ***
Chromium	17.4	17 J	17.3 J	16.3 J	12.3 J	16.1 J	16.7 J	**30.2 ***	**19.9 ***
Cobalt	10.4	6.6	6.1	5.5	3.4	6.2 J	5.6 J	9.1	9.8
Copper	17.7	10.3 J	8.4 J	8.8 J	7.2 J	16.2 J	11.1 J	**18.4 ***	17.4
Iron	23100	20300	15900	16400	12400	20200	19900	20500 J	21700 J
Lead	26.1	15.3 J	18.5 J	21.2 J	16.2 J	21.9 J	23.6 J	15	14.8
Magnesium	3030	2280	3020	2710	1390	2480	2900	**6430 J***	**5080 J***
Manganese	1450	662	487	476	178	265	314	1250	924
Mercury	0.036	**0.042 J***	**0.058 J***	**0.052 J***	**0.065 J***	**0.098 J***	**0.12 ***	**0.046 J***	<0.1 U
Nickel	21.1	14.1	13.8	12.9	9.9	14.8 J	14.5 J	**24.1 J***	**22.4 J***
Potassium	927	743 J	797	861	612	759 J	742 J	**1180 ***	**1170 ***
Selenium	1.4	0.73 J	0.81 J	0.99 J	0.71 J	0.91 J	0.97 J	1.1	1.1
Silver	0	**0.046 J***	**1 ***	**0.5 J***	**0.06 J***	**0.066 J***	**0.092 J***	**0.034 J***	**0.024 J***
Sodium	123	55.1 J	101 J	85.9 J	38.4 J	42.7 J	62.7 J	**185 ***	114
Thallium	0	**0.15 J***	**0.14 J***	**0.15 J***	**0.15 J***	**0.17 J***	**0.16 J***	**0.14 J***	**0.13 J***
Vanadium	31.1	20.4 J	16.7 J	16.6 J	16 J	19.2 J	18.1 J	16.3	17.4
Zinc	61.8	42.7 J	60.5 J	**69.4 J***	42.4 J	49.4	49	**61.8 ***	54
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
2,6-Dinitrotoluene	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
3-Nitrotoluene	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
4-Amino-2,6-Dinitrotoluene	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
HMX	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
Nitrocellulose	None	NR	NR	NR	NR	NR	NR	NR	NR
Tetryl	None	<0.24 U	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U	NR	NR
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	NR	NR	NR
Acenaphthene	None	**0.02 ***	**0.033 ***	**0.21 ***	**0.023 ***	<0.0068 U	<0.0068 U	**0.026 ***	**0.015 ***
Acenaphthylene	None	**0.13 ***	**0.036 ***	**0.15 ***	**0.018 ***	**0.029 ***	**0.018 ***	**0.29 ***	**0.12 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-099M	ASYss-100M	ASYss-101M	ASYss-102M	ASYss-103M	ASYss-103M	ASYss-111M	ASYss-112M
Sample Id		ASYss-099M-5773-SO	ASYss-100M-5774-SO	ASYss-101M-5775-SO	ASYss-102M-5776-SO	ASYss-103M-6213-FD	ASYss-103M-5777-SO	ASYss-111M-5835-SO	ASYss-112M-5836-SO
Date		04/06/10	04/06/10	04/06/10	04/06/10	04/05/10	04/05/10	04/20/11	04/20/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Anthracene	None	**0.17 ***	**0.085 ***	**0.9 J***	**0.066 ***	**0.042 ***	**0.025 ***	**0.56 ***	**0.22 ***
Benz(a)anthracene	None	**0.51 ***	**0.4 ***	**1.7 J***	**0.25 ***	**0.19 ***	**0.15 ***	**1.5 ***	**0.66 ***
Benzo(a)pyrene	None	**0.47 ***	**0.4 ***	**1.4 J***	**0.24 ***	**0.17 ***	**0.13 ***	**1.4 ***	**0.72 ***
Benzo(b)fluoranthene	None	**0.78 ***	**0.57 ***	**1.9 J***	**0.38 ***	**0.27 ***	**0.21 ***	**3.2 ***	**1.4 ***
Benzo(ghi)perylene	None	**0.3 ***	**0.29 ***	**0.9 ***	**0.16 ***	**0.11 ***	**0.091 ***	**1 ***	**0.56 ***
Benzo(k)fluoranthene	None	**0.3 ***	**0.25 ***	**0.93 ***	**0.14 ***	**0.14 ***	**0.097 ***	**0.98 ***	**0.59 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Carbazole	None	NR	NR	NR	NR	NR	NR	NR	NR
Chrysene	None	**0.54 ***	**0.41 ***	**1.7 J***	**0.26 ***	**0.21 ***	**0.16 ***	**1.9 ***	**0.93 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	**0.088 ***	**0.073 ***	**0.26 ***	**0.035 ***	**0.036 ***	**0.03 ***	**0.37 ***	**0.19 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	NR	NR	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Fluoranthene	None	**0.91 ***	**0.89 ***	**4.4 J***	**0.65 ***	**0.38 ***	**0.3 ***	**1.8 ***	**0.91 ***
Fluorene	None	**0.029 ***	**0.035 ***	**0.35 ***	**0.028 ***	**0.014 ***	**0.01 ***	**0.036 ***	**0.019 ***
Indeno(1,2,3-cd)pyrene	None	**0.3 ***	**0.28 ***	**0.83 ***	**0.15 ***	**0.12 ***	**0.09 ***	**0.98 ***	**0.53 ***
Naphthalene	None	**0.032 ***	**0.055 ***	**0.076 ***	**0.027 ***	**0.05 ***	**0.042 ***	**0.11 ***	**0.053 ***
Phenanthrene	None	**0.3 ***	**0.38 ***	**3 J***	**0.32 ***	**0.12 ***	**0.1 ***	**0.29 ***	**0.18 ***
Pyrene	None	**0.69 ***	**0.66 ***	**3 J***	**0.46 ***	**0.25 ***	**0.2 ***	**1.6 ***	**0.8 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	NR	NR	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-113M	ASYss-114M	ASYss-115M	ASYss-116M	ASYss-117M	ASYss-118M	ASYss-119M	ASYss-120M
Sample Id		ASYss-113M-5837-SO	ASYss-114M-5838-SO	ASYss-115M-5839-SO	ASYss-116M-5840-SO	ASYss-117M-5841-SO	ASYss-118M-5842-SO	ASYss-119M-5843-SO	ASYss-120M-5844-SO
Date		04/20/11	04/20/11	04/20/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	10900 J	11500 J	14200 J	**19100 J***	**18000 J***	16400 J	14000 J	16900 J
Antimony	0.96	0.096 J	0.1 J	0.35 J	0.083 J	0.099 J	0.13 J	0.14 J	0.17 J
Arsenic	15.4	11.6	12.7	6.3	6.8	8.2	11.7	11.4	10.7
Barium	88.4	**101 ***	**118 ***	**215 ***	**212 ***	**193 ***	**194 ***	**127 ***	**187 ***
Beryllium	0.88	**0.99 J***	**1.2 J***	**2.5 J***	**3.8 J***	**3.2 J***	**2.3 J***	**1.6 J***	**2 J***
Cadmium	0	**0.11 J***	**0.49 ***	**0.39 ***	**0.12 J***	**0.16 J***	**0.23 ***	**0.15 J***	**0.25 ***
Calcium	15800	**24600 ***	**36100 ***	**106000 ***	**115000 ***	**86600 ***	**65000 ***	**44500 ***	**58000 ***
Chromium	17.4	**23.9 ***	**23.7 ***	**43.6 ***	**42.3 ***	**39.8 ***	**42.3 ***	**41.5 ***	**25.3 ***
Cobalt	10.4	**13.2 ***	8.7	3.4	4.7	6.4	5.8	7.8	7.4
Copper	17.7	**18.2 ***	**17.9 ***	**20.1 ***	10.1	16	12.6	15.7	**250 ***
Iron	23100	22000 J	21500 J	13100 J	17900 J	17600 J	18000 J	21300 J	21500 J
Lead	26.1	15.7	14.7	**59.6 ***	11.1	15	15.9	17.5	**32.9 ***
Magnesium	3030	**4820 J***	**5730 J***	**9820 J***	**15600 J***	**12100 J***	**9520 J***	**6860 J***	**8280 J***
Manganese	1450	939	1260	**2130 ***	**2220 ***	**2030 ***	**1760 ***	1170	**1950 ***
Mercury	0.036	<0.091 U	**0.048 J***	0.036 J	<0.086 U	0.027 J	**0.038 J***	0.019 J	**0.046 J***
Nickel	21.1	**25.3 J***	**21.8 J***	**25.7 J***	**22 J***	**23.9 J***	**26.3 J***	**29.1 J***	21 J
Potassium	927	**1130 ***	**1180 ***	**1540 ***	**1810 ***	**1550 ***	**1440 ***	**1300 ***	**1520 ***
Selenium	1.4	1	1.2	**1.7 ***	**2 ***	**1.7 ***	**1.5 ***	1.2	**1.7 ***
Silver	0	**0.025 J***	**0.038 J***	**0.11 J***	**0.049 J***	**0.14 J***	<0.21 UJ	<0.085 UJ	<0.091 UJ
Sodium	123	103	**177 ***	**2430 ***	**646 ***	**473 ***	**365 ***	**211 ***	**261 ***
Thallium	0	**0.12 J***	**0.11 J***	**0.16 J***	**0.092 J***	**0.12 J***	**0.2 ***	**0.15 J***	**0.13 J***
Vanadium	31.1	16.9	16.8	10.1	15.4	15.4	13.1	14.8	15.5
Zinc	61.8	58.4	55.7	**71.4 ***	28.3	45.8	47.6	48.9	**101 ***
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	NR	NR	NR	NR	NR	NR	NR	NR
2,6-Dinitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
3-Nitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
4-Amino-2,6-Dinitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
HMX	None	NR	NR	NR	NR	NR	NR	NR	NR
Nitrocellulose	None	NR	NR	NR	NR	NR	NR	NR	NR
Tetryl	None	NR	NR	NR	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	NR	NR	NR
Acenaphthene	None	**0.097 ***	**0.029 ***	<0.027 U	<0.14 U	<0.069 U	**0.23 ***	**0.15 ***	**0.053 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-113M	ASYss-114M	ASYss-115M	ASYss-116M	ASYss-117M	ASYss-118M	ASYss-119M	ASYss-120M
Sample Id		ASYss-113M-5837-SO	ASYss-114M-5838-SO	ASYss-115M-5839-SO	ASYss-116M-5840-SO	ASYss-117M-5841-SO	ASYss-118M-5842-SO	ASYss-119M-5843-SO	ASYss-120M-5844-SO
Date		04/20/11	04/20/11	04/20/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Acenaphthylene	None	**0.14 ***	**0.35 ***	**0.044 ***	**1.7 ***	**1.2 ***	**2.4 ***	**1.3 ***	**0.35 ***
Anthracene	None	**0.46 ***	**0.63 ***	**0.086 ***	**3.1 ***	**2 ***	**5.9 ***	**2.1 ***	**0.57 ***
Benz(a)anthracene	None	**1.2 ***	**1.8 ***	**0.47 ***	**7.3 ***	**4.6 ***	**13 ***	**5 ***	**1.8 ***
Benzo(a)pyrene	None	**1.1 ***	**1.6 ***	**0.56 ***	**8.3 ***	**5.1 ***	**14 ***	**5.4 ***	**1.7 ***
Benzo(b)fluoranthene	None	**2.1 ***	**3.6 ***	**0.87 ***	**15 ***	**9.9 ***	**26 ***	**10 ***	**3.6 ***
Benzo(ghi)perylene	None	**0.85 ***	**1.1 ***	**0.44 ***	**5.6 ***	**3.4 ***	**9.3 ***	**3.8 ***	**1.3 ***
Benzo(k)fluoranthene	None	**0.87 ***	**1.1 ***	**0.47 ***	**7 ***	**3.9 ***	**9.3 ***	**4.5 ***	**1.4 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Carbazole	None	NR	NR	NR	NR	NR	NR	NR	NR
Chrysene	None	**1.6 ***	**2.2 ***	**0.8 ***	**13 ***	**7 ***	**19 ***	**7.2 ***	**2.2 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	**0.27 ***	**0.36 ***	**0.12 ***	**2 ***	**1.2 ***	**3.3 ***	**1.4 ***	**0.5 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	NR	NR	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Fluoranthene	None	**2 ***	**2.5 ***	**0.8 ***	**8.1 ***	**4.8 ***	**15 ***	**5.8 ***	**2.8 ***
Fluorene	None	**0.12 ***	**0.047 ***	<0.027 U	**0.18 ***	**0.11 ***	**0.39 ***	**0.22 ***	**0.079 ***
Indeno(1,2,3-cd)pyrene	None	**0.77 ***	**1.1 ***	**0.38 ***	**5.5 ***	**3.3 ***	**8.7 ***	**3.6 ***	**1.2 ***
Naphthalene	None	**0.068 ***	**0.056 ***	**0.45 ***	**0.17 ***	**0.13 ***	**0.69 ***	**0.42 ***	**0.24 ***
Phenanthrene	None	**0.93 ***	**0.32 ***	**0.45 ***	**1 ***	**0.46 ***	**2.3 ***	**1.2 ***	**0.61 ***
Pyrene	None	**1.6 ***	**2.3 ***	**0.7 ***	**8.5 ***	**5.7 ***	**16 ***	**5.7 ***	**2.5 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	NR	NR	NR

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-121M	ASYss-122M	ASYss-123M	ASYss-124M	ASYss-125M	ASYss-125M	ASYss-126M	ASYss-126M
Sample Id		ASYss-121M-5845-SO	ASYss-122M-5846-SO	ASYss-123M-5847-SO	ASYss-124M-5848-SO	ASYss-125M-6238-FD	ASYss-125M-5849-SO	ASYss-126M-6239-FD	ASYss-126M-5850-SO
Date		04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Inorganic Chemicals									
Aluminum	17700	**19600 J***	16200 J	**23300 J***	17400 J	11000 J	11200 J	17700 J	16100 J
Antimony	0.96	0.17 J	0.12 J	0.12 J	0.24 J	0.14 J	0.15 J	0.089 J	0.099 J
Arsenic	15.4	9.3	8.4	3.7	10.2	8.1	9.8	6.6	7
Barium	88.4	**235 ***	**157 ***	**301 ***	**164 ***	82.9	87	**154 ***	**125 ***
Beryllium	0.88	**2.9 J***	**1.9 J***	**3.8 J***	**1.9 J***	0.66 J	0.67 J	**1.8 J***	**1.4 J***
Cadmium	0	**0.25 ***	**0.2 ***	**0.23 ***	**0.24 ***	**0.23 ***	**0.24 ***	**0.24 ***	**0.26 ***
Calcium	15800	**104000 ***	**68100 ***	**155000 ***	**53300 ***	8940	11500	**51200 ***	**42800 ***
Chromium	17.4	**41.5 ***	**31 ***	**25.7 ***	**22.9 ***	17.3	16.6	**20.7 ***	**20.3 ***
Cobalt	10.4	4.3	5.2	2	5.9	5.3	6.2	3.1	3.4
Copper	17.7	13.7	**27.1 ***	9	12.8	11.8	10.9	8.7	8.7
Iron	23100	15800 J	14000 J	8190 J	22600 J	17500 J	21300 J	16000 J	17800 J
Lead	26.1	25.4	23.9	23.8	**26.8 ***	**39.2 ***	**42.7 ***	21.5	19
Magnesium	3030	**13000 J***	**8750 J***	**17100 J***	**7230 J***	2260 J	2470 J	**6840 J***	**5580 J***
Manganese	1450	**2420 ***	**1480 ***	**3040 ***	**1610 ***	698	948	**1470 ***	1110
Mercury	0.036	0.029 J	0.032 J	0.019 J	**0.046 J***	**0.055 J***	**0.046 J***	**0.038 J***	**0.041 J***
Nickel	21.1	**21.8 J***	20.8 J	13 J	15.6 J	11.8 J	11.7 J	11.5 J	11.9 J
Potassium	927	**1450 ***	**1190 ***	**1600 ***	**1180 ***	826	826	**1370 ***	**1210 ***
Selenium	1.4	**1.9 ***	**1.4 ***	**2 ***	**1.5 ***	0.81	0.81	**1.5 ***	1.3
Silver	0	<0.15 UJ	<0.051 UJ	<0.031 UJ	<0.27 UJ	<0.061 UJ	<0.052 UJ	<0.04 UJ	<0.041 UJ
Sodium	123	**475 ***	**274 ***	**567 ***	**237 ***	62 J	66.5 J	**271 ***	**186 ***
Thallium	0	**0.28 ***	**0.086 J***	<0.21 U	**0.15 J***	**0.14 J***	**0.14 J***	**0.13 J***	**0.13 J***
Vanadium	31.1	11.5	12.6	7.1	17.7	17.9	19.7	16.3	17.4
Zinc	61.8	42	49.8	30.4	52	**65 ***	**64.7 ***	58.3	**64.8 ***
Explosives/Propellants									
1,3,5-Trinitrobenzene	None	NR	NR	NR	NR	NR	NR	NR	NR
2,6-Dinitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
3-Nitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
4-Amino-2,6-Dinitrotoluene	None	NR	NR	NR	NR	NR	NR	NR	NR
HMX	None	NR	NR	NR	NR	NR	NR	NR	NR
Nitrocellulose	None	NR	NR	NR	NR	NR	NR	NR	NR
Tetryl	None	NR	NR	NR	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds									
2-Methylnaphthalene	None	NR	NR	NR	NR	NR	NR	NR	NR
Acenaphthene	None	**0.068 ***	**0.18 ***	**0.39 J***	**0.14 ***	**0.0078 ***	**0.0071 ***	**8.8 ***	**10 ***

Table 4-12. Analytes Detected in PBA08 RI ISM Surface Soil Samples (continued)

Location		ASYss-121M	ASYss-122M	ASYss-123M	ASYss-124M	ASYss-125M	ASYss-125M	ASYss-126M	ASYss-126M
Sample Id		ASYss-121M-5845-SO	ASYss-122M-5846-SO	ASYss-123M-5847-SO	ASYss-124M-5848-SO	ASYss-125M-6238-FD	ASYss-125M-5849-SO	ASYss-126M-6239-FD	ASYss-126M-5850-SO
Date		04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11	04/21/11
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed		TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs	TAL Metals PAHs
Analyte (mg/kg)	Background Criteria								
Acenaphthylene	None	**0.87 ***	**0.26 ***	**0.13 ***	**0.6 ***	**0.053 ***	**0.04 ***	**1.5 ***	**1.8 ***
Anthracene	None	**1.3 ***	**0.89 ***	**0.88 J***	**2 ***	**0.032 ***	**0.027 ***	**19 ***	**23 ***
Benz(a)anthracene	None	**3.1 ***	**3.3 ***	**4.4 J***	**3.6 ***	**0.12 ***	**0.11 ***	**47 ***	**51 ***
Benzo(a)pyrene	None	**3.1 ***	**3.5 ***	**4.5 J***	**3.1 ***	**0.14 ***	**0.12 ***	**43 ***	**50 ***
Benzo(b)fluoranthene	None	**6.8 ***	**4.7 ***	**6.3 J***	**5.1 ***	**0.2 ***	**0.2 ***	**56 ***	**51 ***
Benzo(ghi)perylene	None	**2.2 ***	**2.3 ***	**3.2 J***	**1.9 ***	**0.1 ***	**0.093 ***	**25 ***	**29 ***
Benzo(k)fluoranthene	None	**2.2 ***	**3.1 ***	**3.3 J***	**2.9 ***	**0.14 ***	**0.11 ***	**26 ***	**37 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Carbazole	None	NR	NR	NR	NR	NR	NR	NR	NR
Chrysene	None	**3.7 ***	**3.6 ***	**5 J***	**4.7 ***	**0.17 ***	**0.14 ***	**45 ***	**49 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	**0.7 ***	**0.72 ***	**0.88 J***	**0.5 ***	**0.029 ***	**0.024 ***	**6.9 ***	**7.7 ***
Dibenzofuran	None	NR	NR	NR	NR	NR	NR	NR	NR
Diethyl phthalate	None	NR	NR	NR	NR	NR	NR	NR	NR
Fluoranthene	None	**3.5 ***	**6.6 ***	**9 J***	**5.5 ***	**0.19 ***	**0.17 ***	**110 ***	**130 ***
Fluorene	None	**0.1 ***	**0.13 ***	**0.28 J***	**0.22 ***	**0.0097 ***	**0.0086 ***	**7 ***	**8.5 ***
Indeno(1,2,3-cd)pyrene	None	**2.2 ***	**2.2 ***	**2.8 J***	**1.8 ***	**0.099 ***	**0.089 ***	**23 ***	**26 ***
Naphthalene	None	**1.1 ***	**0.4 ***	**0.18 J***	**0.5 ***	**0.069 ***	**0.07 ***	<0.69 U	<1.4 U
Phenanthrene	None	**0.9 ***	**1.6 ***	**3.3 J***	**1.4 ***	**0.084 ***	**0.08 ***	**47 ***	**53 ***
Pyrene	None	**3.4 ***	**5.2 ***	**7.4 J***	**4.5 ***	**0.16 ***	**0.14 ***	**86 ***	**94 ***
Pesticides/PCBs									
PCB-1260	None	NR	NR	NR	NR	NR	NR	NR	NR

[a] Only detected analytes are presented in the table.
[b] Background concentrations are published in the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b).
ft = Feet.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
ID = Identification.
J = estimated value less than reporting limits.
mg/kg = Milligrams per kilogram.
NR = Not reported/not analyzed.
PAH = Polycyclic aromatic hydrocarbon.
PCB = Polychlorinated biphenyl.
RVAAP = Ravenna Army Ammunition Plant.
TAL = Target Analyte List.
U= Non-detectable concentration.
UJ= Non-detectable concentration, reporting limit estimated.
*** = Result exceeds background concentration.**
< = Less than.

Table 4-13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples

Location		**ASYsb-045**	**ASYsb-045**	**ASYsb-046**	**ASYsb-047**	**ASYsb-048**
Sample ID		**ASYsb-045-6221-FD**	**ASYsb-045-5660-SO**	**ASYsb-046-5664-SO**	**ASYsb-047-5668-SO**	**ASYsb-048-6222-FD**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**
Depth (ft)		**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	17700	**28700 ***	**20200 ***	**29000 ***	16500	**18700 ***
Antimony	0.96	0.087 J	0.086 J	<0.61 R	0.11 J	0.18 J
Arsenic	15.4	5 J	6.6 J	1.7 J	5.6 J	14.4 J
Barium	88.4	**445 ***	**197 ***	**330 ***	**200 ***	**284 ***
Beryllium	0.88	**3.5 ***	**2.2 ***	**3.9 ***	**2.6 ***	**2.3 ***
Cadmium	0	**0.25 J***	**0.23 J***	**0.026 J***	**0.16 J***	**0.37 ***
Calcium	15800	**165000 J***	**68800 J***	**207000 J***	**69400 J***	**108000 J***
Chromium	17.4	20 *	10.7	11	9.2	10.4
Cobalt	10.4	4	7	0.28 J	3.3	3.4
Copper	17.7	6.3 J	6.1 J	2.2 J	9.5 J	11.1 J
Iron	23100	9390	13600	3580	10600	14000
Lead	26.1	**78.5 J***	21.3 J	2.2 J	21.3 J	**26.9 J***
Magnesium	3030	**20100 J***	**11200 J***	**35100 J***	**9370 J***	**12700 J***
Manganese	1450	**3420 ***	**1670 ***	**3410 ***	**1920 ***	**3200 ***
Mercury	0.036	0.032 J	**0.039 J***	<0.12 U	<0.13 U	<0.13 U
Nickel	21.1	4.2 J	7 J	0.95 J	7.3 J	10 J
Potassium	927	**1870 J***	**955 J***	**1320 J***	**1370 J***	**1390 J***
Selenium	1.4	**3.5 J***	**1.9 J***	**4.2 J***	**2 J***	**2.9 J***
Silver	0	**0.043 J***	**0.037 J***	**0.033 J***	**0.032 J***	**1.4 ***
Sodium	123	**662 ***	**328 ***	**902 ***	**377 ***	**494 ***
Thallium	0	**0.08 J***	**0.15 J***	<0.24 U	<0.26 U	**0.32 ***
Vanadium	31.1	10.1 J	18.7 J	6.6 J	11.1 J	8.8 J
Zinc	61.8	**82.8 ***	**72.9 ***	<4.5 UJ	34.6	**74.6 ***
Explosives/Propellants						
1,3,5-Trinitrobenzene	None	<0.25 U	<0.25 U	<0.24 U	**0.013 J***	<0.25 U
2,4-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U
2,6-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.24 U	<0.25 U	**0.55 J***
3-Nitrotoluene	None	<0.25 U	<0.25 UJ	<0.24 UJ	<0.25 UJ	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U
HMX	None	<0.25 U	<0.25 U	<0.24 U	<0.25 U	<0.25 U
Nitrocellulose	None	NR	NR	**1.2 J***	NR	NR
Nitroglycerin	None	<0.5 U	<0.5 U	<0.48 U	<0.5 U	**0.12 J***
PETN	None	<0.5 U	<0.5 U	<0.48 U	<0.5 U	<0.5 U
Tetryl	None	<0.25 U	<0.25 UJ	<0.24 UJ	<0.25 UJ	<0.25 U

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		ASYsb-045	ASYsb-045	ASYsb-046	ASYsb-047	ASYsb-048
Sample ID		ASYsb-045-6221-FD	ASYsb-045-5660-SO	ASYsb-046-5664-SO	ASYsb-047-5668-SO	ASYsb-048-6222-FD
Date		04/05/10	04/05/10	04/05/10	04/05/10	04/05/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed [a]	Background Criteria[b]	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)						
Semi-volatile Organic Compounds						
2-Methylnaphthalene	None	NR	NR	**0.032 J***	NR	NR
Acenaphthene	None	<0.0088 U	<0.0088 U	<0.061 U	**0.13 ***	**0.13 ***
Acenaphthylene	None	**0.015 ***	**0.013 ***	**0.0087 J***	**0.33 ***	**0.71 ***
Anthracene	None	**0.018 ***	**0.012 ***	**0.047 J***	**0.81 ***	**1.2 ***
Benz(a)anthracene	None	**0.062 ***	**0.04 ***	**0.2 ***	**2.5 ***	**3.6 ***
Benzo(a)pyrene	None	**0.079 ***	**0.046 ***	**0.28 ***	**2.5 ***	**3.8 ***
Benzo(b) fluoranthene	None	**0.13 ***	**0.092 ***	**0.59 ***	**4.9 ***	**8.5 ***
Benzo(ghi) perylene	None	**0.077 ***	**0.036 ***	**0.28 ***	**2.1 ***	**4.1 ***
Benzo(k) fluoranthene	None	**0.064 ***	**0.035 ***	**0.23 ***	**1.4 ***	**2.3 ***
Bis(2-ethylhexyl) phthalate	None	NR	NR	<0.4 UJ	NR	NR
Chrysene	None	**0.086 ***	**0.063 ***	**0.41 ***	**3.2 ***	**4.9 ***
Di-n-butyl phthalate	None	NR	NR	<0.4 UJ	NR	NR
Dibenz(a,h)anthracene	None	<0.0088 U	<0.0088 U	**0.07 ***	**0.66 ***	**1.3 ***
Fluoranthene	None	**0.12 ***	**0.076 ***	**0.29 ***	**4.6 ***	**4 ***
Fluorene	None	<0.0088 U	<0.0088 U	<0.061 U	**0.11 ***	**0.13 ***
Indeno(1,2,3-cd)pyrene	None	**0.059 ***	**0.032 ***	**0.24 ***	**1.8 ***	**3.2 ***
Naphthalene	None	**0.024 ***	**0.013 ***	**0.026 J***	**0.19 ***	**4.2 ***
Phenanthrene	None	**0.043 ***	**0.026 ***	**0.05 J***	**1.5 ***	**2.1 ***
Pyrene	None	**0.1 ***	**0.06 ***	**0.3 ***	**3.7 ***	**3.7 ***
Volatile Organic Compounds						
Carbon disulfide	None	NR	NR	**0.00099 J***	NR	NR
Toluene	None	NR	NR	<0.0061 U	NR	NR

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		ASYsb-048	ASYsb-049	ASYsb-050	ASYsb-052	ASYsb-053
Sample ID		ASYsb-048-5672-SO	ASYsb-049-5676-SO	ASYsb-050-5680-SO	ASYsb-052-5688-SO	ASYsb-053-5692-SO
Date		04/05/10	04/05/10	04/07/10	04/06/10	04/07/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed [a]		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria[b]					
Inorganic Chemicals						
Aluminum	17700	17700	**18900 ***	9140	11600	10000
Antimony	0.96	0.15 J	0.073 J	<0.65 UJ	0.13 J	0.11 J
Arsenic	15.4	14 J	5.1 J	5.5 J	13.4	9.8 J
Barium	88.4	**231 ***	**205 ***	64.3	79.4	49.1
Beryllium	0.88	**2.3 ***	**2 ***	0.48	0.56	0.44
Cadmium	0	**0.62 ***	**0.19 J***	**0.095 J***	**0.041 J***	**0.34 ***
Calcium	15800	**91600 J***	**90900 J***	2750	3340 J	1810
Chromium	17.4	9.4	8.4	11.3	15.5 J	13.2
Cobalt	10.4	4.7	3	5.2 J	5.3	5.4 J
Copper	17.7	11.3	6.6 J	5.3	15 J	11.7
Iron	23100	12000	10100	15400	**24700 ***	18800
Lead	26.1	24.7 J	20.7 J	13.3 J	12.7 J	15.7 J
Magnesium	3030	**12300 J***	**12300 J***	1490	1950	1920
Manganese	1450	**2460 ***	**1760 ***	232	106	115
Mercury	0.036	**0.05 J***	0.028 J	0.033 J	0.034 J	0.029 J
Nickel	21.1	10 J	5.8 J	9.8 J	14.4	13 J
Potassium	927	**1150 J***	**1120 J***	714 J	721	491 J
Selenium	1.4	**3.1 J***	**2 J***	0.92	0.79 J	1.2
Silver	0	**1.3 ***	**0.031 J***	**0.057 J***	**0.028 J***	**0.24 J***
Sodium	123	**475 ***	**391 ***	<42.3 UJ	35.7 J	<40.8 UJ
Thallium	0	**0.36 ***	**0.074 J***	**0.15 J***	**0.16 J***	**0.15 J***
Vanadium	31.1	7.4 J	11.6 J	16.3 J	23.3 J	18.2 J
Zinc	61.8	**71.1 ***	32.1	37.2	41.3 J	**90.6 ***
Explosives/Propellants						
1,3,5-Trinitrobenzene	None	<0.25 U	**0.015 J***	<0.25 U	<0.24 U	<0.25 U
2,4-Dinitrotoluene	None	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
2,6-Dinitrotoluene	None	**0.56 J***	<0.25 U	<0.25 U	<0.24 U	<0.25 U
3-Nitrotoluene	None	**0.14 J***	<0.25 U	<0.25 U	<0.24 U	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.25 U	**0.059 J***	<0.25 U	<0.24 U	<0.25 U
HMX	None	<0.25 U	<0.25 U	<0.25 U	<0.24 U	<0.25 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Nitroglycerin	None	<0.5 U	<0.5 U	<0.5 U	<0.47 U	<0.5 U
PETN	None	<0.5 U	<0.5 U	<0.5 U	<0.47 U	<0.5 U
Tetryl	None	**0.051 J***	**0.045 J***	<0.25 U	<0.24 U	<0.25 U

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		**ASYsb-048**	**ASYsb-049**	**ASYsb-050**	**ASYsb-052**	**ASYsb-053**
Sample ID		**ASYsb-048-5672-SO**	**ASYsb-049-5676-SO**	**ASYsb-050-5680-SO**	**ASYsb-052-5688-SO**	**ASYsb-053-5692-SO**
Date		**04/05/10**	**04/05/10**	**04/07/10**	**04/06/10**	**04/07/10**
Depth (ft)		**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds						
2-Methylnaphthalene	None	NR	NR	NR	NR	NR
Acenaphthene	None	**0.093 ***	**0.022 ***	<0.0087 U	<0.0085 U	<0.0091 U
Acenaphthylene	None	**0.75 ***	**0.065 ***	<0.0087 U	<0.0085 U	<0.0091 U
Anthracene	None	**1.2 ***	**0.079 ***	<0.0087 U	<0.0085 U	<0.0091 U
Benz(a)anthracene	None	**3.5 ***	**0.23 ***	<0.0087 U	**0.031 ***	**0.024 ***
Benzo(a)pyrene	None	**4.5 ***	**0.24 ***	<0.0087 U	**0.034 ***	**0.028 ***
Benzo(b)fluoranthene	None	**8.4 ***	**0.36 ***	<0.0087 U	**0.055 ***	**0.042 ***
Benzo(ghi)perylene	None	**4.3 ***	**0.19 ***	<0.0087 U	**0.019 ***	**0.019 ***
Benzo(k)fluoranthene	None	**3.4 ***	**0.13 ***	<0.0087 U	**0.027 ***	**0.017 ***
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	**5.7 ***	**0.22 ***	<0.0087 U	**0.036 ***	**0.032 ***
Di-n-butyl phthalate	None	NR	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	**1.2 ***	**0.042 ***	<0.0087 U	<0.0085 U	<0.0091 U
Fluoranthene	None	**4.6 ***	**0.45 ***	**0.0098 ***	**0.049 ***	**0.045 ***
Fluorene	None	**0.13 ***	**0.022 ***	<0.0087 U	<0.0085 U	<0.0091 U
Indeno(1,2,3-cd)pyrene	None	**3.6 ***	**0.17 ***	<0.0087 U	**0.019 ***	**0.018 ***
Naphthalene	None	**3 ***	**0.046 ***	<0.0087 U	<0.0085 U	**0.024 ***
Phenanthrene	None	**2 ***	**0.19 ***	<0.0087 U	**0.018 ***	**0.025 ***
Pyrene	None	**4 ***	**0.34 ***	<0.0087 U	**0.04 ***	**0.037 ***
Volatile Organic Compounds						
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		ASYsb-054	ASYsb-056	ASYsb-057	ASYsb-058	ASYsb-059
Sample ID		ASYsb-054-5696-SO	ASYsb-056-5702-SO	ASYsb-057-5706-SO	ASYsb-058-5710-SO	ASYsb-059-5714-SO
Date		04/06/10	04/07/10	04/07/10	04/07/10	03/30/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed [a]		RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria[b]					
Inorganic Chemicals						
Aluminum	17700	8800	17000	14600	10600	**28500 ***
Antimony	0.96	<0.63 UJ	0.25 J	0.091 J	0.087 J	0.27 J
Arsenic	15.4	10.1	4.9 J	8 J	6.8 J	4.4
Barium	88.4	40.2	**161 ***	**110 ***	53	**459 ***
Beryllium	0.88	0.3	**1.7 ***	**1.3 ***	0.47	**5.1 ***
Cadmium	0	**0.12 J***	**0.49 J***	**0.35 ***	**0.14 J***	**0.57 ***
Calcium	15800	2960 J	**49000 ***	**25200 ***	6090	**159000 ***
Chromium	17.4	11.4 J	16.2	11	10.7	11.4
Cobalt	10.4	3.7	4.3 J	**12.9 J***	3.7 J	2.1
Copper	17.7	7.7 J	12.7	6.2	6.6	14.3 J
Iron	23100	**28000 ***	14000	20700	16700	7980
Lead	26.1	13.1 J	**59.3 J***	21.4 J	13 J	**60.1 J***
Magnesium	3030	1360	**8670 ***	**5000 ***	2290	**16800 J***
Manganese	1450	201	1040	**1460 ***	110	**5480 ***
Mercury	0.036	<0.13 U	**4.5 ***	0.036 J	0.023 J	<0.12 U
Nickel	21.1	7.9	8.3 J	8.1 J	9.1 J	4.6 J
Potassium	927	542	**1250 J***	637 J	593 J	**2200 ***
Selenium	1.4	0.54 J	**2 ***	**1.6 ***	0.97	**3.3 ***
Silver	**0**	**0.036 J***	**0.93 J***	<0.048 UJ	**0.054 J***	**0.043 J***
Sodium	123	44.1 J	**280 ***	**167 ***	<79.2 UJ	**820 ***
Thallium	0	**0.14 J***	**0.14 J***	**0.16 J***	**0.15 J***	**0.12 J***
Vanadium	31.1	18.6 J	13.9 J	19.7 J	20.3 J	7.7
Zinc	61.8	**73.9 J***	**250 ***	46.5	37.5	53
Explosives/Propellants						
1,3,5-Trinitrobenzene	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U
2,4-Dinitrotoluene	None	<0.23 U	**0.022 J***	<0.25 U	<0.26 U	<0.25 U
2,6-Dinitrotoluene	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U
3-Nitrotoluene	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U
4-Amino-2,6-Dinitrotoluene	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U
HMX	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U
Nitrocellulose	None	<6.3 U	NR	NR	NR	NR
Nitroglycerin	None	<0.46 U	<0.48 U	<0.5 U	<0.52 U	<0.5 U
PETN	None	<0.46 U	<0.48 U	<0.5 U	<0.52 U	**0.065 J***
Tetryl	None	<0.23 U	<0.24 U	<0.25 U	<0.26 U	<0.25 U

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		**ASYsb-054**	**ASYsb-056**	**ASYsb-057**	**ASYsb-058**	**ASYsb-059**
Sample ID		**ASYsb-054-5696-SO**	**ASYsb-056-5702-SO**	**ASYsb-057-5706-SO**	**ASYsb-058-5710-SO**	**ASYsb-059-5714-SO**
Date		**04/06/10**	**04/07/10**	**04/07/10**	**04/07/10**	**03/30/10**
Depth (ft)		**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds						
2-Methylnaphthalene	None	<0.41 U	NR	NR	NR	NR
Acenaphthene	None	<0.063 U	<0.017 U	<0.0087 UJ	<0.0087 U	**0.034 ***
Acenaphthylene	None	<0.063 U	<0.017 U	<0.0087 UJ	<0.0087 U	**0.088 ***
Anthracene	None	<0.063 U	**0.019 ***	<0.0087 UJ	<0.0087 U	**0.22 ***
Benz(a)anthracene	None	**0.033 J***	**0.084 ***	**0.034 J***	**0.011 ***	**0.95 ***
Benzo(a)pyrene	None	**0.038 J***	**0.11 ***	**0.036 J***	<0.0087 U	**0.87 ***
Benzo(b)fluoranthene	None	**0.053 J***	**0.14 ***	**0.055 J***	**0.016 ***	**1.3 ***
Benzo(ghi)perylene	None	**0.019 J***	**0.083 ***	**0.028 J***	<0.0087 U	**0.54 ***
Benzo(k)fluoranthene	None	**0.025 J***	**0.04 ***	**0.02 J***	<0.0087 U	**0.69 ***
Bis(2-ethylhexyl)phthalate	None	**0.028 J***	NR	NR	NR	NR
Chrysene	None	**0.03 J***	**0.096 ***	**0.039 J***	<0.0087 U	**0.99 ***
Di-n-butyl phthalate	None	**0.026 J***	NR	NR	NR	NR
Dibenz(a,h)anthracene	None	<0.063 U	**0.021 ***	<0.0087 UJ	<0.0087 U	<0.016 U
Fluoranthene	None	**0.037 J***	**0.14 ***	**0.056 J***	**0.016 ***	**2.2 ***
Fluorene	None	<0.063 U	<0.017 U	<0.0087 UJ	<0.0087 U	**0.043 ***
Indeno(1,2,3-cd)pyrene	None	**0.018 J***	**0.078 ***	**0.022 J***	<0.0087 U	**0.48 ***
Naphthalene	None	<0.063 U	**0.02 ***	<0.0087 UJ	<0.0087 U	**0.34 ***
Phenanthrene	None	<0.063 U	**0.043 ***	**0.02 J***	<0.0087 U	**0.91 ***
Pyrene	None	**0.033 J***	**0.12 ***	**0.042 J***	**0.014 ***	**1.4 ***
Volatile Organic Compounds						
Carbon disulfide	None	<0.0063 U	NR	NR	NR	NR
Toluene	None	<0.0063 U	NR	NR	NR	NR

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		ASYsb-060	ASYsb-061	ASYsb-062	ASYsb-063	ASYsb-064
Sample ID		ASYsb-060-5718-SO	ASYsb-061-5722-SO	ASYsb-062-5726-SO	ASYsb-063-5730-SO	ASYsb-064-5734-SO
Date		03/30/10	03/30/10	03/30/10	04/07/10	03/30/10
Depth (ft)		0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0	0.0 - 1.0
Parameters Analyzed [a]		TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria[b]					
Inorganic Chemicals						
Aluminum	17700	12000	13900	9900	11600	**18100 ***
Antimony	0.96	<0.69 UJ	0.12 J	0.14 J	0.1 J	**6.1 J***
Arsenic	15.4	6.7	12.5	10.8	13.5 J	9.7
Barium	88.4	40.8	72.4	68.5	**105 ***	**1820 ***
Beryllium	0.88	0.3	0.6	0.51	**0.95 ***	**1.1 ***
Cadmium	0	**0.039 J***	**0.16 J***	**0.17 J***	**0.34 ***	**3.1 ***
Calcium	15800	1250	2140	3450	2390	**20300 ***
Chromium	17.4	13.6	17.4	10.6	16.4	**62 ***
Cobalt	10.4	3.2	9.6	3.5	**19.4 J***	6.9
Copper	17.7	5.1 J	16.7 J	6.4 J	**22.1 ***	**370 J***
Iron	23100	13500	**27100 ***	10100	**35900 ***	**25300 ***
Lead	26.1	10.2 J	20.5 J	12.9 J	16.9 J	**3570 J***
Magnesium	3030	1740 J	**3080 J***	1320 J	2970	**4350 J***
Manganese	1450	47.1	291	120	367	1180
Mercury	0.036	<0.14 U	0.03 J	0.034 J	<0.14 U	**0.12 J***
Nickel	21.1	10.1 J	20.6 J	8.6 J	**36.5 J***	**39.2 J***
Potassium	927	**1030 ***	**1110 ***	681	**1130 J***	**1680 ***
Selenium	1.4	0.84	1.2	0.99	**2 ***	**2.1 ***
Silver	0	**0.02 J***	**0.049 J***	**0.058 J***	<0.044 UJ	**7.1 ***
Sodium	123	47.4 J	39.5 J	72.4 J	<67.7 UJ	**1090 ***
Thallium	0	**0.15 J***	**0.2 J***	**0.16 J***	**0.16 J***	<3.4 U
Vanadium	31.1	18.4	25	13.7	19 J	17.6
Zinc	61.8	37.9	**64.5 ***	41.3	**121 ***	**1560 ***
Explosives/Propellants						
1,3,5-Trinitrobenzene	None	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.23 U
2,4-Dinitrotoluene	None	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.23 U
2,6-Dinitrotoluene	None	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.23 U
3-Nitrotoluene	None	**0.17 J***	<0.24 U	**0.017 J***	<0.24 U	<0.23 U
4-Amino-2,6-Dinitrotoluene	None	<0.25 U	<0.24 U	<0.24 U	<0.24 U	<0.23 U
HMX	None	<0.25 U	<0.24 U	<0.24 U	**0.016 J***	<0.23 U
Nitrocellulose	None	NR	NR	**1.6 J***	NR	NR
Nitroglycerin	None	<0.5 U	<0.49 U	<0.48 U	<0.48 U	<0.46 U
PETN	None	<0.5 U	<0.49 U	<0.48 U	<0.48 U	<0.46 U
Tetryl	None	<0.25 U	<0.24 U	<0.24 U	**0.013 J***	<0.23 U

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		**ASYsb-060**	**ASYsb-061**	**ASYsb-062**	**ASYsb-063**	**ASYsb-064**
Sample ID		**ASYsb-060-5718-SO**	**ASYsb-061-5722-SO**	**ASYsb-062-5726-SO**	**ASYsb-063-5730-SO**	**ASYsb-064-5734-SO**
Date		**03/30/10**	**03/30/10**	**03/30/10**	**04/07/10**	**03/30/10**
Depth (ft)		**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**	**0.0 - 1.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds						
2-Methylnaphthalene	None	NR	NR	**0.05 J***	NR	NR
Acenaphthene	None	<0.0092 U	<0.0094 U	<0.061 U	**0.0096 ***	<0.011 U
Acenaphthylene	None	<0.0092 U	<0.0094 U	**0.039 J***	**0.023 ***	<0.011 U
Anthracene	None	<0.0092 U	<0.0094 U	**0.032 J***	**0.046 ***	<0.011 U
Benz(a)anthracene	None	<0.0092 U	<0.0094 U	**0.11 ***	**0.24 ***	<0.011 U
Benzo(a)pyrene	None	<0.0092 U	<0.0094 U	**0.11 ***	**0.27 ***	**0.019 ***
Benzo(b)fluoranthene	None	**0.026 ***	<0.0094 U	**0.2 ***	**0.44 ***	**0.052 ***
Benzo(ghi)perylene	None	<0.0092 U	<0.0094 U	**0.075 ***	**0.2 ***	<0.011 U
Benzo(k)fluoranthene	None	<0.0092 U	<0.0094 U	**0.082 ***	**0.14 ***	<0.011 U
Bis(2-ethylhexyl)phthalate	None	NR	NR	<0.41 U	NR	NR
Chrysene	None	<0.0092 U	<0.0094 U	**0.12 ***	**0.28 ***	**0.037 ***
Di-n-butyl phthalate	None	NR	NR	<0.41 U	NR	NR
Dibenz(a,h)anthracene	None	<0.0092 U	<0.0094 U	<0.061 U	**0.046 ***	<0.011 U
Fluoranthene	None	**0.01 ***	**0.014 ***	**0.24 ***	**0.51 ***	**0.037 ***
Fluorene	None	<0.0092 U	<0.0094 U	**0.012 J***	**0.012 ***	<0.011 U
Indeno(1,2,3-cd)pyrene	None	<0.0092 U	<0.0094 U	**0.067 ***	**0.18 ***	<0.011 U
Naphthalene	None	<0.0092 U	<0.0094 U	**0.039 J***	**0.011 ***	**0.018 ***
Phenanthrene	None	<0.0092 U	<0.0094 U	**0.14 ***	**0.14 ***	**0.032 ***
Pyrene	None	<0.0092 U	**0.011 ***	**0.18 ***	**0.42 ***	**0.023 ***
Volatile Organic Compounds						
Carbon disulfide	None	NR	NR	**0.00087 J***	NR	NR
Toluene	None	NR	NR	**0.00065 J***	NR	NR

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		**ASYsb-065**
Sample ID		**ASYsb-065-5738-SO**
Date		**04/07/10**
Depth (ft)		**0.0 - 1.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria**[b]	
Inorganic Chemicals		
Aluminum	17700	**17800 ***
Antimony	0.96	<0.87 UJ
Arsenic	15.4	5.9 J
Barium	88.4	**148 ***
Beryllium	0.88	**1.2 ***
Cadmium	0	**0.69 ***
Calcium	15800	3400
Chromium	17.4	**17.7 ***
Cobalt	10.4	5.3 J
Copper	17.7	15.5
Iron	23100	12200
Lead	26.1	**37.4 J***
Magnesium	3030	1410
Manganese	1450	297
Mercury	0.036	**0.14 J***
Nickel	21.1	15.1 J
Potassium	927	**1260 J***
Selenium	1.4	**2.2 ***
Silver	0	**0.14 J***
Sodium	123	<54.8 UJ
Thallium	0	**0.3 J***
Vanadium	31.1	14.6 J
Zinc	61.8	**108 ***
Explosives/Propellants		
1,3,5-Trinitrobenzene	None	<0.26 U
2,4-Dinitrotoluene	None	<0.26 U
2,6-Dinitrotoluene	None	<0.26 U
3-Nitrotoluene	None	<0.26 U
4-Amino-2,6-Dinitrotoluene	None	<0.26 U
HMX	None	<0.26 U
Nitrocellulose	None	NR
Nitroglycerin	None	<0.52 U
PETN	None	<0.52 U
Tetryl	None	<0.26 U

Table 4–13. Analytes Detected in PBA08 RI Discrete Surface Soil Samples (continued)

Location		**ASYsb-065**
Sample ID		**ASYsb-065-5738-SO**
Date		**04/07/10**
Depth (ft)		**0.0 - 1.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)		
Semi-volatile Organic Compounds		
2-Methylnaphthalene	None	NR
Acenaphthene	None	<0.012 U
Acenaphthylene	None	<0.012 U
Anthracene	None	**0.013 ***
Benz(a)anthracene	None	**0.065 ***
Benzo(a)pyrene	None	**0.073 ***
Benzo(b)fluoranthene	None	**0.12 ***
Benzo(ghi)perylene	None	**0.046 ***
Benzo(k)fluoranthene	None	**0.043 ***
Bis(2-ethylhexyl)phthalate	None	NR
Chrysene	None	**0.081 ***
Di-n-butyl phthalate	None	NR
Dibenz(a,h)anthracene	None	<0.012 U
Fluoranthene	None	**0.15 ***
Fluorene	None	<0.012 U
Indeno(1,2,3-cd)pyrene	None	**0.045 ***
Naphthalene	None	<0.012 U
Phenanthrene	None	**0.054 ***
Pyrene	None	**0.12 ***
Volatile Organic Compounds		
Carbon disulfide	None	NR
Toluene	None	NR

[a] Only detected analytes are presented in the table.
[b] Background concentrations are published in the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b).
ft = Feet.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
ID = Identification.
J = Estimated value less than reporting limits.
mg/kg = Milligrams per kilogram.
NR = Not reported/not analyzed.
PAH = Polycyclic Aromatic Hydrocarbon.
PCB = Polychlorinated Biphenyl.
PETN = Pentaerythritol Tetranitrate.
TAL = Target Analyte List.
R = Rejected.
RVAAP = Ravenna Army Ammunition Plant.
U= Non-detectable concentration.
UJ = Non-detectable concentration, reporting limit estimated.
*** = Result exceeds background concentration.**
< = Less than.

Table 4-14. Analytes Detected in PBA08 RI Subsurface Soil Samples

Location		**ASYsb-045**	**ASYsb-045**	**ASYsb-045**	**ASYsb-046**	**ASYsb-046**
Sample ID		**ASYsb-045-5661-SO**	**ASYsb-045-5662-SO**	**ASYsb-045-5663-SO**	**ASYsb-046-5665-SO**	**ASYsb-046-5666-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**7.0 - 13.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**RVAAP Full Suite**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	18600	11600	6570	13100	9960
Antimony	0.96	0.16 J	0.084 J	<0.59 R	0.14 J	0.1 J
Arsenic	19.8	15.9 J	14.3 J	11.4 J	**20.2 J***	15.3 J
Barium	124	60.8	79.8	31.4	105	76.7
Beryllium	0.88	0.65	0.6	0.31	0.76	0.5
Cadmium	0	**0.037 J***	**0.059 J***	**0.04 J***	**0.028 J***	**0.058 J***
Calcium	35500	3010 J	2010 J	13800 J	2010 J	2050 J
Chromium	27.2	21.2	18.2	10.9	19.7	15.7
Cobalt	23.2	8.3	14.9	8	11	19.5
Copper	32.3	22.7 J	21.7 J	15.7 J	16.3 J	24.3 J
Iron	35200	34900	27900	18800	**37800 ***	29700
Lead	19.1	13.6 J	12 J	8.4 J	16.1 J	13.7 J
Magnesium	8790	3380 J	3860 J	3830 J	1670 J	3520 J
Manganese	3030	170	384	272	463	906
Mercury	0.044	<0.13 U	<0.12 U	<0.12 U	0.02 J	<0.12 U
Nickel	60.7	18.9 J	30.4 J	18.7 J	13 J	29.4 J
Potassium	3350	1150 J	1340 J	1110 J	988 J	1140 J
Selenium	1.5	1.1 J	1.2 J	0.67 J	1.1 J	0.97 J
Silver	0	<0.023 UJ	**0.0089 J***	<0.02 UJ	**0.028 J***	**0.017 J***
Sodium	145	<631 U	49.4 J	59.8 J	**198 ***	**167 ***
Thallium	0.91	0.23 J	0.18 J	0.11 J	0.15 J	0.17 J
Vanadium	37.6	33.6 J	18.9 J	11.5 J	28.8 J	17.1 J
Zinc	93.3	59.8	60.5	45.4	48.6	71.4
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 UJ	<0.24 U	<0.25 UJ	<0.24 UJ	<0.24 U
HMX	None	<0.24 U	<0.24 U	<0.25 U	<0.24 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	**2 J***	<5.9 UJ
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Acenaphthylene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Anthracene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Benz(a)anthracene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Benzo(a)pyrene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Benzo(b)fluoranthene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Benzo(ghi)perylene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Benzo(k)fluoranthene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-045**	**ASYsb-045**	**ASYsb-045**	**ASYsb-046**	**ASYsb-046**
Sample ID		**ASYsb-045-5661-SO**	**ASYsb-045-5662-SO**	**ASYsb-045-5663-SO**	**ASYsb-046-5665-SO**	**ASYsb-046-5666-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**7.0 - 13.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**RVAAP Full Suite**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	**0.036 J***	<0.39 U
Chrysene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Dibenz(a,h)anthracene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Fluoranthene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Fluorene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Indeno(1,2,3-cd)pyrene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Naphthalene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.052 UJ
Phenanthrene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Pyrene	None	<0.0084 U	<0.0079 U	<0.0078 U	<0.065 U	<0.059 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	**0.0098 J***	<0.024 U
Carbon disulfide	None	NR	NR	NR	<0.0065 U	<0.0059 U
Toluene	None	NR	NR	NR	<0.0065 U	<0.0059 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-047**	**ASYsb-047**	**ASYsb-047**	**ASYsb-048**	**ASYsb-048**
Sample ID		**ASYsb-047-5669-SO**	**ASYsb-047-6223-FD**	**ASYsb-047-5670-SO**	**ASYsb-048-5673-SO**	**ASYsb-048-5674-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	14400	12100	9050	14400	10200
Antimony	0.96	0.092 J	0.083 J	<0.58 UJ	<0.62 R	0.081 J
Arsenic	19.8	13.9 J	14.3 J	9.3 J	9.8 J	14.9 J
Barium	124	62.3	88.5	57	117	71.1
Beryllium	0.88	0.58 J	0.75	0.46	**1.1 ***	0.51
Cadmium	0	**0.027 J***	**0.056 J***	**0.046 J***	**0.043 J***	**0.057 J***
Calcium	35500	2080 J	12600 J	5750 J	34400 J	4890 J
Chromium	27.2	17.8	20.2	14	16.1	17
Cobalt	23.2	9.5	10.9	8.6	4.8	12.7
Copper	32.3	15.3 J	22.2 J	14.9 J	8.2	20.7 J
Iron	35200	24800	28600	19600	19000	27400
Lead	19.1	12.6 J	11.2 J	8.7 J	11.7 J	11.6 J
Magnesium	8790	2930 J	4920 J	3790 J	6320 J	4380 J
Manganese	3030	171	350	280	1010	469
Mercury	0.044	<0.12 U	<0.12 U	<0.12 U	<0.12 U	<0.12 U
Nickel	60.7	18.9 J	32.8 J	24.6 J	10.7 J	31.6 J
Potassium	3350	1220 J	1860 J	1250 J	987 J	1230 J
Selenium	1.5	0.96 J	1.2 J	0.86 J	**1.6 J***	0.98 J
Silver	0	**0.024 J***	**0.031 J***	**0.023 J***	**0.032 J***	**0.019 J***
Sodium	145	49.9 J	61.7 J	91.7 J	**191 ***	51 J
Thallium	0.91	0.17 J	0.17 J	0.14 J	0.14 J	0.16 J
Vanadium	37.6	24.1 J	20.9 J	15.1 J	18.9 J	17.9 J
Zinc	93.3	54.7	59.4	44.3	33.2	54.7
Explosives/Propellants						
3-Nitrotoluene	None	<0.25 UJ	<0.24 U	<0.25 U	<0.24 U	<0.25 U
HMX	None	<0.25 U	<0.24 U	<0.25 U	<0.24 U	<0.25 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.008 UJ	<0.0077 U	<0.0078 U	<0.0082 U	<0.0079 U
Acenaphthylene	None	<0.008 UJ	<0.0077 U	<0.0078 U	<0.0082 U	<0.0079 U
Anthracene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.013 ***	<0.0079 U
Benz(a)anthracene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.043 ***	<0.0079 U
Benzo(a)pyrene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.04 ***	<0.0079 U
Benzo(b)fluoranthene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.076 ***	<0.0079 U
Benzo(ghi)perylene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.037 ***	<0.0079 U
Benzo(k)fluoranthene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.024 ***	<0.0079 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-047**	**ASYsb-047**	**ASYsb-047**	**ASYsb-048**	**ASYsb-048**
Sample ID		**ASYsb-047-5669-SO**	**ASYsb-047-6223-FD**	**ASYsb-047-5670-SO**	**ASYsb-048-5673-SO**	**ASYsb-048-5674-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**	**04/05/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.054 ***	<0.0079 U
Dibenz(a,h)anthracene	None	<0.008 UJ	<0.0077 U	<0.0078 U	<0.0082 U	<0.0079 U
Fluoranthene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.043 ***	<0.0079 U
Fluorene	None	<0.008 UJ	<0.0077 U	<0.0078 U	<0.0082 U	<0.0079 U
Indeno(1,2,3-cd)pyrene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.027 ***	<0.0079 U
Naphthalene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.11 ***	<0.0079 U
Phenanthrene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.076 ***	<0.0079 U
Pyrene	None	<0.008 UJ	<0.0077 U	<0.0078 U	**0.045 ***	<0.0079 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	NR	NR
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-049**	**ASYsb-049**	**ASYsb-049**	**ASYsb-049**	**ASYsb-050**
Sample ID		**ASYsb-049-5677-SO**	**ASYsb-049-5678-SO**	**ASYsb-049-5679-SO**	**ASYsb-049-5686-SO**	**ASYsb-050-5681-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/06/10**	**04/07/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**7.0 - 13.0**	**8.0 - 9.5**	**1.0 - 4.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	17200	11700	7860	NR	12300
Antimony	0.96	0.078 J	0.075 J	<0.59 R	NR	<0.62 UJ
Arsenic	19.8	9.8 J	13 J	13.7 J	NR	10.6 J
Barium	124	85.2	69.2	30.7	NR	73.3
Beryllium	0.88	0.71	0.59	0.37	NR	0.56
Cadmium	0	**0.07 J***	**0.059 J***	**0.038 J***	NR	**0.044 J***
Calcium	35500	4640 J	12300 J	6920 J	NR	1500
Chromium	27.2	21.2	18.8	13.1	NR	16.9
Cobalt	23.2	8.9	11.8	9.9	NR	15.3 J
Copper	32.3	18.8 J	19.6 J	18.3 J	NR	14
Iron	35200	27900	28100	23300	NR	27700
Lead	19.1	11.4 J	10.9 J	10.6 J	NR	13 J
Magnesium	8790	3660 J	5160 J	4630 J	NR	2600
Manganese	3030	201	320	271	NR	421
Mercury	0.044	0.021 J	<0.12 U	<0.12 U	NR	<0.12 U
Nickel	60.7	26.4 J	29.9 J	23.9 J	NR	20.3 J
Potassium	3350	1430 J	1740 J	1390 J	NR	1080 J
Selenium	1.5	1.3 J	1 J	0.75 J	NR	1.1
Silver	0	**0.04 J***	**0.024 J***	<0.021 UJ	NR	<0.026 UJ
Sodium	145	<620 U	72.3 J	69 J	NR	<51.4 UJ
Thallium	0.91	0.17 J	0.16 J	0.12 J	NR	0.19 J
Vanadium	37.6	25.6 J	20 J	13.9 J	NR	19.8 J
Zinc	93.3	67.6	58.1	50.5	NR	48.3
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 U	<0.24 U	<0.24 U	NR	<0.25 U
HMX	None	<0.24 U	<0.24 U	<0.24 U	NR	<0.25 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Acenaphthylene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Anthracene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Benz(a)anthracene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Benzo(a)pyrene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Benzo(b)fluoranthene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Benzo(ghi)perylene	None	<0.0083 U	<0.0078 U	**0.0097 ***	<0.059 U	<0.0083 U
Benzo(k)fluoranthene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-049**	**ASYsb-049**	**ASYsb-049**	**ASYsb-049**	**ASYsb-050**
Sample ID		**ASYsb-049-5677-SO**	**ASYsb-049-5678-SO**	**ASYsb-049-5679-SO**	**ASYsb-049-5686-SO**	**ASYsb-050-5681-SO**
Date		**04/05/10**	**04/05/10**	**04/05/10**	**04/06/10**	**04/07/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**7.0 - 13.0**	**8.0 - 9.5**	**1.0 - 4.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	<0.39 U	NR
Chrysene	None	<0.0083 U	<0.0078 U	**0.012 ***	<0.059 U	<0.0083 U
Dibenz(a,h)anthracene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Fluoranthene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Fluorene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Indeno(1,2,3-cd)pyrene	None	<0.0083 U	<0.0078 U	<0.0079 U	<0.059 U	<0.0083 U
Naphthalene	None	<0.0083 U	<0.0078 U	**0.039 ***	<0.059 U	<0.0083 U
Phenanthrene	None	<0.0083 U	<0.0078 U	**0.014 ***	<0.059 U	<0.0083 U
Pyrene	None	<0.0083 U	<0.0078 U	**0.0082 ***	<0.059 U	<0.0083 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	<0.024 U	NR
Carbon disulfide	None	NR	NR	NR	**0.00062 J***	NR
Toluene	None	NR	NR	NR	<0.0059 U	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-050**	**ASYsb-052**	**ASYsb-052**	**ASYsb-053**	**ASYsb-053**
Sample ID		**ASYsb-050-5682-SO**	**ASYsb-052-5689-SO**	**ASYsb-052-5690-SO**	**ASYsb-053-5693-SO**	**ASYsb-053-5694-SO**
Date		**04/07/10**	**04/06/10**	**04/06/10**	**04/07/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	13400 J	14600	10300 J	11500	11900 J
Antimony	0.96	0.093 J	0.12 J	0.091 J	<0.63 UJ	<0.61 UJ
Arsenic	19.8	16.7 J	16.4	14 J	13.8 J	16.6 J
Barium	124	97.2	70.4	80.5	54.5	59.5
Beryllium	0.88	0.77	0.85	0.55 J	0.63	0.61
Cadmium	0	**0.11 J***	**0.057 J***	**0.076 J***	**0.066 J***	**0.058 J***
Calcium	35500	25900	1290 J	7590	720	2710
Chromium	27.2	20.1	19.1 J	17	15.7	18.5
Cobalt	23.2	21 J	**31.5 ***	11.6	15.9 J	12.9 J
Copper	32.3	19.9	20.3 J	20.2 J	18.3	21.2
Iron	35200	33200	33600	29300	28300	33200
Lead	19.1	13.6 J	14.7 J	11.7	11.2 J	12.8 J
Magnesium	8790	6310	2920	4730	3120	4640
Manganese	3030	698	330	411	347	369
Mercury	0.044	<0.12 U	0.022 J	<0.12 U	<0.13 U	<0.12 U
Nickel	60.7	37.4	23.7	30.4 J	22.3 J	31.5
Potassium	3350	2270 J	1340	1540	716 J	1190 J
Selenium	1.5	1.1	0.79 J	1.2 J	1.4	1.3
Silver	0	**0.03 J***	**0.027 J***	**0.021 J***	<0.015 UJ	<0.02 UJ
Sodium	145	92.1 J	57.2 J	73 J	<37.3 UJ	<59.3 UJ
Thallium	0.91	0.25	0.2 J	0.18 J	0.17 J	0.19 J
Vanadium	37.6	22.5 J	24.9 J	18.4	17.9 J	18.3 J
Zinc	93.3	64.1	57.7 J	60.8	50.1	60.9
Explosives/Propellants						
3-Nitrotoluene	None	<0.26 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U
HMX	None	<0.26 U	<0.25 U	<0.25 U	<0.25 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Acenaphthylene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Anthracene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Benz(a)anthracene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Benzo(a)pyrene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Benzo(b)fluoranthene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Benzo(ghi)perylene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Benzo(k)fluoranthene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-050**	**ASYsb-052**	**ASYsb-052**	**ASYsb-053**	**ASYsb-053**
Sample ID		**ASYsb-050-5682-SO**	**ASYsb-052-5689-SO**	**ASYsb-052-5690-SO**	**ASYsb-053-5693-SO**	**ASYsb-053-5694-SO**
Date		**04/07/10**	**04/06/10**	**04/06/10**	**04/07/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Dibenz(a,h)anthracene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Fluoranthene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Fluorene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Indeno(1,2,3-cd)pyrene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Naphthalene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Phenanthrene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Pyrene	None	<0.008 U	<0.0085 U	<0.0079 U	<0.0084 U	<0.0081 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	NR	NR
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		ASYsb-054	ASYsb-054	ASYsb-056	ASYsb-056	ASYsb-057
Sample ID		ASYsb-054-5697-SO	ASYsb-054-5698-SO	ASYsb-056-5703-SO	ASYsb-056-5704-SO	ASYsb-057-5707-SO
Date		04/06/10	04/06/10	04/07/10	04/07/10	04/07/10
Depth (ft)		1.0 - 4.0	4.0 - 7.0	1.0 - 4.0	4.0 - 7.0	1.0 - 4.0
Parameters Analyzed [a]		RVAAP Full Suite	RVAAP Full Suite	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs	TAL Metals Explosives PAHs
Analyte (mg/kg)	Background Criteria[b]					
Inorganic Chemicals						
Aluminum	19500	13100	10300 J	12300	12200 J	14000
Antimony	0.96	0.098 J	0.077 J	<0.61 UJ	0.077 J	0.1 J
Arsenic	19.8	16.3	13.4 J	7.1 J	13.5 J	**20.8 J***
Barium	124	68.4	52.6	86.6	59.9	100
Beryllium	0.88	0.72	0.51 J	0.64	0.63	**0.96 ***
Cadmium	0	**0.048 J***	**0.05 J***	**0.1 J***	**0.051 J***	**0.083 J***
Calcium	35500	1350 J	12900	3010	10400	1540
Chromium	27.2	17.6 J	16.6	17.5	17.5	18.6
Cobalt	23.2	12.1	11.3	12.9 J	12 J	22.6 J
Copper	32.3	18.3 J	18.9 J	15.6	19.2	22.3
Iron	35200	32400	28800	26800	29600	**40000 ***
Lead	19.1	14.7 J	11	12.6 J	11.8 J	14.8 J
Magnesium	8790	3050	5550	3560	6220	3650
Manganese	3030	302	376	456	337	401
Mercury	0.044	<0.12 U	<0.12 U	0.023 J	<0.12 U	<0.12 U
Nickel	60.7	23.4	27.3 J	26 J	28.2	31.9 J
Potassium	3350	1100	1810	1140 J	1820 J	1080 J
Selenium	1.5	0.79 J	1.2 J	1.3	1.2	**1.7 ***
Silver	0	**0.02 J***	**0.023 J***	<0.033 UJ	<0.026 UJ	<0.019 UJ
Sodium	145	53.5 J	74.4 J	<70.5 UJ	87.1 J	<47.3 UJ
Thallium	0.91	0.18 J	0.2 J	0.16 J	0.18 J	0.19 J
Vanadium	37.6	23.4 J	17.3	18.7 J	18.7 J	21 J
Zinc	93.3	51.7 J	56.1	63.3	62	63.2
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 U	<0.24 U	<0.25 U	<0.24 U	<0.25 U
HMX	None	<0.24 U	<0.24 U	<0.25 U	<0.24 U	<0.25 U
Nitrocellulose	None	<6.1 U	<5.8 U	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Acenaphthylene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Anthracene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Benz(a)anthracene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Benzo(a)pyrene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Benzo(b)fluoranthene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Benzo(ghi)perylene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Benzo(k)fluoranthene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-054**	**ASYsb-054**	**ASYsb-056**	**ASYsb-056**	**ASYsb-057**
Sample ID		**ASYsb-054-5697-SO**	**ASYsb-054-5698-SO**	**ASYsb-056-5703-SO**	**ASYsb-056-5704-SO**	**ASYsb-057-5707-SO**
Date		**04/06/10**	**04/06/10**	**04/07/10**	**04/07/10**	**04/07/10**
Depth (ft)		**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**RVAAP Full Suite**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	<0.4 U	<0.38 U	NR	NR	NR
Chrysene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Dibenz(a,h)anthracene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Fluoranthene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Fluorene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Indeno(1,2,3-cd)pyrene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Naphthalene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Phenanthrene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Pyrene	None	<0.061 U	<0.058 U	<0.0082 U	<0.0078 U	<0.008 U
Volatile Organic Compounds						
2-Butanone	None	<0.024 U	<0.023 U	NR	NR	NR
Carbon disulfide	None	<0.0061 U	<0.0058 U	NR	NR	NR
Toluene	None	<0.0061 U	<0.0058 U	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-057**	**ASYsb-058**	**ASYsb-058**	**ASYsb-059**	**ASYsb-059**
Sample ID		**ASYsb-057-5708-SO**	**ASYsb-058-5711-SO**	**ASYsb-058-5712-SO**	**ASYsb-059-5715-SO**	**ASYsb-059-6220-FD**
Date		**04/07/10**	**04/07/10**	**04/07/10**	**03/30/10**	**03/30/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	13000 J	12200	11100 J	12500	14300
Antimony	0.96	0.079 J	0.094 J	0.081 J	<0.62 UJ	0.1 J
Arsenic	19.8	15.8 J	18 J	19.7 J	**25.2 ***	**23.1 ***
Barium	124	71.1	113	74.6	84.1	77.2
Beryllium	0.88	0.75	0.84	0.59	**1.2 ***	0.79
Cadmium	0	**0.058 J***	**0.32 ***	**0.063 J***	**0.086 J***	**0.077 J***
Calcium	35500	11100	2990	14300	1460	2900
Chromium	27.2	19	17.2	16.7	20.4	19.8
Cobalt	23.2	12 J	16.1 J	14 J	**33.7 ***	10.7
Copper	32.3	20.2	22.2	19.8	9.9 J	21.2 J
Iron	35200	32200	35000	30900	**45400 ***	**36800 ***
Lead	19.1	12.6 J	13.8 J	13.6 J	16.2 J	16.3 J
Magnesium	8790	5580	4340	6170	2450 J	3610 J
Manganese	3030	437	740	383	2010	662
Mercury	0.044	<0.12 U	<0.12 U	<0.12 U	<0.12 U	<0.13 U
Nickel	60.7	32.3	47.4 J	29.4	19.4 J	24.9 J
Potassium	3350	1680 J	1200 J	1580 J	1080	1350
Selenium	1.5	1.3	**1.8 ***	1	1.2	1.5
Silver	0	<0.022 UJ	<0.035 UJ	<0.026 UJ	**0.011 J***	**0.031 J***
Sodium	145	<75.8 UJ	<59.6 UJ	<77.9 UJ	51.5 J	86.2 J
Thallium	0.91	0.2 J	0.18 J	0.18 J	0.17 J	0.19 J
Vanadium	37.6	20.6 J	19.3 J	17.9 J	33.3	24.8
Zinc	93.3	66.9	63.2	59.3	89.4	78.1
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U
HMX	None	<0.24 U	<0.24 U	<0.25 U	<0.25 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Acenaphthylene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Anthracene	None	<0.0079 U	<0.0078 U	**0.011 ***	<0.0083 U	<0.0083 U
Benz(a)anthracene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Benzo(a)pyrene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Benzo(b)fluoranthene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Benzo(ghi)perylene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Benzo(k)fluoranthene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-057**	**ASYsb-058**	**ASYsb-058**	**ASYsb-059**	**ASYsb-059**
Sample ID		**ASYsb-057-5708-SO**	**ASYsb-058-5711-SO**	**ASYsb-058-5712-SO**	**ASYsb-059-5715-SO**	**ASYsb-059-6220-FD**
Date		**04/07/10**	**04/07/10**	**04/07/10**	**03/30/10**	**03/30/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**	**4.0 - 7.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Dibenz(a,h)anthracene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Fluoranthene	None	<0.0079 U	<0.0078 U	**0.019 ***	<0.0083 U	<0.0083 U
Fluorene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Indeno(1,2,3-cd)pyrene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Naphthalene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Phenanthrene	None	<0.0079 U	<0.0078 U	<0.0079 U	<0.0083 U	<0.0083 U
Pyrene	None	<0.0079 U	<0.0078 U	**0.014 ***	<0.0083 U	<0.0083 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	NR	NR
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-059**	**ASYsb-059**	**ASYsb-060**	**ASYsb-060**	**ASYsb-061**
Sample ID		**ASYsb-059-5716-SO**	**ASYsb-059-5717-SO**	**ASYsb-060-5719-SO**	**ASYsb-060-5720-SO**	**ASYsb-061-5723-SO**
Date		**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**
Depth (ft)		**4.0 - 7.0**	**7.0 - 13.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	12900 J	8130	12200	11100 J	17000
Antimony	0.96	0.088 J	0.081 J	0.088 J	<0.6 UJ	0.12 J
Arsenic	19.8	14.6	14	11.6	14.3	14.9
Barium	124	75.3	38.6	111	61.2	72.3
Beryllium	0.88	0.67	0.48	0.82	0.64	0.85
Cadmium	0	**0.084 J***	**0.078 J***	**0.042 J***	**0.079 J***	**0.088 J***
Calcium	35500	1580 J	16700	1390	8750 J	769
Chromium	27.2	18.9 J	12.9	18.3	17.6 J	22.1
Cobalt	23.2	11 J	8.9	8.6	12.3 J	12.4
Copper	32.3	18.8	19.3 J	20.2 J	17.9	19.1 J
Iron	35200	29600	23600	28300	28900	30600
Lead	19.1	9.5	11.6 J	12 J	11.2	13.5 J
Magnesium	8790	3670 J	6320 J	4010 J	5370 J	3860 J
Manganese	3030	354	355	203	566	304
Mercury	0.044	<0.12 U	<0.12 U	<0.12 U	<0.12 U	<0.13 U
Nickel	60.7	28.6 J	21.1 J	30.3 J	29.5 J	25.7 J
Potassium	3350	1910 J	1470	1420	1940 J	1790
Selenium	1.5	1.3 J	1	1.5	1.1 J	1.4
Silver	0	<0.023 UJ	**0.025 J***	**0.02 J***	<0.021 UJ	**0.031 J***
Sodium	145	93.8 J	130	84.8 J	81.3 J	55.2 J
Thallium	0.91	0.19 J	0.15 J	0.18 J	0.18 J	0.25 J
Vanadium	37.6	21.2	14.6	22.5	18.5	29.5
Zinc	93.3	71.3	62.6	62.3	57.9	65
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 U	<0.23 U	<0.24 U	<0.24 U	**0.021 J***
HMX	None	<0.24 U	<0.23 U	<0.24 U	<0.24 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Acenaphthylene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Anthracene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Benz(a)anthracene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Benzo(a)pyrene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Benzo(b)fluoranthene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Benzo(ghi)perylene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Benzo(k)fluoranthene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-059**	**ASYsb-059**	**ASYsb-060**	**ASYsb-060**	**ASYsb-061**
Sample ID		**ASYsb-059-5716-SO**	**ASYsb-059-5717-SO**	**ASYsb-060-5719-SO**	**ASYsb-060-5720-SO**	**ASYsb-061-5723-SO**
Date		**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**
Depth (ft)		**4.0 - 7.0**	**7.0 - 13.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Dibenz(a,h)anthracene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Fluoranthene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Fluorene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Indeno(1,2,3-cd)pyrene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Naphthalene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Phenanthrene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Pyrene	None	<0.0083 U	<0.008 U	<0.0081 U	<0.008 U	<0.0086 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	NR	NR
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-061**	**ASYsb-062**	**ASYsb-062**	**ASYsb-062**	**ASYsb-063**
Sample ID		**ASYsb-061-5724-SO**	**ASYsb-062-6218-FD**	**ASYsb-062-5727-SO**	**ASYsb-062-5728-SO**	**ASYsb-063-5731-SO**
Date		**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**RVAAP Full Suite**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	10600 J	14200	10400	10300 J	12100
Antimony	0.96	0.081 J	0.12 J	<0.62 UJ	<0.59 UJ	0.099 J
Arsenic	19.8	14.4	**26.8 ***	19.1	16	14.5 J
Barium	124	68.2	72	55.9	67.7	105
Beryllium	0.88	0.59	0.8	0.46	0.58	0.8
Cadmium	0	**0.055 J***	<0.032 UJ	<0.026 UJ	**0.13 J***	**0.25 J***
Calcium	35500	2420 J	1620	1340	7350 J	2720
Chromium	27.2	16.3 J	18.5	14.3	16.3 J	17.4
Cobalt	23.2	10.8 J	8.9	11.1	13.4 J	15.9 J
Copper	32.3	19.2	15.3 J	11.7 J	18.7	21.4
Iron	35200	29600	**42000 ***	24600	30400	32700
Lead	19.1	10.7	16.3 J	10.8 J	12.1	13.9 J
Magnesium	8790	4160 J	2450 J	2080 J	4590 J	3650
Manganese	3030	287	270	213	590	484
Mercury	0.044	<0.12 U	<0.13 U	<0.12 U	<0.12 U	0.027 J
Nickel	60.7	28.8 J	17.9 J	17.9 J	29.8 J	39 J
Potassium	3350	1090 J	1370	1030	1600 J	1370 J
Selenium	1.5	1.4 J	1.2	1	1.1 J	**1.7 ***
Silver	0	<0.022 UJ	<0.027 UJ	<0.025 UJ	<0.03 UJ	<0.044 UJ
Sodium	145	47.9 J	44.2 J	33.8 J	66.2 J	<69.7 UJ
Thallium	0.91	0.16 J	0.18 J	0.15 J	0.17 J	0.16 J
Vanadium	37.6	17	24.9	16.5	16.7	20 J
Zinc	93.3	56.9	60.5	48.4	64	87.3
Explosives/Propellants						
3-Nitrotoluene	None	<0.26 U	<0.24 U	<0.24 U	<0.25 U	<0.24 U
HMX	None	<0.26 U	<0.24 U	<0.24 U	<0.25 U	**0.014 J***
Nitrocellulose	None	NR	<6.3 U	<6.2 U	<5.9 U	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.015 ***
Acenaphthylene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.03 ***
Anthracene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.075 ***
Benz(a)anthracene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.35 ***
Benzo(a)pyrene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.43 ***
Benzo(b)fluoranthene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.62 ***
Benzo(ghi)perylene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.29 ***
Benzo(k)fluoranthene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.28 ***

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-061**	**ASYsb-062**	**ASYsb-062**	**ASYsb-062**	**ASYsb-063**
Sample ID		**ASYsb-061-5724-SO**	**ASYsb-062-6218-FD**	**ASYsb-062-5727-SO**	**ASYsb-062-5728-SO**	**ASYsb-063-5731-SO**
Date		**03/30/10**	**03/30/10**	**03/30/10**	**03/30/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]	**Background Criteria[b]**	**TAL Metals Explosives PAHs**	**RVAAP Full Suite**	**RVAAP Full Suite**	**RVAAP Full Suite**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	<0.42 U	<0.41 U	<0.39 U	NR
Chrysene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.47 ***
Dibenz(a,h)anthracene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.074 ***
Fluoranthene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.82 ***
Fluorene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.021 ***
Indeno(1,2,3-cd)pyrene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.27 ***
Naphthalene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.018 ***
Phenanthrene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.23 ***
Pyrene	None	<0.008 U	<0.063 U	<0.062 U	<0.059 U	**0.66 ***
Volatile Organic Compounds						
2-Butanone	None	NR	<0.025 U	<0.025 U	<0.023 U	NR
Carbon disulfide	None	NR	**0.0015 J***	**0.0011 J***	**0.0014 J***	NR
Toluene	None	NR	<0.0063 U	<0.0062 U	**0.00037 J***	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-063**	**ASYsb-064**	**ASYsb-064**	**ASYsb-064**	**ASYsb-065**
Sample ID		**ASYsb-063-5732-SO**	**ASYsb-064-6219-FD**	**ASYsb-064-5735-SO**	**ASYsb-064-5736-SO**	**ASYsb-065-5739-SO**
Date		**04/07/10**	**03/30/10**	**03/30/10**	**03/30/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria[b]**					
Inorganic Chemicals						
Aluminum	19500	10400	15700	15900	14900 J	12600
Antimony	0.96	0.098 J	0.1 J	0.085 J	0.13 J	0.1 J
Arsenic	19.8	7.8 J	10.8	9.4	18.1	3.8 J
Barium	124	50	78.5	105	102	104
Beryllium	0.88	0.52	0.54	0.56	**0.94 ***	0.52
Cadmium	0	**0.09 J***	**0.059 J***	<0.028 UJ	**0.074 J***	**0.079 J***
Calcium	35500	5600	926	973	1510 J	2540
Chromium	27.2	15.8	20.3	20.1	22.4 J	15.4
Cobalt	23.2	11.5 J	9.9	9.3	13.1 J	4.8 J
Copper	32.3	26.1	17.5 J	16.7 J	26	13.7
Iron	35200	31000	29100	24800	**36000 ***	17700
Lead	19.1	12.2 J	**31.6 J***	18.4 J	**33 ***	12.5 J
Magnesium	8790	5480	2800 J	3190 J	4200 J	2080
Manganese	3030	327	242	209	369	72.1
Mercury	0.044	<0.13 U	<0.13 U	<0.13 U	<0.12 U	0.031 J
Nickel	60.7	27.8 J	15.6 J	18.3 J	31.2 J	15.2 J
Potassium	3350	1420 J	1220	1230	1430 J	761 J
Selenium	1.5	1.4	1.1	1.3	**1.7 J***	1.5
Silver	0	<0.038 UJ	**0.046 J***	**0.035 J***	**0.047 J***	<0.049 UJ
Sodium	145	85.1 J	**147 ***	83.1 J	140	<64 UJ
Thallium	0.91	0.15 J	0.21 J	0.22 J	0.2 J	0.21 J
Vanadium	37.6	16.3 J	26.7	23.2	25.1	18.2 J
Zinc	93.3	68	54.9	56	73.7	53.4
Explosives/Propellants						
3-Nitrotoluene	None	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U
HMX	None	<0.24 U	<0.24 U	<0.24 U	<0.24 U	<0.24 U
Nitrocellulose	None	NR	NR	NR	NR	NR
Semi-volatile Organic Compounds						
Acenaphthene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Acenaphthylene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Anthracene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Benz(a)anthracene	None	**0.011 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Benzo(a)pyrene	None	**0.011 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Benzo(b)fluoranthene	None	**0.021 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Benzo(ghi)perylene	None	**0.018 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Benzo(k)fluoranthene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-063**	**ASYsb-064**	**ASYsb-064**	**ASYsb-064**	**ASYsb-065**
Sample ID		**ASYsb-063-5732-SO**	**ASYsb-064-6219-FD**	**ASYsb-064-5735-SO**	**ASYsb-064-5736-SO**	**ASYsb-065-5739-SO**
Date		**04/07/10**	**03/30/10**	**03/30/10**	**03/30/10**	**04/07/10**
Depth (ft)		**4.0 - 7.0**	**1.0 - 4.0**	**1.0 - 4.0**	**4.0 - 7.0**	**1.0 - 4.0**
Parameters Analyzed [a]	**Background Criteria**[b]	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**	**TAL Metals Explosives PAHs**
Analyte (mg/kg)						
Semi-volatile Organic Compounds, continued						
Bis(2-ethylhexyl)phthalate	None	NR	NR	NR	NR	NR
Chrysene	None	**0.014 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Dibenz(a,h)anthracene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Fluoranthene	None	**0.02 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Fluorene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Indeno(1,2,3-cd)pyrene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Naphthalene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Phenanthrene	None	<0.0085 U	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Pyrene	None	**0.017 ***	<0.0085 U	<0.0086 U	<0.0083 U	<0.0088 U
Volatile Organic Compounds						
2-Butanone	None	NR	NR	NR	NR	NR
Carbon disulfide	None	NR	NR	NR	NR	NR
Toluene	None	NR	NR	NR	NR	NR

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-065**
Sample ID		**ASYsb-065-5740-SO**
Date		**04/07/10**
Depth (ft)		**4.0 - 7.0**
Parameters Analyzed [a]		**TAL Metals Explosives PAHs**
Analyte (mg/kg)	**Background Criteria**[b]	
Inorganic Chemicals		
Aluminum	19500	17300
Antimony	0.96	0.13 J
Arsenic	19.8	4.7 J
Barium	124	121
Beryllium	0.88	0.63
Cadmium	0	**0.088 J***
Calcium	35500	2700 J
Chromium	27.2	17.3 J
Cobalt	23.2	3.9 J
Copper	32.3	23.4
Iron	35200	13100
Lead	19.1	15.8
Magnesium	8790	1620 J
Manganese	3030	61.9
Mercury	0.044	0.037 J
Nickel	60.7	13.5
Potassium	3350	919 J
Selenium	1.5	1 J
Silver	0	**0.13 J***
Sodium	145	77.3 J
Thallium	0.91	0.26 J
Vanadium	37.6	20.1 J
Zinc	93.3	52.8
Explosives/Propellants		
3-Nitrotoluene	None	<0.26 U
HMX	None	<0.26 U
Nitrocellulose	None	NR
Semi-volatile Organic Compounds		
Acenaphthene	None	<0.0092 U
Acenaphthylene	None	<0.0092 U
Anthracene	None	<0.0092 U
Benz(a)anthracene	None	<0.0092 U
Benzo(a)pyrene	None	<0.0092 U
Benzo(b)fluoranthene	None	<0.0092 U
Benzo(ghi)perylene	None	<0.0092 U
Benzo(k)fluoranthene	None	<0.0092 U

Table 4–14. Analytes Detected in PBA08 RI Subsurface Soil Samples (continued)

Location		**ASYsb-065**
Sample ID		**ASYsb-065-5740-SO**
Date		**04/07/10**
Depth (ft)		**4.0 - 7.0**
Parameters Analyzed [a]	**Background Criteria**[b]	**TAL Metals Explosives PAHs**
Analyte (mg/kg)		
Semi-volatile Organic Compounds, continued		
Bis(2-ethylhexyl)phthalate	None	NR
Chrysene	None	<0.0092 U
Dibenz(a,h)anthracene	None	<0.0092 U
Fluoranthene	None	<0.0092 U
Fluorene	None	<0.0092 U
Indeno(1,2,3-cd)pyrene	None	<0.0092 U
Naphthalene	None	<0.0092 U
Phenanthrene	None	<0.0092 U
Pyrene	None	<0.0092 U
Volatile Organic Compounds		
2-Butanone	None	NR
Carbon disulfide	None	NR
Toluene	None	NR

[a] Only detected analytes are presented in the table.
[b] Background concentrations are published in the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b).
ft = Feet.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
ID = Identification.
J = Estimated value less than reporting limits.
mg/kg = Milligrams per kilogram.
NR = Not reported/not analyzed.
PAH = Polycyclic Aromatic Hydrocarbon.
PCB = Polychlorinated Biphenyl.
PETN = Pentaerythritol Tetranitrate.
TAL = Target Analyte List.
R = Rejected.
RVAAP = Ravenna Army Ammunition Plant.
U= Non-detectable concentration.
UJ = Non-detectable concentration, reporting limit estimated.
*** = Result exceeds background concentration.**
< = Less than.

Table 4-15. Analytes Detected in PBA08 RI Sediment Samples

Location		**L12sd-308**
Sample ID		**L12sd-308-5004-SD**
Date		**02/15/10**
Depth (ft)		**0.0 - 0.5**
Parameters Analyzed [a]	**Background**	
Analyte (mg/kg)	**Criteria[b]**	**RVAAP Full Suite**
Inorganic Chemicals		
Aluminum	13900.00	13000 J
Arsenic	19.50	6.8
Barium	123.00	95.3 J
Beryllium	0.38	**0.74 ***
Cadmium	0.00	**0.51 ***
Calcium	5510.00	3580 J
Chromium	18.10	16.4
Cobalt	9.10	6.7
Copper	27.60	17
Iron	28200.00	18200
Lead	27.40	20.6 J
Magnesium	2760.00	2020
Manganese	1950.00	173
Mercury	0.06	**0.062 J***
Nickel	17.70	**18.2 ***
Potassium	1950.00	1150
Selenium	1.70	1.5 J
Silver	0.00	**0.078 J***
Sodium	112.00	**1290 ***
Thallium	0.89	0.19 J
Vanadium	26.10	18.1
Zinc	532.00	135
Semi-volatile Organic Compounds		
2-Methylnaphthalene	None	**0.041 J***
Acenaphthene	None	**0.03 J***
Acenaphthylene	None	**0.061 J***
Anthracene	None	**0.078 J***
Benz(a)anthracene	None	**0.35 ***
Benzo(a)pyrene	None	**0.41 ***
Benzo(b)fluoranthene	None	**0.68 ***
Benzo(ghi)perylene	None	**0.34 ***
Benzo(k)fluoranthene	None	**0.28 ***
Chrysene	None	**0.46 ***

Table 4-15. Analytes Detected in PBA08 RI Sediment Samples (continued)

Location		**L12sd-308**
Sample ID		**L12sd-308-5004-SD**
Date		**02/15/10**
Depth (ft)		**0.0 - 0.5**
Parameters Analyzed [a]	**Background**	
Analyte (mg/kg)	**Criteria**[b]	**RVAAP Full Suite**
Semi-volatile Organic Compounds, continued		
Dibenz(a,h)anthracene	None	**0.085 J***
Fluoranthene	None	**0.68 ***
Fluorene	None	**0.024 J***
Indeno(1,2,3-cd)pyrene	None	**0.31 ***
Naphthalene	None	**0.033 J***
Phenanthrene	None	**0.23 ***
Pyrene	None	**0.54 ***

[a] Only detected analytes are presented in the table.
[b] Background concentrations are published in the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b).
ft = Feet.
ID = Identification.
J = Estimated value less than reporting limits.
mg/kg = Milligrams per kilogram.
RVAAP = Ravenna Army Ammunition Plant.
*** = Result exceeds background concentration.**

Table 4-16. Analytes Detected in PBA08 RI Surface Water Samples

Location		**L12sw-308**
Sample ID		**L12sw-308-5005-SW**
Date		**02/15/10**
Parameters Analyzed [a]	**Background Criteria[b]**	**RVAAP Full Suite**
Analyte (mg/L)		
Inorganic Chemicals		
Aluminum	3.37	**21.3 J***
Antimony	0	**0.00051 J***
Arsenic	0.0032	**0.0144 ***
Barium	0.0475	**0.187 ***
Beryllium	0	**0.0012 ***
Cadmium	0	**0.0012 J***
Calcium	41.4	**55.3 ***
Chromium	0	**0.0231 ***
Cobalt	0	**0.0109 ***
Copper	0.0079	**0.0249 ***
Iron	2.56	**27.4 ***
Lead	0	**0.0365 ***
Magnesium	10.8	9.2
Manganese	0.391	**1.18 ***
Nickel	0	**0.0244 ***
Potassium	3.17	**5.12 ***
Selenium	0	**0.0019 J***
Sodium	21.3	3.11
Vanadium	0	**0.0367 ***
Zinc	0.042	**0.346 ***
Nitrate	None	**0.1 ***
Semi-volatile Organic Compounds		
Benz(a)anthracene	None	**0.00024 J***
Benzo(a)pyrene	None	**0.00022 J***
Benzo(b)fluoranthene	None	**0.00032 J***
Bis(2-ethylhexyl)phthalate	None	**0.0011 J***
Chrysene	None	**0.00022 J***
Fluoranthene	None	**0.00046 J***
Pyrene	None	**0.00033 J***
Pesticides/PCBs		
delta-BHC	None	**0.00001 J***

[a] Only detected analytes are presented in the table.
[b] Background concentrations are published in the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b).
BHC = Hexachlorobenzene.
ID = Identification.
J = estimated value less than reporting limits.
mg/L = Milligrams per Liter.
PCB = Polychlorinated biphenyl.
RVAAP = Ravenna Army Ammunition Plant.
*** = Result exceeds background concentration.**

Table 4-17. RVAAP Background Concentrations

Chemical	Surface Soil (mg/kg)	Subsurface soil (mg/kg)	Sediment (mg/kg)	Surface Water (mg/L)	Groundwater-Unconsolidated (mg/L)		Groundwater-Bedrock (mg/L)	
					Filtered	Unfiltered	Filtered	Unfiltered
Aluminum	17700	19500	13900	3.37	NA	48	NA	9.41
Antimony	0.96	0.96	0	0	0	0.0043	0	0
Arsenic	15.4	19.8	19.5	0.0032	0.0117	0.215	0	0.0191
Barium	88.4	124	123	0.0475	0.0821	0.327	0.256	0.241
Beryllium	0.88	0.88	0.38	0	0	0	0	0
Cadmium	0	0	0	0	0	0	0	0
Calcium	15800	35500	5510	41.4	115	194	53.1	48.2
Chromium	17.4	27.2	18.1	0	0.0073	0.0852	0	0.0195
Cobalt	10.4	23.2	9.1	0	0	0.0463	0	0
Copper	17.7	32.3	27.6	0.0079	0	0.289	0	0.017
Cyanide	0	0	0	0	0	0	0	0
Iron	23100	35200	28200	2.56	0.279	195	1.43	21.5
Lead	26.1	19.1	27.4	0	0	0.183	0	0.023
Magnesium	3030	8790	2760	10.8	43.3	58.4	15	13.7
Manganese	1450	3030	1950	0.391	1.02	2.86	1.34	1.26
Mercury	0.036	0.044	0.059	0	0	0.00025	0	0
Nickel	21.1	60.7	17.7	0	0	0.117	0.0834	0.0853
Potassium	927	3350	1950	3.17	2.89	7.48	5.77	6.06
Selenium	1.4	1.5	1.7	0	0	0.0057	0	0
Silver	0	0	0	0	0	0	0	0
Sodium	123	145	112	21.3	45.7	44.7	51.4	49.7
Thallium	0	0.91	0.89	0	0	0.0024	0	0
Vanadium	31.1	37.6	26.1	0	0	0.0981	0	0.0155
Zinc	61.8	93.3	532	0.042	0.0609	0.888	0.0523	0.193

Mg/kg = milligrams per kilogram.
Mg/L = milligrams per liter.
NA = Not available. Aluminum results were rejected in validation.

Table 4-18. Recommended Dietary Allowances/Recommended Daily Intake Values

Essential Human Nutrient	USDA RDA/RDI[a] Value
Calcium	1000 mg/d
Chloride[b]	3400 mg/d
Iodine	150 µg/d
Iron	8 mg/d
Magnesium	400 mg/d
Potassium[b]	4700 mg/d
Phosphorous	700 mg/d
Sodium[b]	2300 mg/d

Source= Values were obtained from http://fnic.nal.usda.gov charts.
[a] Dietary reference intakes vary by gender and age, values present are for life stage group: Males 19-30 years.
[b] Adequate Intake Value.
mg/d = Milligram per day.
RDA= Recommended Dietary Allowance.
RDI= Reference Daily Intake.
µg/d = Micrograms per day.
USDA = U.S. Department of Agriculture.

Table 4-19. Data Summary

Sample ID	Date	Sample Type	Use Type	Comments
Surface Soil (0–1 ft)				
ASYsb-045-5660-SO	4/5/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-045-6221-FD	4/5/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-046-5664-SO	4/5/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-047-5668-SO	4/5/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-048-5672-SO	4/5/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-048-6222-FD	4/5/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-049-5676-SO	4/5/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening
ASYsb-050-5680-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-052-5688-SO	4/6/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-053-5692-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-054-5696-SO	4/6/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-056-5702-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-057-5706-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-058-5710-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-059-5714-SO	3/30/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-060-5718-SO	3/30/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-061-5722-SO	3/30/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-062-5726-SO	3/30/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Surface Soil (0–1 ft), continued				
ASYsb-063-5730-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-064-5734-SO	3/30/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYsb-065-5738-SO	4/7/2010	D	N	Sample used for nature and extent evaluation only, as ISM data is used for surface soil screening.
ASYss-001M-SO	11/4/2004	ISM	N	Since this ISM area was re-sampled in 2010, data from 2004 used for nature and extent evaluation only.
ASYss-002M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-003M-SO	11/4/2004	ISM	N	Since this ISM area was re-sampled in 2010, data from 2004 used for nature and extent evaluation only.
ASYss-004D-SO	11/4/2004	ISM	N	Since this ISM area was re-sampled in 2010, data from 2004 used for nature and extent evaluation only.
ASYss-004M-SO	11/4/2004	ISM	N	Since this ISM area was re-sampled in 2010, data from 2004 used for nature and extent evaluation only.
ASYss-005D-SO	11/4/2004	ISM	S	Discrete sample collected for determining VOCs in ISM area; used for screening with ISM surface soil samples.
ASYss-005M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-006M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-007M-DUP	11/4/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-007M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-008M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-009M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-010M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-011M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-012D-QA	11/4/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-012D-SO	11/4/2004	ISM	S	Discrete sample collected for determining VOCs in ISM area; used for screening with ISM surface soil samples.
ASYss-012M-QA	11/4/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-012M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-013D-SO	11/3/2004	ISM	S	Discrete sample collected for determining VOCs in ISM area; used for screening with ISM surface soil samples.
ASYss-013M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-014M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Surface Soil (0–1 ft), continued				
ASYss-015D-SO	11/4/2004	ISM	S	Discrete sample collected for determining VOCs in ISM area; used for screening with ISM surface soil samples.
ASYss-015M-SO	11/4/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-016M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-017M-DUP	11/3/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-017M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-018M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-019M-SO	11/10/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-020M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-021M-DUP	11/3/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-021M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-022M-QA	11/11/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-022M-SO	11/12/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-023M-SO	11/11/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-025M-SO	11/11/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-026M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-027D-DUP	11/3/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-027D-SO	11/3/2004	ISM	S	Discrete sample collected for determining VOCs in ISM area; used for screening with ISM surface soil samples.
ASYss-027M-DUP	11/3/2004	ISM	FD	QC sample limits use to nature and extent.
ASYss-027M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-028M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-029M-SO	11/11/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-030M-SO	11/10/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-031M-SO	11/10/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-032M-SO	11/2/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-033M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-034M-SO	11/3/2004	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-066-5778-SO	4/7/2010	D	C	Sample used for chromium speciation, and nature and extent evaluation.
ASYss-067-5779-SO	4/7/2010	D	C	Sample used for chromium speciation, and nature and extent evaluation.
ASYss-069M-5743-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-070M-5744-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-070M-6209-FD	4/5/2010	ISM	FD	QC sample limits use to nature and extent.
ASYss-071M-5745-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Surface Soil (0–1 ft), continued				
ASYss-072M-5746-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-073M-5747-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-074M-5748-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-075M-5749-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-076M-5750-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-076M-6211-FD	4/6/2010	ISM	FD	QC sample limits use to nature and extent.
ASYss-077M-5751-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-078M-5752-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-079M-5753-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-080M-5754-SO	4/7/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-081M-5755-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-082M-5756-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-083M-5757-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-084M-5758-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-085M-5759-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-086M-5760-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-087M-5761-SO	4/2/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-088M-5756-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-089M-5763-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-090M-5764-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-091M-5765-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-092M-5766-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-093M-5767-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-094M-5768-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-095M-5769-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-096M-5770-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-097M-5771-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-098M-5772-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-099M-5773-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-100M-5774-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-101M-5775-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-102M-5776-SO	4/6/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-103M-5777-SO	4/5/2010	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-103M-6213-FD	4/5/2010	ISM	FD	QC sample limits use to nature and extent.

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Surface Soil (0–1 ft), continued				
ASYss-111M-5835-SO	4/20/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-112M-5836-SO	4/20/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-113M-5837-SO	4/20/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-114M-5838-SO	4/20/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-115M-5839-SO	4/20/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-116M-5840-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-117M-5841-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-118M-5842-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-119M-5843-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-120M-5844-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-121M-5845-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-122M-5846-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-123M-5847-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-124M-5848-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-125M-5849-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-125M-6238-FD	4/21/2011	ISM	FD	QC sample limits use to nature and extent.
ASYss-126M-5850-SO	4/21/2011	ISM	S	Sample used for nature and extent evaluation and surface soil screening.
ASYss-126M-6239-FD	4/21/2011	ISM	FD	QC sample limits use to nature and extent.
Subsurface Soil (>1 ft)				
ASYsb-045-5661-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-046-5665-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-047-5669-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-048-5673-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-049-5677-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-050-5681-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-052-5689-SO	4/6/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-053-5693-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-054-5697-SO	4/6/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-056-5703-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-057-5707-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-058-5711-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-059-5715-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-060-5719-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-061-5723-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Subsurface Soil (>1 ft), continued				
ASYsb-062-5727-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-062-6218-FD	3/30/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-063-5731-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-064-5735-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-064-6219-FD	3/30/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-065-5739-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (1–4 ft interval).
ASYsb-045-5662-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-046-5666-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-047-5670-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-047-6223-FD	4/5/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-048-5674-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-049-5678-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-050-5682-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-052-5690-SO	4/6/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-053-5694-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-054-5698-SO	4/6/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-056-5704-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-057-5708-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-058-5712-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-059-5716-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-059-6220-FD	3/30/2010	D	FD	QC sample limits use to nature and extent.
ASYsb-060-5720-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-061-5724-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-062-5728-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-063-5732-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-064-5736-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-065-5740-SO	4/7/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (4–7 ft interval).
ASYsb-045-5663-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (7–13 ft interval).
ASYsb-049-5679-SO	4/5/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (7–13 ft interval).
ASYsb-049-5686-SO	4/6/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (7–13 ft interval).

Table 4-19. Data Summary (continued)

Sample ID	Date	Sample Type	Use Type	Comments
Subsurface Soil (>1 ft), continued				
ASYsb-059-5717-SO	3/30/2010	D	S	Sample used for nature and extent evaluation and subsurface soil screening (7-13 ft interval).
Sediment				
L12sd-308-5004-SD	2/15/2010	D	S	Sample used for nature and extent evaluation and discrete sediment screening. This sample was associated with Load Line 12, and was collected in the drainage ditch immediately east of Atlas Scrap Yard along Paris-Windham Road.
ASYsd-024M-SD	11/11/2004	ISM	S	Sample collected in the drainage ditch immediately east of Atlas Scrap Yard and Paris-Windham Road used for nature and extent evaluation and ISM sediment screening.
Surface Water				
L12sw-308-5005-SW	2/15/2010	D	S	Sample used for nature and extent evaluation and SRC/COPC screening. This sample was associated with Load Line 12, and was collected in the drainage ditch immediately east of Atlas Scrap Yard along Paris-Windham Road.

Samples collected in 2004 were a part of the Characterization of 14 AOCs.
Samples collected in 2010 and 2011 were part of the PBA08 Remedial Investigation.
C = Chromium speciation sample.
COPC = Chemical of potential concern.
D = Discrete.
FD = Field duplicate.
ft = Feet.
ID = Identification.
ISM = Incremental Sampling Method.
N = Nature and extent use only.
QC = Quality control.
S = Nature and extent, SRC and COPC screen, and sample point by sample point risk assessment.
SRC = Site-related contaminant.
VOC = Volatile organic compound.

Table 4-20. SRC Screening Summary for Surface Soil

Analyte	CAS Number	Frequency of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Inorganic Chemicals								
Aluminum	**7429-90-5**	**81/ 81**	**8100**	**32100**	**14200**	**17700**	**Yes**	**Exceeds background**
Antimony	7440-36-0	51/ 78	0.072	0.65	0.354	0.96	No	Below background
Arsenic	**7440-38-2**	**81/ 81**	**3.7**	**41**	**9.31**	**15.4**	**Yes**	**Exceeds background**
Barium	**7440-39-3**	**81/ 81**	**51**	**325**	**132**	**88.4**	**Yes**	**Exceeds background**
Beryllium	**7440-41-7**	**81/ 81**	**0.38**	**6.3**	**1.56**	**0.88**	**Yes**	**Exceeds background**
Cadmium	**7440-43-9**	**74/ 81**	**0.09**	**9.5**	**0.455**	**0**	**Yes**	**Exceeds background**
Calcium	7440-70-2	81/ 81	910	178000	38700	15800	No	Essential Nutrient
Chromium	**7440-47-3**	**81/ 81**	**11.5**	**64**	**23.9**	**17.4**	**Yes**	**Exceeds background**
Cobalt	**7440-48-4**	**81/ 81**	**1.5**	**19**	**6.24**	**10.4**	**Yes**	**Exceeds background**
Copper	**7440-50-8**	**81/ 81**	**7.2**	**250**	**20.7**	**17.7**	**Yes**	**Exceeds background**
Iron	7439-89-6	81/ 81	8190	42100	18800	23100	No	Essential Nutrient
Lead	**7439-92-1**	**81/ 81**	**11.1**	**1200**	**50.4**	**26.1**	**Yes**	**Exceeds background**
Magnesium	7439-95-4	81/ 81	1390	27100	6150	3030	No	Essential Nutrient
Manganese	**7439-96-5**	**81/ 81**	**95**	**3600**	**1100**	**1450**	**Yes**	**Exceeds background**
Mercury	**7439-97-6**	**72/ 81**	**0.018**	**0.64**	**0.069**	**0.036**	**Yes**	**Exceeds background**
Nickel	**7440-02-0**	**81/ 81**	**7.2**	**31**	**17**	**21.1**	**Yes**	**Exceeds background**
Potassium	7440-09-7	81/ 81	577	1980	1190	927	No	Essential Nutrient
Selenium	**7782-49-2**	**73/ 81**	**0.46**	**2.9**	**1.14**	**1.4**	**Yes**	**Exceeds background**
Silver	**7440-22-4**	**46/ 81**	**0.024**	**5.2**	**0.398**	**0**	**Yes**	**Exceeds background**
Sodium	7440-23-5	81/ 81	37.1	2430	361	123	No	Essential Nutrient
Thallium	**7440-28-0**	**53/ 81**	**0.066**	**0.35**	**0.199**	**0**	**Yes**	**Exceeds background**
Vanadium	7440-62-2	81/ 81	4.5	26	16.6	31.1	No	Below background
Zinc	**7440-66-6**	**81/ 81**	**28.3**	**1800**	**104**	**61.8**	**Yes**	**Exceeds background**

Table 4–20. SRC Screening Summary for Surface Soil (continued)

Analyte	CAS Number	Frequency of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Explosives/Propellants								
1,3,5-Trinitrobenzene	99-35-4	4/ 65	0.014	0.16	0.0929	None	Yes	Detected organic
2,6-Dinitrotoluene	606-20-2	1/ 65	0.13	0.13	0.124	None	Yes	Detected organic
2-Amino-4,6-Dinitrotoluene	35572-78-2	2/ 65	0.09	0.1	0.124	None	Yes	Detected organic
2-Nitrotoluene	88-72-2	2/ 65	0.24	0.43	0.131	None	Yes	Detected organic
3-Nitrotoluene	99-08-1	4/ 65	0.053	0.12	0.123	None	Yes	Detected organic
4-Amino-2,6-Dinitrotoluene	19406-51-0	6/ 65	0.029	0.21	0.149	None	Yes	Detected organic
HMX	2691-41-0	1/ 65	0.016	0.016	0.123	None	Yes	Detected organic
Nitrocellulose	9004-70-0	5/ 6	1	4.2	1.98	None	Yes	Detected organic
Tetryl	479-45-8	4/ 65	0.04	0.14	0.181	None	Yes	Detected organic
Semi-volatile Organic Compounds								
2-Methylnaphthalene	91-57-6	7/ 7	0.012	2.2	0.553	None	Yes	Detected organic
4-Methylphenol	106-44-5	1/ 3	0.015	0.015	0.0277	None	Yes	Detected organic
Acenaphthene	83-32-9	46/ 54	0.0054	10	0.371	None	Yes	Detected organic
Acenaphthylene	208-96-8	51/ 54	0.0098	2.5	0.426	None	Yes	Detected organic
Anthracene	120-12-7	53/ 54	0.0069	23	1.55	None	Yes	Detected organic
Benz(a)anthracene	56-55-3	54/ 54	0.015	51	3.97	None	Yes	Detected organic
Benzenemethanol	100-51-6	1/ 7	0.25	0.25	0.882	None	Yes	Detected organic
Benzo(a)pyrene	50-32-8	54/ 54	0.015	50	4.11	None	Yes	Detected organic
Benzo(b)fluoranthene	205-99-2	54/ 54	0.035	51	6.51	None	Yes	Detected organic
Benzo(ghi)perylene	191-24-2	54/ 54	0.014	29	2.73	None	Yes	Detected organic
Benzo(k)fluoranthene	207-08-9	54/ 54	0.013	37	3.05	None	Yes	Detected organic
Bis(2-ethylhexyl)phthalate	117-81-7	3/ 7	0.024	1.5	0.96	None	Yes	Detected organic
Butyl benzyl phthalate	85-68-7	1/ 7	0.24	0.24	0.79	None	Yes	Detected organic
Carbazole	86-74-8	4/ 7	0.043	0.44	0.213	None	Yes	Detected organic
Chrysene	218-01-9	54/ 54	0.029	49	5.17	None	Yes	Detected organic
Di-n-butyl phthalate	84-74-2	1/ 7	0.027	0.027	0.762	None	Yes	Detected organic
Dibenz(a,h)anthracene	53-70-3	51/ 54	0.0078	7.7	0.843	None	Yes	Detected organic
Dibenzofuran	132-64-9	6/ 7	0.011	0.51	0.166	None	Yes	Detected organic
Diethyl phthalate	84-66-2	1/ 7	0.023	0.023	0.74	None	Yes	Detected organic

Table 4–20. SRC Screening Summary for Surface Soil (continued)

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Semi-volatile Organic Compounds, continued								
Fluoranthene	**206-44-0**	**54/ 54**	**0.041**	**130**	**7**	**None**	**Yes**	**Detected organic**
Fluorene	**86-73-7**	**51/ 54**	**0.0084**	**8.5**	**0.35**	**None**	**Yes**	**Detected organic**
Indeno(1,2,3-cd)pyrene	**193-39-5**	**54/ 54**	**0.0072**	**26**	**2.54**	**None**	**Yes**	**Detected organic**
Naphthalene	**91-20-3**	**52/ 54**	**0.013**	**1.4**	**0.228**	**None**	**Yes**	**Detected organic**
Phenanthrene	**85-01-8**	**54/ 54**	**0.033**	**53**	**2.3**	**None**	**Yes**	**Detected organic**
Phenol	**108-95-2**	**2/ 7**	**0.0083**	**0.031**	**0.763**	**None**	**Yes**	**Detected organic**
Pyrene	**129-00-0**	**54/ 54**	**0.027**	**94**	**5.93**	**None**	**Yes**	**Detected organic**
Pesticides and PCBs								
PCB-1260	**11096-82-5**	**2/ 6**	**0.019**	**0.17**	**0.0428**	**None**	**Yes**	**Detected organic**
Volatile Organic Compounds								
Acetone	**67-64-1**	**1/ 9**	**0.022**	**0.022**	**0.0131**	**None**	**Yes**	**Detected organic**

[a] Background concentrations are published in the Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
SRC screening tables include all available and appropriate data as presented in Section 4.4.4.
Bold indicates analyte identified as an SRC.
CAS = Chemical Abstract Service.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
mg/kg = Milligrams per kilogram.
PCB = Polychlorinated Biphenyl.
SRC = Site-related Contaminant.

Table 4-21. SRC Screening Summary for Subsurface Soil

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Inorganic Chemicals								
Arsenic	7440-38-2	41/ 41	3.8	25.2	14.1	19.8	Yes	Exceeds background
Beryllium	7440-41-7	41/ 41	0.31	1.2	0.659	0.88	Yes	Exceeds background
Cadmium	7440-43-9	39/ 41	0.027	0.32	0.0731	0	Yes	Exceeds background
Cobalt	7440-48-4	41/ 41	3.9	33.7	12.9	23.2	Yes	Exceeds background
Lead	7439-92-1	41/ 41	8.4	33	13.1	19.1	Yes	Exceeds background
Selenium	7782-49-2	41/ 41	0.67	1.8	1.2	1.5	Yes	Exceeds background
Silver	7440-22-4	21/ 41	0.0089	0.13	0.0221	0	Yes	Exceeds background
Explosives/Propellants								
3-Nitrotoluene	99-08-1	1/ 41	0.021	0.021	0.12	None	Yes	Detected organic
HMX	2691-41-0	1/ 41	0.014	0.014	0.12	None	Yes	Detected organic
Nitrocellulose	9004-70-0	1/ 6	2	2	2.83	None	Yes	Detected organic
Semi-volatile Organic Compounds								
Acenaphthene	83-32-9	1/ 42	0.015	0.015	0.0087	None	Yes	Detected organic
Acenaphthylene	208-96-8	1/ 42	0.03	0.03	0.00905	None	Yes	Detected organic
Anthracene	120-12-7	3/ 42	0.011	0.075	0.0105	None	Yes	Detected organic
Benz(a)anthracene	56-55-3	3/ 42	0.011	0.35	0.0178	None	Yes	Detected organic
Benzo(a)pyrene	50-32-8	3/ 42	0.011	0.43	0.0196	None	Yes	Detected organic
Benzo(b)fluoranthene	205-99-2	3/ 42	0.021	0.62	0.0252	None	Yes	Detected organic
Benzo(ghi)perylene	191-24-2	4/ 42	0.0097	0.29	0.0165	None	Yes	Detected organic
Benzo(k)fluoranthene	207-08-9	2/ 42	0.024	0.28	0.0155	None	Yes	Detected organic
Bis(2-ethylhexyl)phthalate	117-81-7	1/ 7	0.036	0.036	0.174	None	Yes	Detected organic
Chrysene	218-01-9	4/ 42	0.012	0.47	0.0211	None	Yes	Detected organic
Dibenz(a,h)anthracene	53-70-3	1/ 42	0.074	0.074	0.0101	None	Yes	Detected organic
Fluoranthene	206-44-0	4/ 42	0.019	0.82	0.0295	None	Yes	Detected organic
Fluorene	86-73-7	1/ 42	0.021	0.021	0.00884	None	Yes	Detected organic
Indeno(1,2,3-cd)pyrene	193-39-5	2/ 42	0.027	0.27	0.0153	None	Yes	Detected organic
Naphthalene	91-20-3	3/ 42	0.018	0.11	0.012	None	Yes	Detected organic
Phenanthrene	85-01-8	3/ 42	0.014	0.23	0.0158	None	Yes	Detected organic
Pyrene	129-00-0	5/ 42	0.0082	0.66	0.0257	None	Yes	Detected organic

Table 4–21. SRC Screening Summary for Subsurface Soil (continued)

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Volatile Organic Compounds								
2-Butanone	78-93-3	1/ 7	0.0098	0.0098	0.0116	None	Yes	Detected organic
Carbon disulfide	75-15-0	3/ 7	0.00062	0.0014	0.00218	None	Yes	Detected organic
Toluene	108-88-3	1/ 7	0.00037	0.00037	0.00265	None	Yes	Detected organic

[a] Background concentrations are published in the Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
SRC screening tables include all available and appropriate data as presented in Section 4.4.4.
CAS = Chemical Abstract Service.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
mg/kg = Milligrams per kilogram.
SRC = Site-related Contaminant.

Table 4-22. SRC Screening Summary for ISM Sediment

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Inorganic Chemicals								
Aluminum	**7429-90-5**	**1/ 1**	**15000**	**15000**	**15000**	**13900**	**Yes**	**Exceeds background**
Arsenic	7440-38-2	1/ 1	10	10	10	19.5	No	Below background
Barium	**7440-39-3**	**1/ 1**	**140**	**140**	**140**	**123**	**Yes**	**Exceeds background**
Beryllium	**7440-41-7**	**1/ 1**	**1.2**	**1.2**	**1.2**	**0.38**	**Yes**	**Exceeds background**
Cadmium	**7440-43-9**	**1/ 1**	**1.8**	**1.8**	**1.8**	**0**	**Yes**	**Exceeds background**
Calcium	7440-70-2	1/ 1	5500	5500	5500	5510	No	Essential Nutrient
Chromium	**7440-47-3**	**1/ 1**	**20**	**20**	**20**	**18.1**	**Yes**	**Exceeds background**
Cobalt	7440-48-4	1/ 1	7.3	7.3	7.3	9.1	No	Below background
Copper	**7440-50-8**	**1/ 1**	**31**	**31**	**31**	**27.6**	**Yes**	**Exceeds background**
Iron	7439-89-6	1/ 1	17000	17000	17000	28200	No	Essential Nutrient
Lead	**7439-92-1**	**1/ 1**	**37**	**37**	**37**	**27.4**	**Yes**	**Exceeds background**
Magnesium	7439-95-4	1/ 1	2100	2100	2100	2760	No	Essential Nutrient
Manganese	7439-96-5	1/ 1	420	420	420	1950	No	Below background
Mercury	**7439-97-6**	**1/ 1**	**0.14**	**0.14**	**0.14**	**0.059**	**Yes**	**Exceeds background**
Nickel	**7440-02-0**	**1/ 1**	**20**	**20**	**20**	**17.7**	**Yes**	**Exceeds background**
Potassium	7440-09-7	1/ 1	1400	1400	1400	1950	No	Essential Nutrient
Selenium	**7782-49-2**	**1/ 1**	**2.7**	**2.7**	**2.7**	**1.7**	**Yes**	**Exceeds background**
Sodium	7440-23-5	1/ 1	450	450	450	112	No	Essential Nutrient
Vanadium	7440-62-2	1/ 1	24	24	24	26.1	No	Below background
Zinc	7440-66-6	1/ 1	310	310	310	532	No	Below background
Explosives/Propellants								
2-Amino-4,6-Dinitrotoluene	**35572-78-2**	**1/ 1**	**0.08**	**0.08**	**0.08**	**None**	**Yes**	**Detected organic**

[a] Background concentrations are published in the Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
SRC screening tables include all available and appropriate data as presented in Section 4.4.4.
CAS = Chemical Abstract Service.
mg/kg = miligrams per kilogram.
SRC = Site-related Contaminant.
Bold indicates analyte identified as an SRC.

Table 4-23. SRC Screening Summary for Discrete Sediment

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Inorganic Chemicals								
Aluminum	7429-90-5	1/ 1	13000	13000	13000	13900	No	Below background
Arsenic	7440-38-2	1/ 1	6.8	6.8	6.8	19.5	No	Below background
Barium	7440-39-3	1/ 1	95.3	95.3	95.3	123	No	Below background
Beryllium	**7440-41-7**	**1/ 1**	**0.74**	**0.74**	**0.74**	**0.38**	**Yes**	**Exceeds background**
Cadmium	**7440-43-9**	**1/ 1**	**0.51**	**0.51**	**0.51**	**0**	**Yes**	**Exceeds background**
Calcium	7440-70-2	1/ 1	3580	3580	3580	5510	No	Essential Nutrient
Chromium	7440-47-3	1/ 1	16.4	16.4	16.4	18.1	No	Below background
Cobalt	7440-48-4	1/ 1	6.7	6.7	6.7	9.1	No	Below background
Copper	7440-50-8	1/ 1	17	17	17	27.6	No	Below background
Iron	7439-89-6	1/ 1	18200	18200	18200	28200	No	Essential Nutrient
Lead	7439-92-1	1/ 1	20.6	20.6	20.6	27.4	No	Below background
Magnesium	7439-95-4	1/ 1	2020	2020	2020	2760	No	Essential Nutrient
Manganese	7439-96-5	1/ 1	173	173	173	1950	No	Below background
Mercury	**7439-97-6**	**1/ 1**	**0.062**	**0.062**	**0.062**	**0.059**	**Yes**	**Exceeds background**
Nickel	**7440-02-0**	**1/ 1**	**18.2**	**18.2**	**18.2**	**17.7**	**Yes**	**Exceeds background**
Potassium	7440-09-7	1/ 1	1150	1150	1150	1950	No	Essential Nutrient
Selenium	7782-49-2	1/ 1	1.5	1.5	1.5	1.7	No	Below background
Silver	**7440-22-4**	**1/ 1**	**0.078**	**0.078**	**0.078**	**0**	**Yes**	**Exceeds background**
Sodium	7440-23-5	1/ 1	1290	1290	1290	112	No	Essential Nutrient
Thallium	7440-28-0	1/ 1	0.19	0.19	0.19	0.89	No	Below background
Semi-volatile Organic Compounds								
2-Methylnaphthalene	**91-57-6**	**1/ 1**	**0.041**	**0.041**	**0.041**	**None**	**Yes**	**Detected organic**
Acenaphthene	**83-32-9**	**1/ 1**	**0.03**	**0.03**	**0.03**	**None**	**Yes**	**Detected organic**
Acenaphthylene	**208-96-8**	**1/ 1**	**0.061**	**0.061**	**0.061**	**None**	**Yes**	**Detected organic**
Anthracene	**120-12-7**	**1/ 1**	**0.078**	**0.078**	**0.078**	**None**	**Yes**	**Detected organic**
Benz(a)anthracene	**56-55-3**	**1/ 1**	**0.35**	**0.35**	**0.35**	**None**	**Yes**	**Detected organic**
Benzo(a)pyrene	**50-32-8**	**1/ 1**	**0.41**	**0.41**	**0.41**	**None**	**Yes**	**Detected organic**
Benzo(b)fluoranthene	**205-99-2**	**1/ 1**	**0.68**	**0.68**	**0.68**	**None**	**Yes**	**Detected organic**
Benzo(ghi)perylene	**191-24-2**	**1/ 1**	**0.34**	**0.34**	**0.34**	**None**	**Yes**	**Detected organic**

Table 4–23. SRC Screening Summary for Discrete Sediment (continued)

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/kg)	Maximum Detect (mg/kg)	Average Result (mg/kg)	Background Criteria[a] (mg/kg)	SRC? (yes/no)	SRC Justification
Semi-volatile Organic Compounds, continued								
Benzo(k)fluoranthene	**207-08-9**	**1/ 1**	**0.28**	**0.28**	**0.28**	**None**	**Yes**	**Detected organic**
Chrysene	**218-01-9**	**1/ 1**	**0.46**	**0.46**	**0.46**	**None**	**Yes**	**Detected organic**
Dibenz(a,h)anthracene	**53-70-3**	**1/ 1**	**0.085**	**0.085**	**0.085**	**None**	**Yes**	**Detected organic**
Fluoranthene	**206-44-0**	**1/ 1**	**0.68**	**0.68**	**0.68**	**None**	**Yes**	**Detected organic**
Fluorene	**86-73-7**	**1/ 1**	**0.024**	**0.024**	**0.024**	**None**	**Yes**	**Detected organic**
Indeno(1,2,3-cd)pyrene	**193-39-5**	**1/ 1**	**0.31**	**0.31**	**0.31**	**None**	**Yes**	**Detected organic**
Naphthalene	**91-20-3**	**1/ 1**	**0.033**	**0.033**	**0.033**	**None**	**Yes**	**Detected organic**
Phenanthrene	**85-01-8**	**1/ 1**	**0.23**	**0.23**	**0.23**	**None**	**Yes**	**Detected organic**
Pyrene	**129-00-0**	**1/ 1**	**0.54**	**0.54**	**0.54**	**None**	**Yes**	**Detected organic**

[a] Background concentrations are published in the Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
SRC screening tables include all available and appropriate data as presented in Section 4.4.4.
CAS = Chemical Abstract Service.
mg/kg = Miligrams per kilogram.
SRC = Site-related Contaminant.
Bold indicates analyte identified as an SRC.


Table 4-24. SRC Screening for Surface Water

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/L)	Maximum Detect (mg/L)	Average Result (mg/L)	Background Criteria[a] (mg/L)	SRC? (yes/no)	SRC Justification
Inorganic Chemicals								
Aluminum	**7429-90-5**	**1/ 1**	**21.3**	**21.3**	**21.3**	**3.37**	**Yes**	**Exceeds background**
Antimony	**7440-36-0**	**1/ 1**	**0.00051**	**0.00051**	**0.00051**	**0**	**Yes**	**Exceeds background**
Arsenic	**7440-38-2**	**1/ 1**	**0.0144**	**0.0144**	**0.0144**	**0.0032**	**Yes**	**Exceeds background**
Barium	**7440-39-3**	**1/ 1**	**0.187**	**0.187**	**0.187**	**0.0475**	**Yes**	**Exceeds background**
Beryllium	**7440-41-7**	**1/ 1**	**0.0012**	**0.0012**	**0.0012**	**0**	**Yes**	**Exceeds background**
Cadmium	**7440-43-9**	**1/ 1**	**0.0012**	**0.0012**	**0.0012**	**0**	**Yes**	**Exceeds background**
Calcium	7440-70-2	1/ 1	55.3	55.3	55.3	41.4	No	Essential Nutrient
Chromium	**7440-47-3**	**1/ 1**	**0.0231**	**0.0231**	**0.0231**	**0**	**Yes**	**Exceeds background**
Cobalt	**7440-48-4**	**1/ 1**	**0.0109**	**0.0109**	**0.0109**	**0**	**Yes**	**Exceeds background**
Copper	**7440-50-8**	**1/ 1**	**0.0249**	**0.0249**	**0.0249**	**0.0079**	**Yes**	**Exceeds background**
Iron	**7439-89-6**	**1/ 1**	**27.4**	**27.4**	**27.4**	**2.56**	**Yes**	**Exceeds background**
Lead	**7439-92-1**	**1/ 1**	**0.0365**	**0.0365**	**0.0365**	**0**	**Yes**	**Exceeds background**
Magnesium	7439-95-4	1/ 1	9.2	9.2	9.2	10.8	No	Essential Nutrient
Manganese	**7439-96-5**	**1/ 1**	**1.18**	**1.18**	**1.18**	**0.391**	**Yes**	**Exceeds background**
Nickel	**7440-02-0**	**1/ 1**	**0.0244**	**0.0244**	**0.0244**	**0**	**Yes**	**Exceeds background**
Potassium	7440-09-7	1/ 1	5.12	5.12	5.12	3.17	No	Essential Nutrient
Selenium	**7782-49-2**	**1/ 1**	**0.0019**	**0.0019**	**0.0019**	**0**	**Yes**	**Exceeds background**
Sodium	7440-23-5	1/ 1	3.11	3.11	3.11	21.3	No	Essential Nutrient
Vanadium	**7440-62-2**	**1/ 1**	**0.0367**	**0.0367**	**0.0367**	**0**	**Yes**	**Exceeds background**
Zinc	**7440-66-6**	**1/ 1**	**0.346**	**0.346**	**0.346**	**0.042**	**Yes**	**Exceeds background**
Nitrate	**14797-55-8**	**1/ 1**	**0.1**	**0.1**	**0.1**	**None**	**Yes**	**Exceeds background**

Table 4–24. SRC Screening for Surface Water (continued)

Analyte	CAS Number	Freq of Detect	Minimum Detect (mg/L)	Maximum Detect (mg/L)	Average Result (mg/L)	Background Criteria[a] (mg/L)	SRC? (yes/no)	SRC Justification
Semi-volatile Organic Compounds								
Benz(a)anthracene	**56-55-3**	**1/ 1**	**0.00024**	**0.00024**	**0.00024**	**None**	**Yes**	**Detected organic**
Benzo(a)pyrene	**50-32-8**	**1/ 1**	**0.00022**	**0.00022**	**0.00022**	**None**	**Yes**	**Detected organic**
Benzo(b)fluoranthene	**205-99-2**	**1/ 1**	**0.00032**	**0.00032**	**0.00032**	**None**	**Yes**	**Detected organic**
Bis(2-ethylhexyl)phthalate	**117-81-7**	**1/ 1**	**0.0011**	**0.0011**	**0.0011**	**None**	**Yes**	**Detected organic**
Chrysene	**218-01-9**	**1/ 1**	**0.00022**	**0.00022**	**0.00022**	**None**	**Yes**	**Detected organic**
Fluoranthene	**206-44-0**	**1/ 1**	**0.00046**	**0.00046**	**0.00046**	**None**	**Yes**	**Detected organic**
Pyrene	**129-00-0**	**1/ 1**	**0.00033**	**0.00033**	**0.00033**	**None**	**Yes**	**Detected organic**
Pesticides/PCBs								
delta-BHC	**319-86-8**	**1/ 1**	**0.000014**	**0.000014**	**0.000014**	**None**	**Yes**	**Detected organic**

[a] Background concentrations are published in the Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
SRC screening tables include all available and appropriate data as presented in Section 4.4.4.
BHC = Hexachlorobenzene.
CAS = Chemical Abstract Service.
mg/L = Miligrams per liter.
SRC = Site-related Contaminant.
PCB = Polychlorinated Biphenyl.
Bold indicates analyte identified as an SRC.

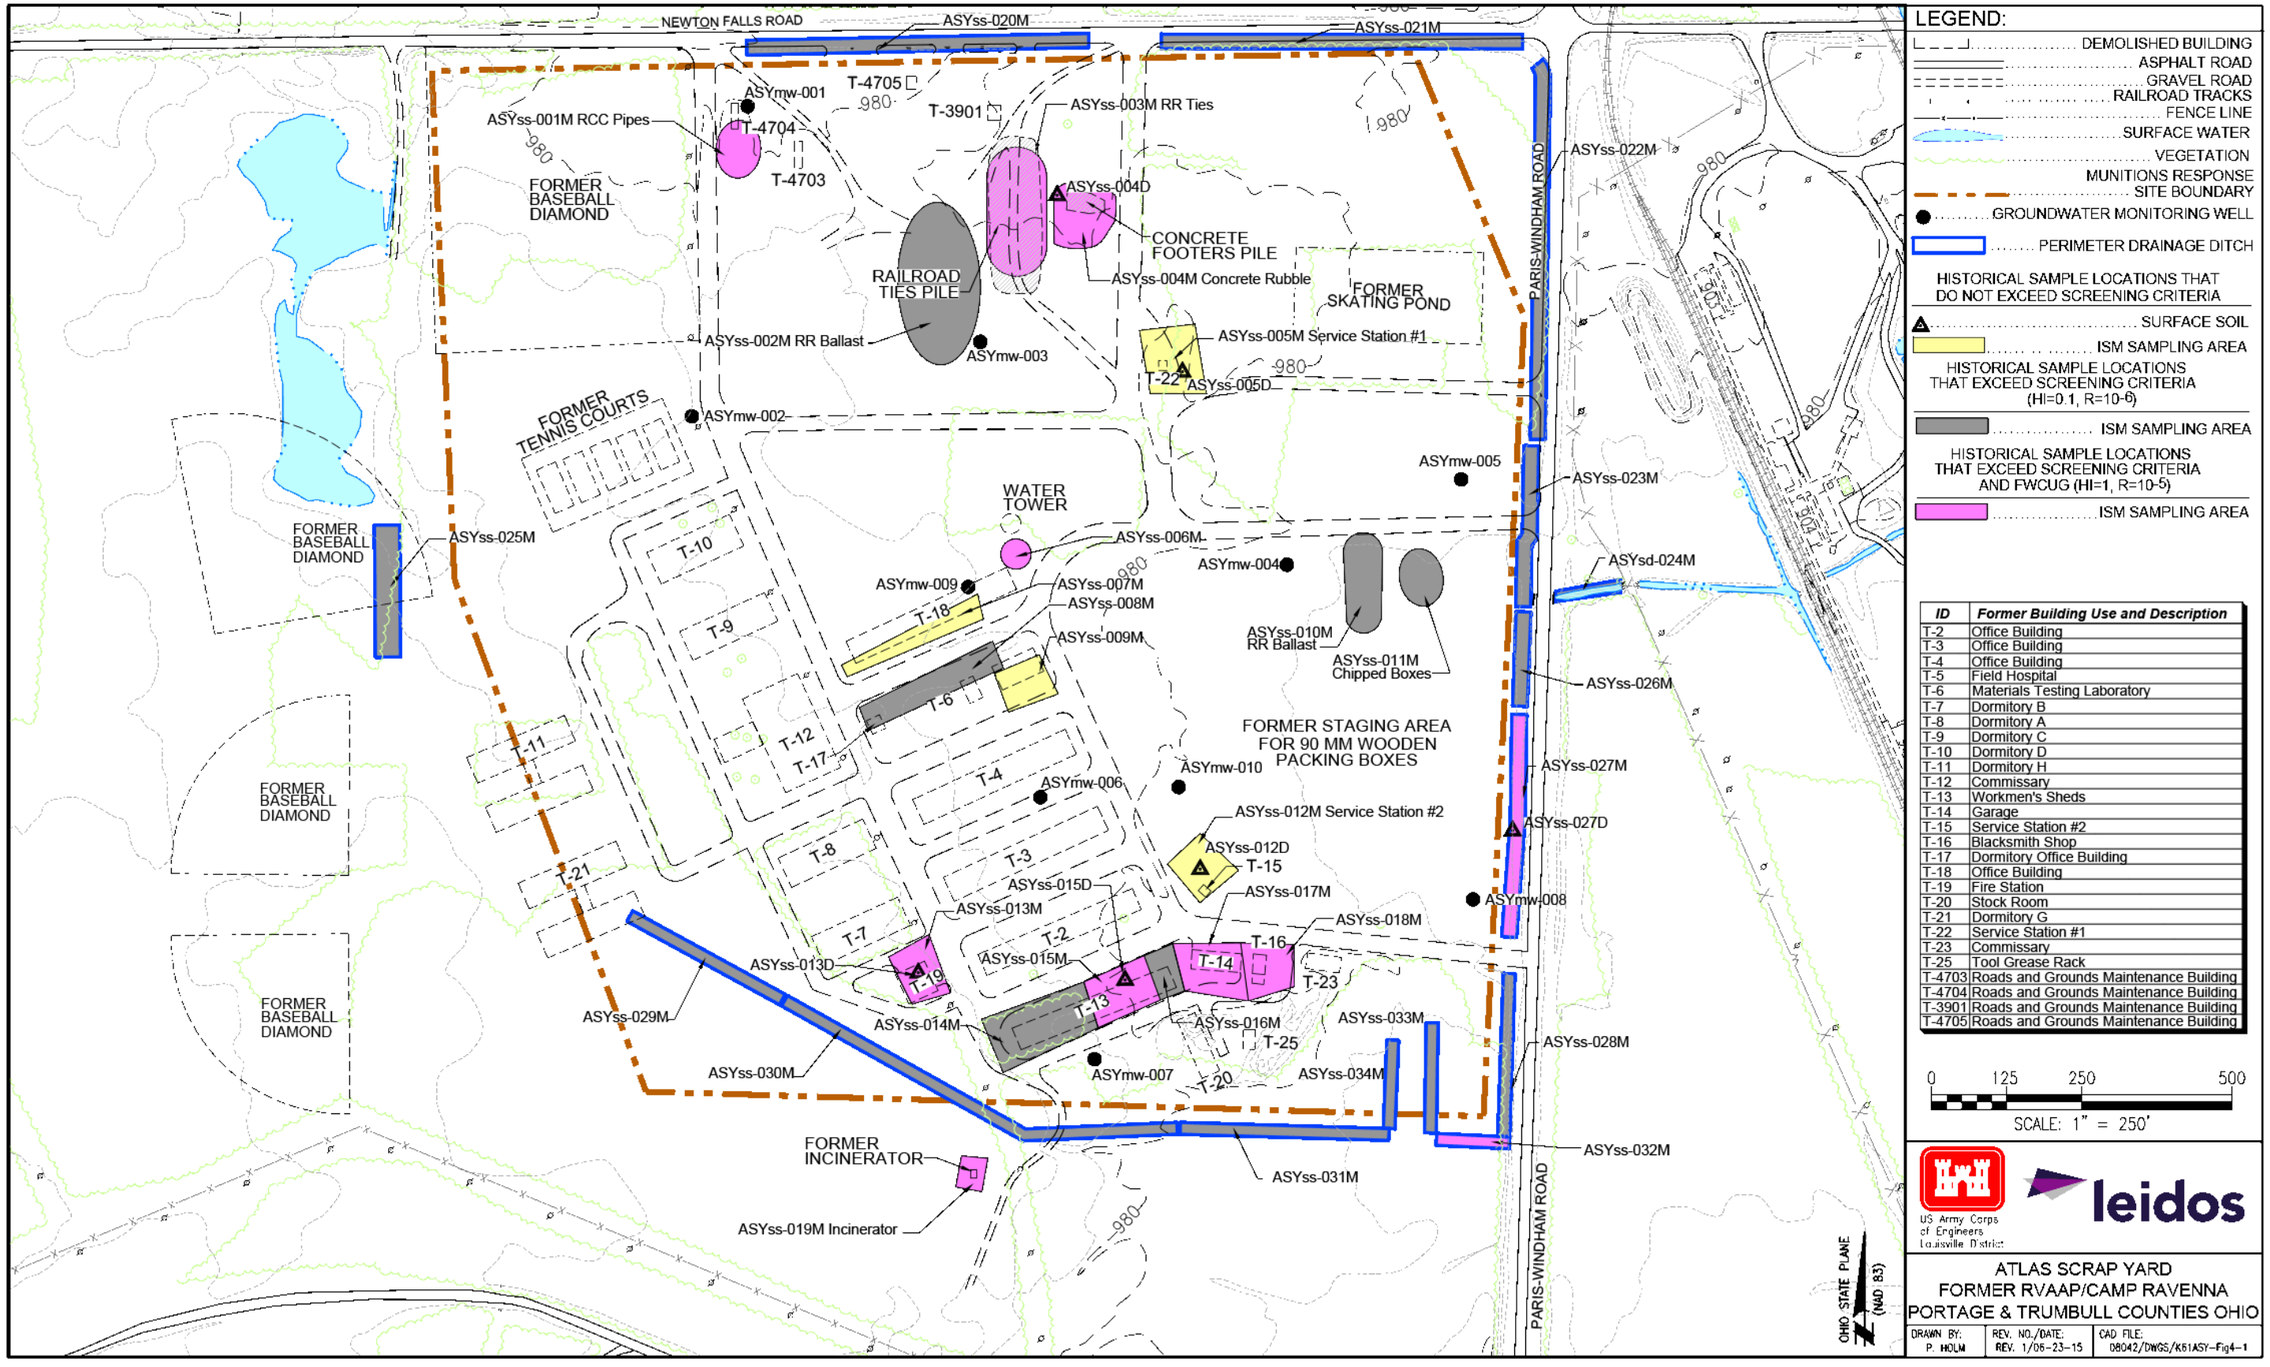

ID	Former Building Use and Description
T-2	Office Building
T-3	Office Building
T-4	Office Building
T-5	Field Hospital
T-6	Materials Testing Laboratory
T-7	Dormitory B
T-8	Dormitory A
T-9	Dormitory C
T-10	Dormitory D
T-11	Dormitory H
T-12	Commissary
T-13	Workmen's Sheds
T-14	Garage
T-15	Service Station #2
T-16	Blacksmith Shop
T-17	Dormitory Office Building
T-18	Office Building
T-19	Fire Station
T-20	Stock Room
T-21	Dormitory G
T-22	Service Station #1
T-23	Commissary
T-25	Tool Grease Rack
T-4703	Roads and Grounds Maintenance Building
T-4704	Roads and Grounds Maintenance Building
T-3901	Roads and Grounds Maintenance Building
T-4705	Roads and Grounds Maintenance Building

Figure 4–1. Characterization of 14 AOCs Sampling Locations

THIS PAGE INTENTIONALLY LEFT BLANK.

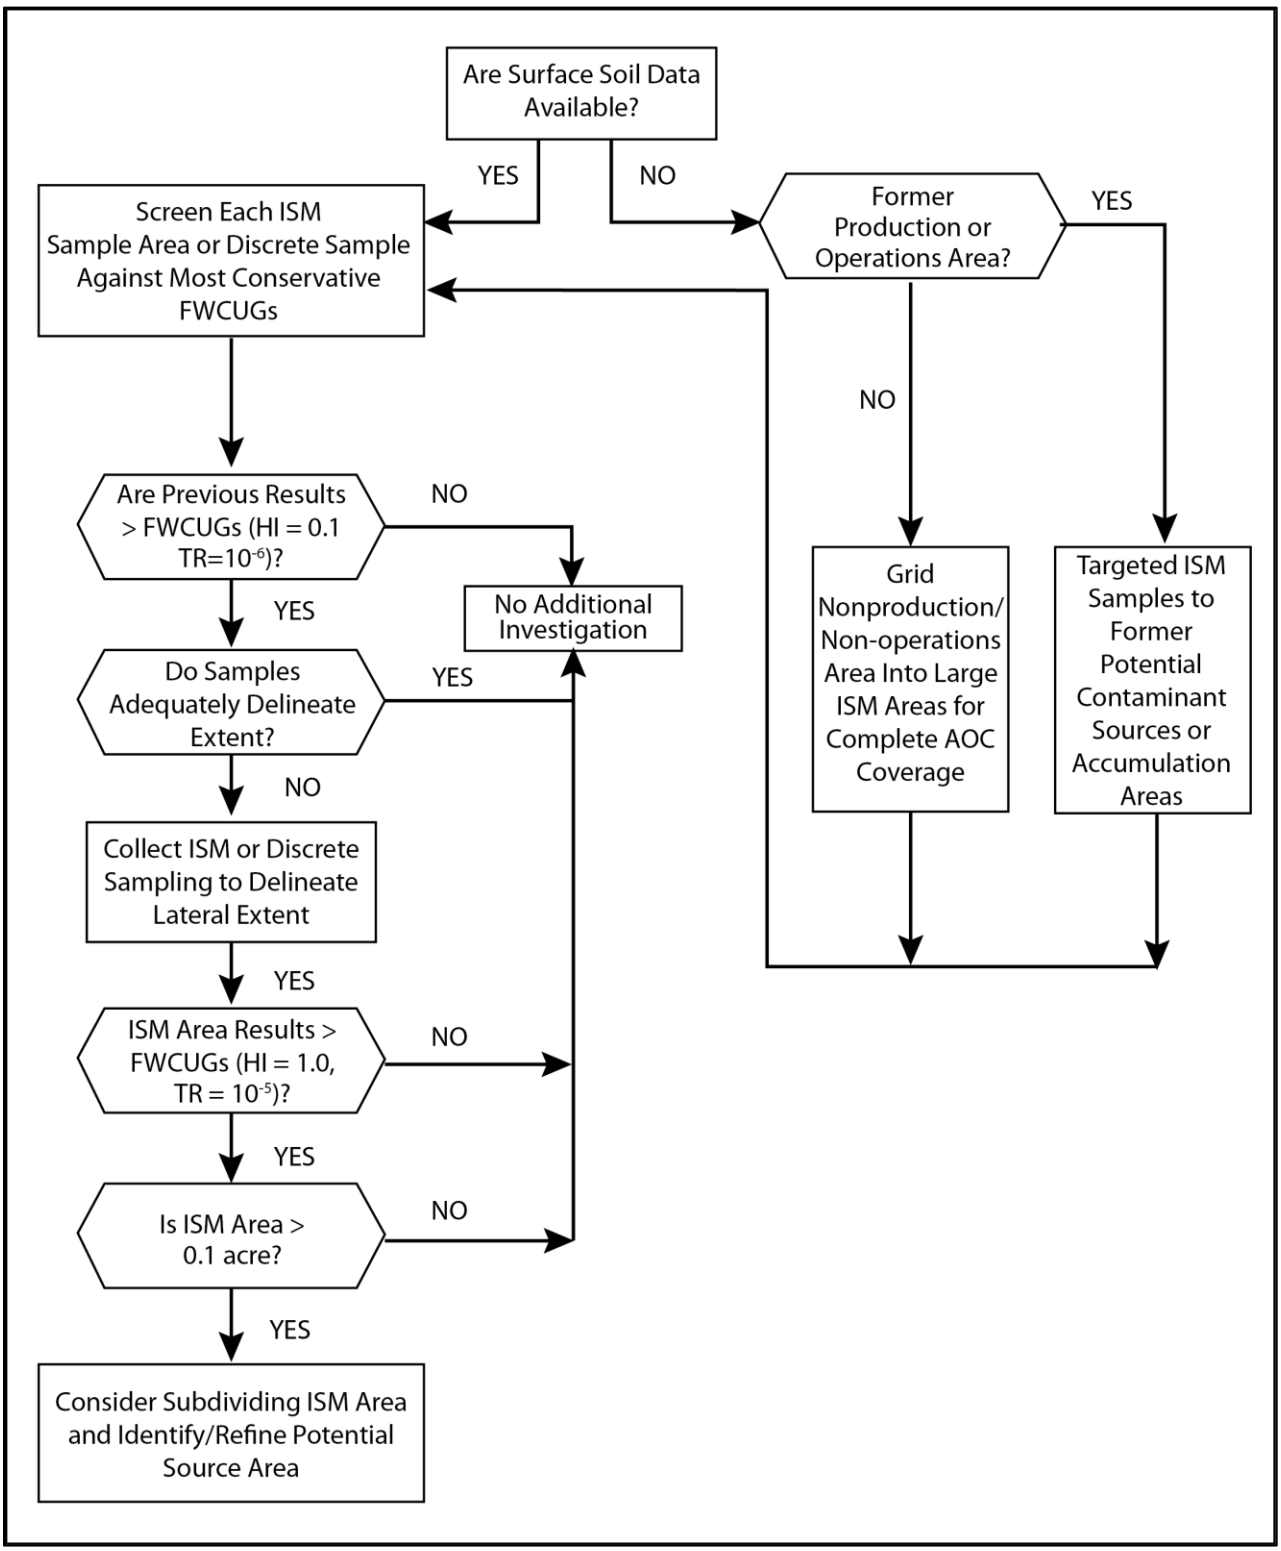


Figure 4–2. PBA08 RI Surface Soil Sampling


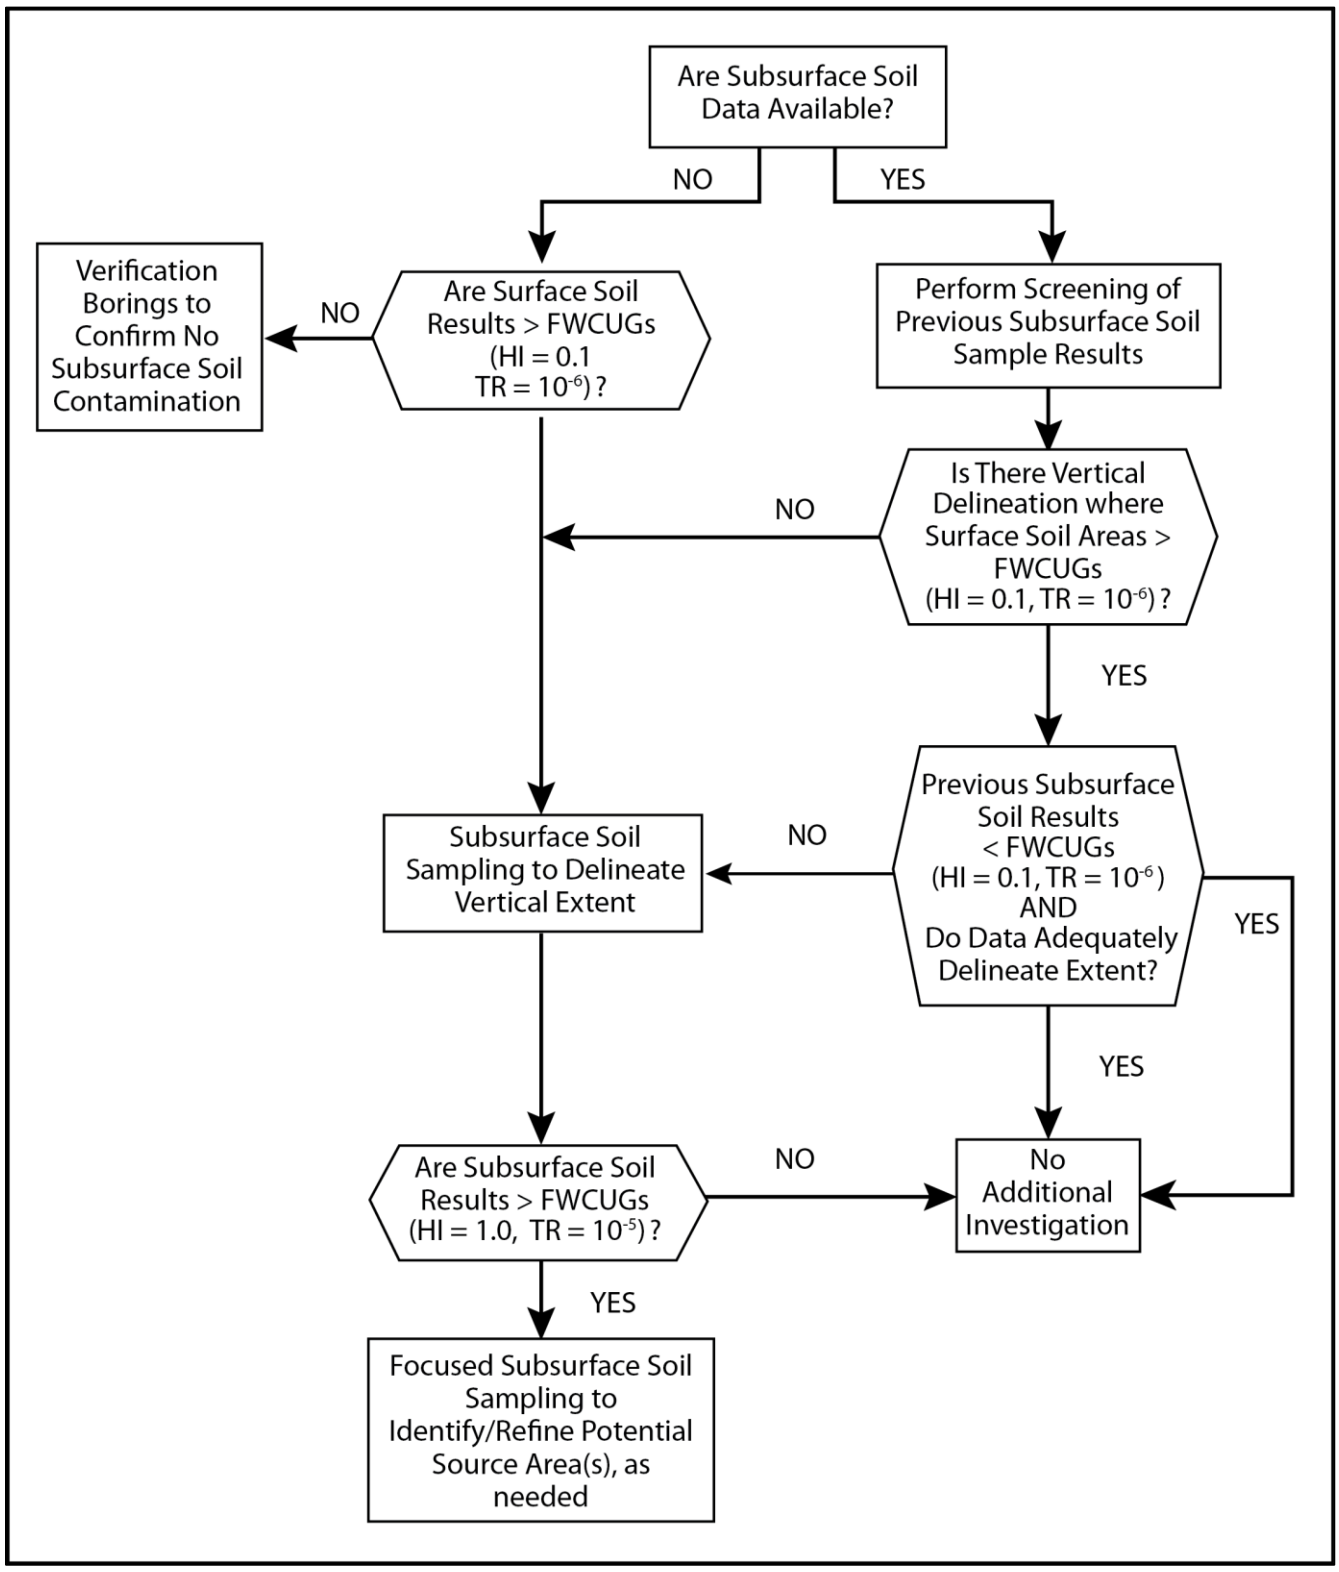


Figure 4–3. PBA08 RI Subsurface Soil Sampling Decision Flowchart

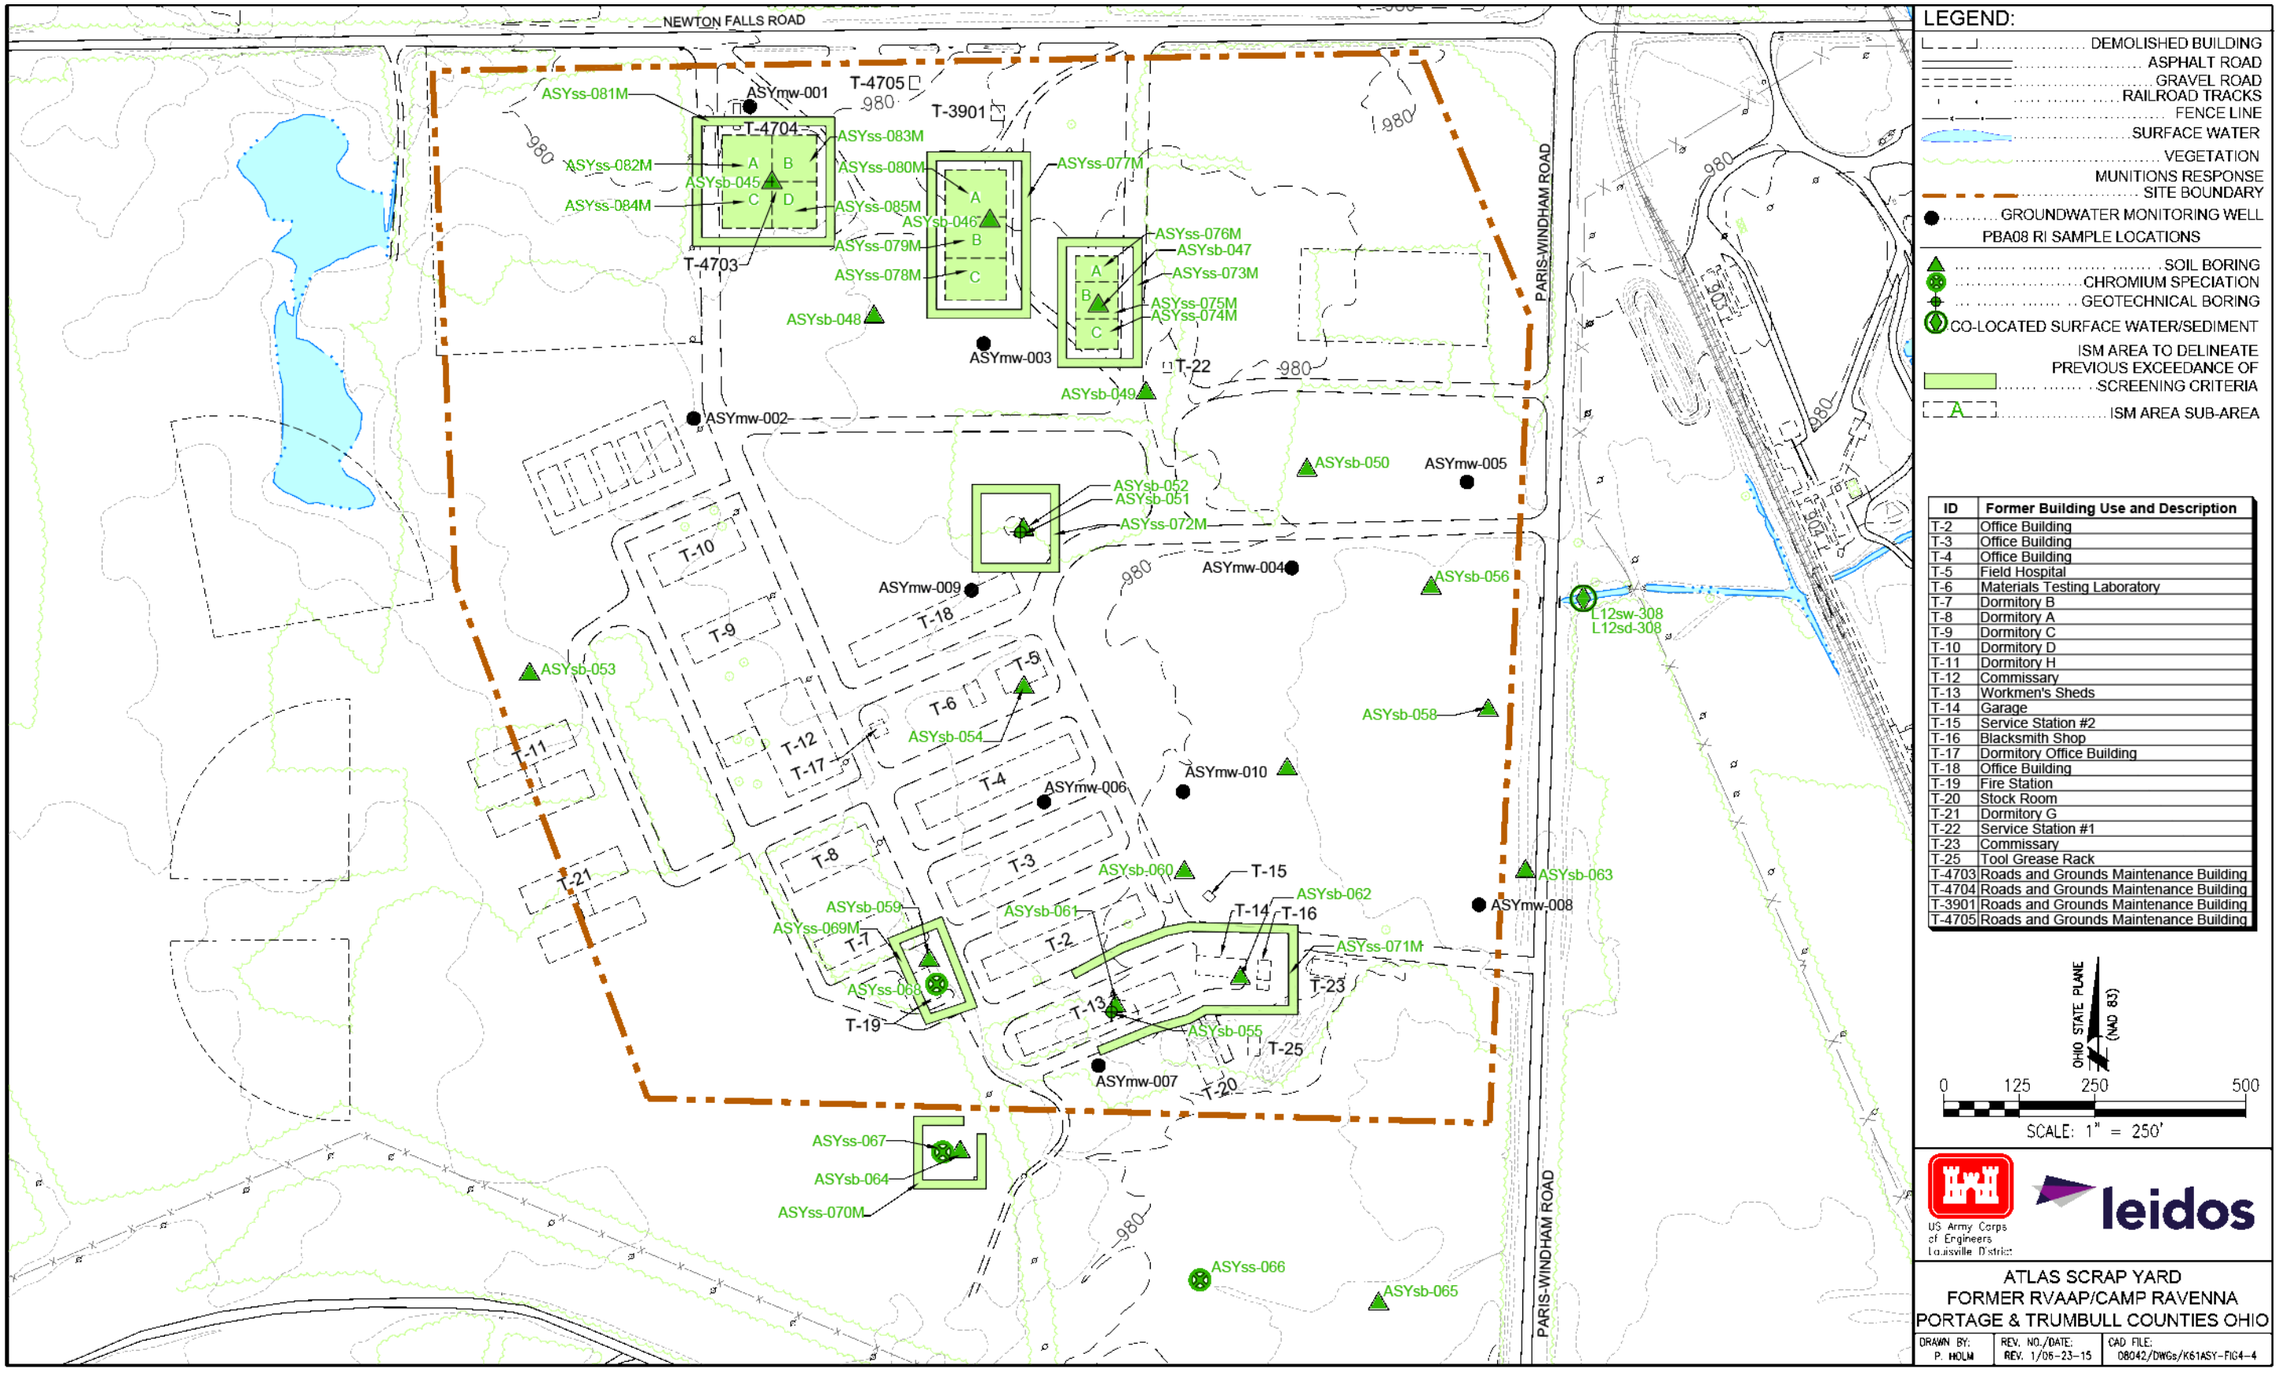

ID	Former Building Use and Description
T-2	Office Building
T-3	Office Building
T-4	Office Building
T-5	Field Hospital
T-6	Materials Testing Laboratory
T-7	Dormitory B
T-8	Dormitory A
T-9	Dormitory C
T-10	Dormitory D
T-11	Dormitory H
T-12	Commissary
T-13	Workmen's Sheds
T-14	Garage
T-15	Service Station #2
T-16	Blacksmith Shop
T-17	Dormitory Office Building
T-18	Office Building
T-19	Fire Station
T-20	Stock Room
T-21	Dormitory G
T-22	Service Station #1
T-23	Commissary
T-25	Tool Grease Rack
T-4703	Roads and Grounds Maintenance Building
T-4704	Roads and Grounds Maintenance Building
T-3901	Roads and Grounds Maintenance Building
T-4705	Roads and Grounds Maintenance Building

Figure 4–4. PBA08 RI – April 2010 Source Area Sampling Locations



Figure 4–5. PBA08 RI – April 2010 Large ISM Sampling Locations

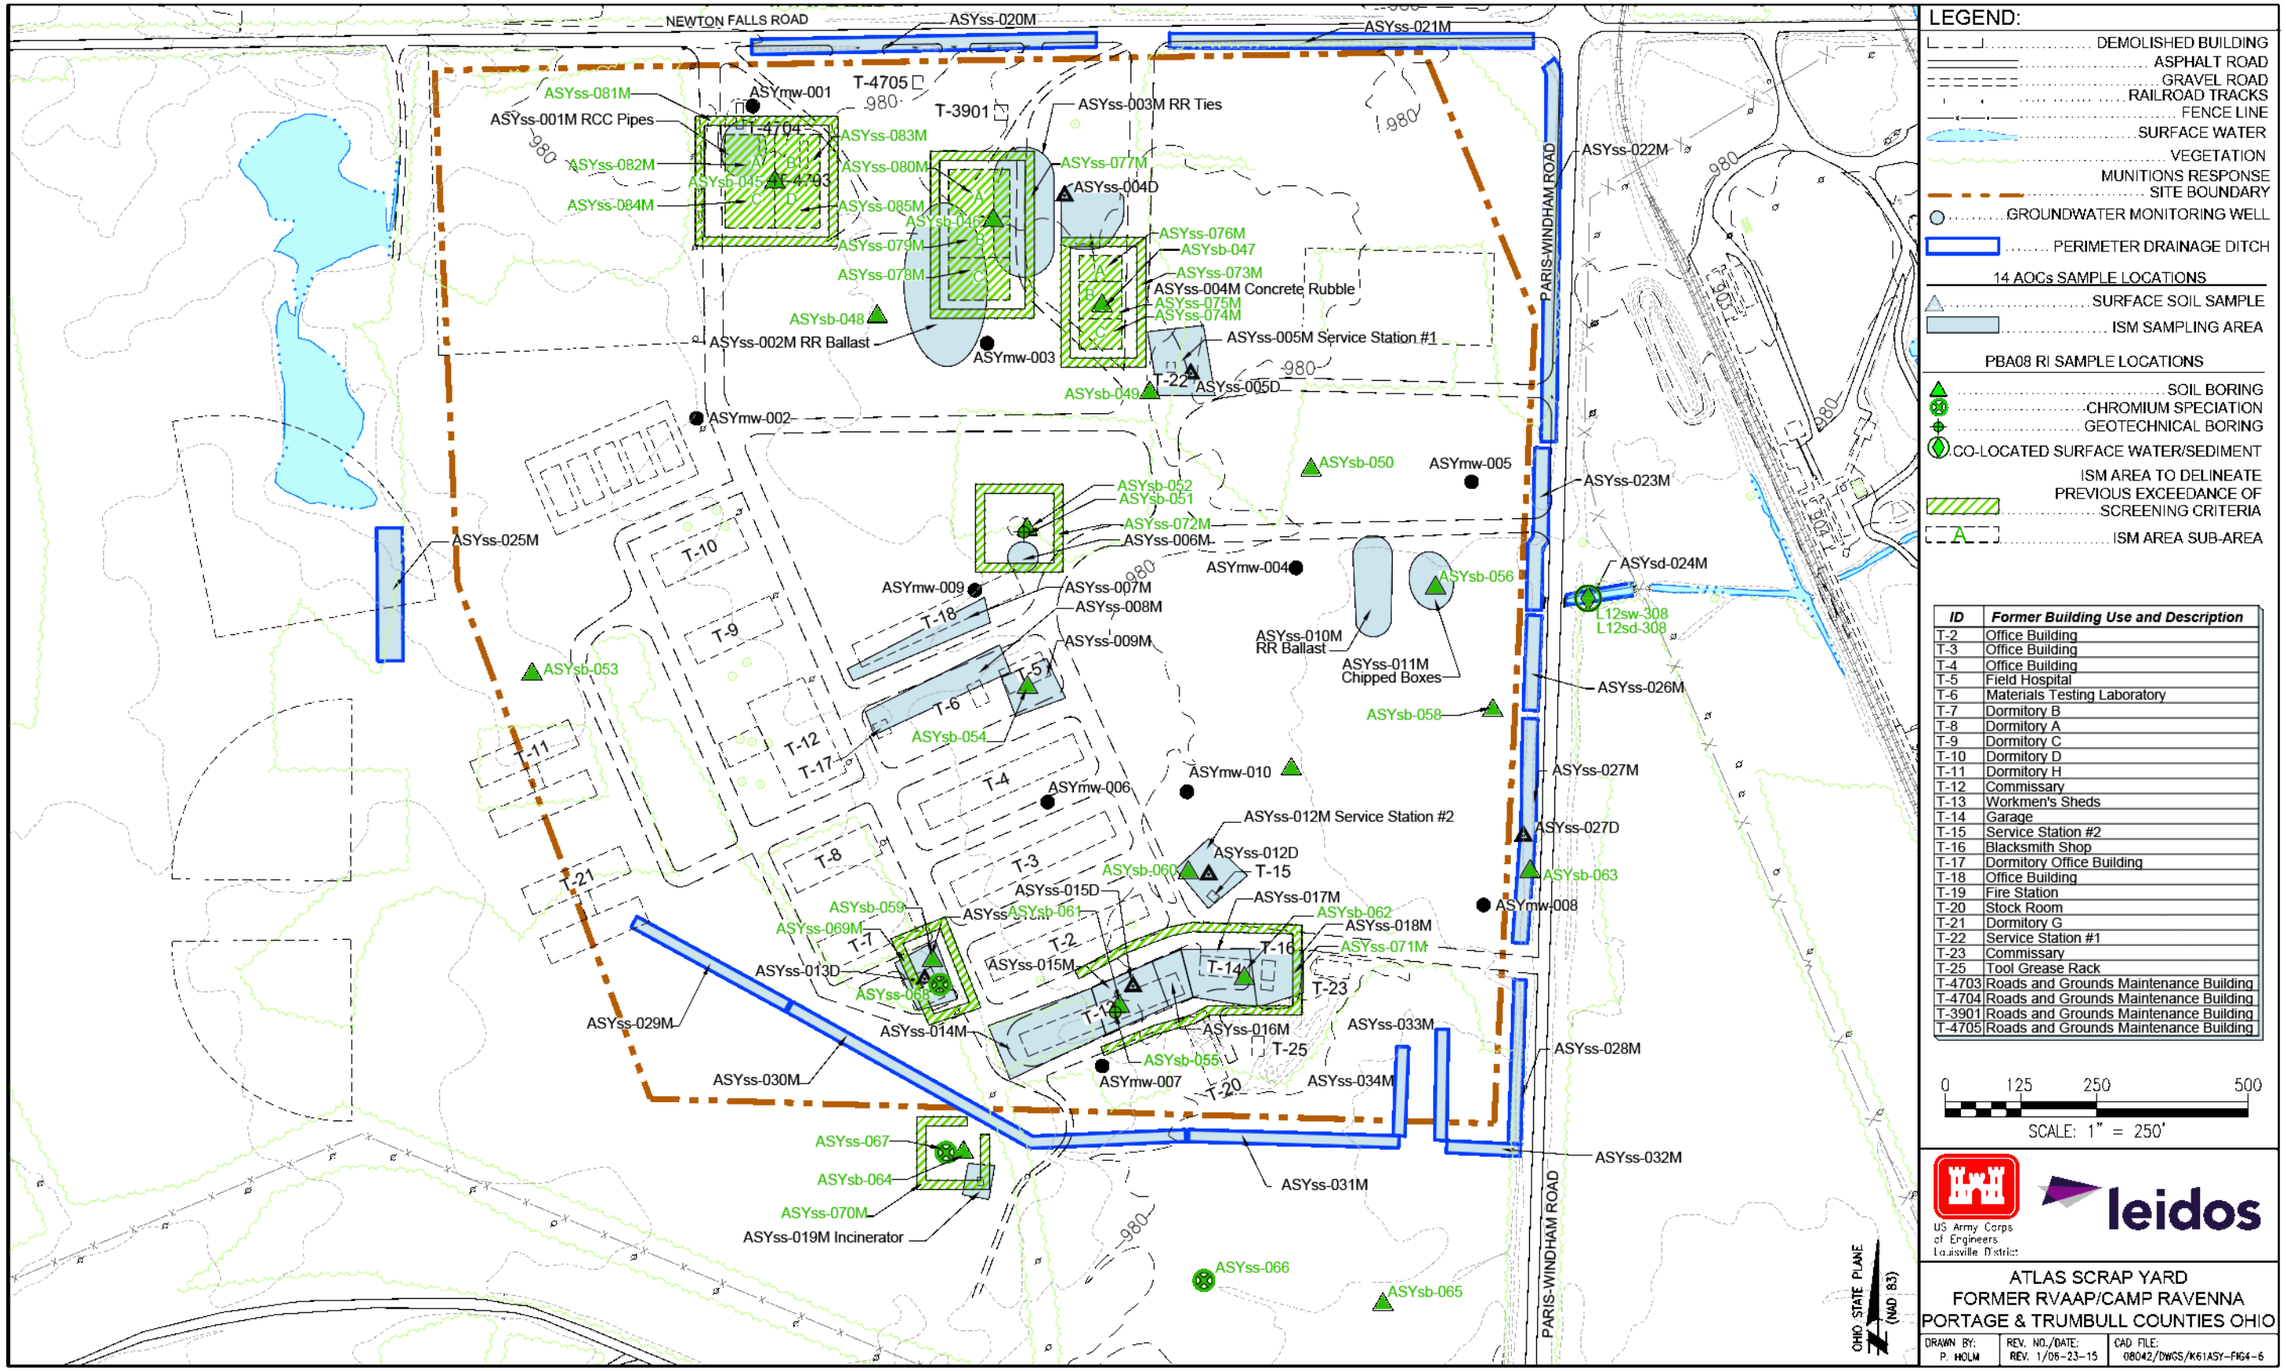


Figure 4–6. Characterization of 14 AOCs and PBA08 RI – April 2010 Source Area Sampling Locations

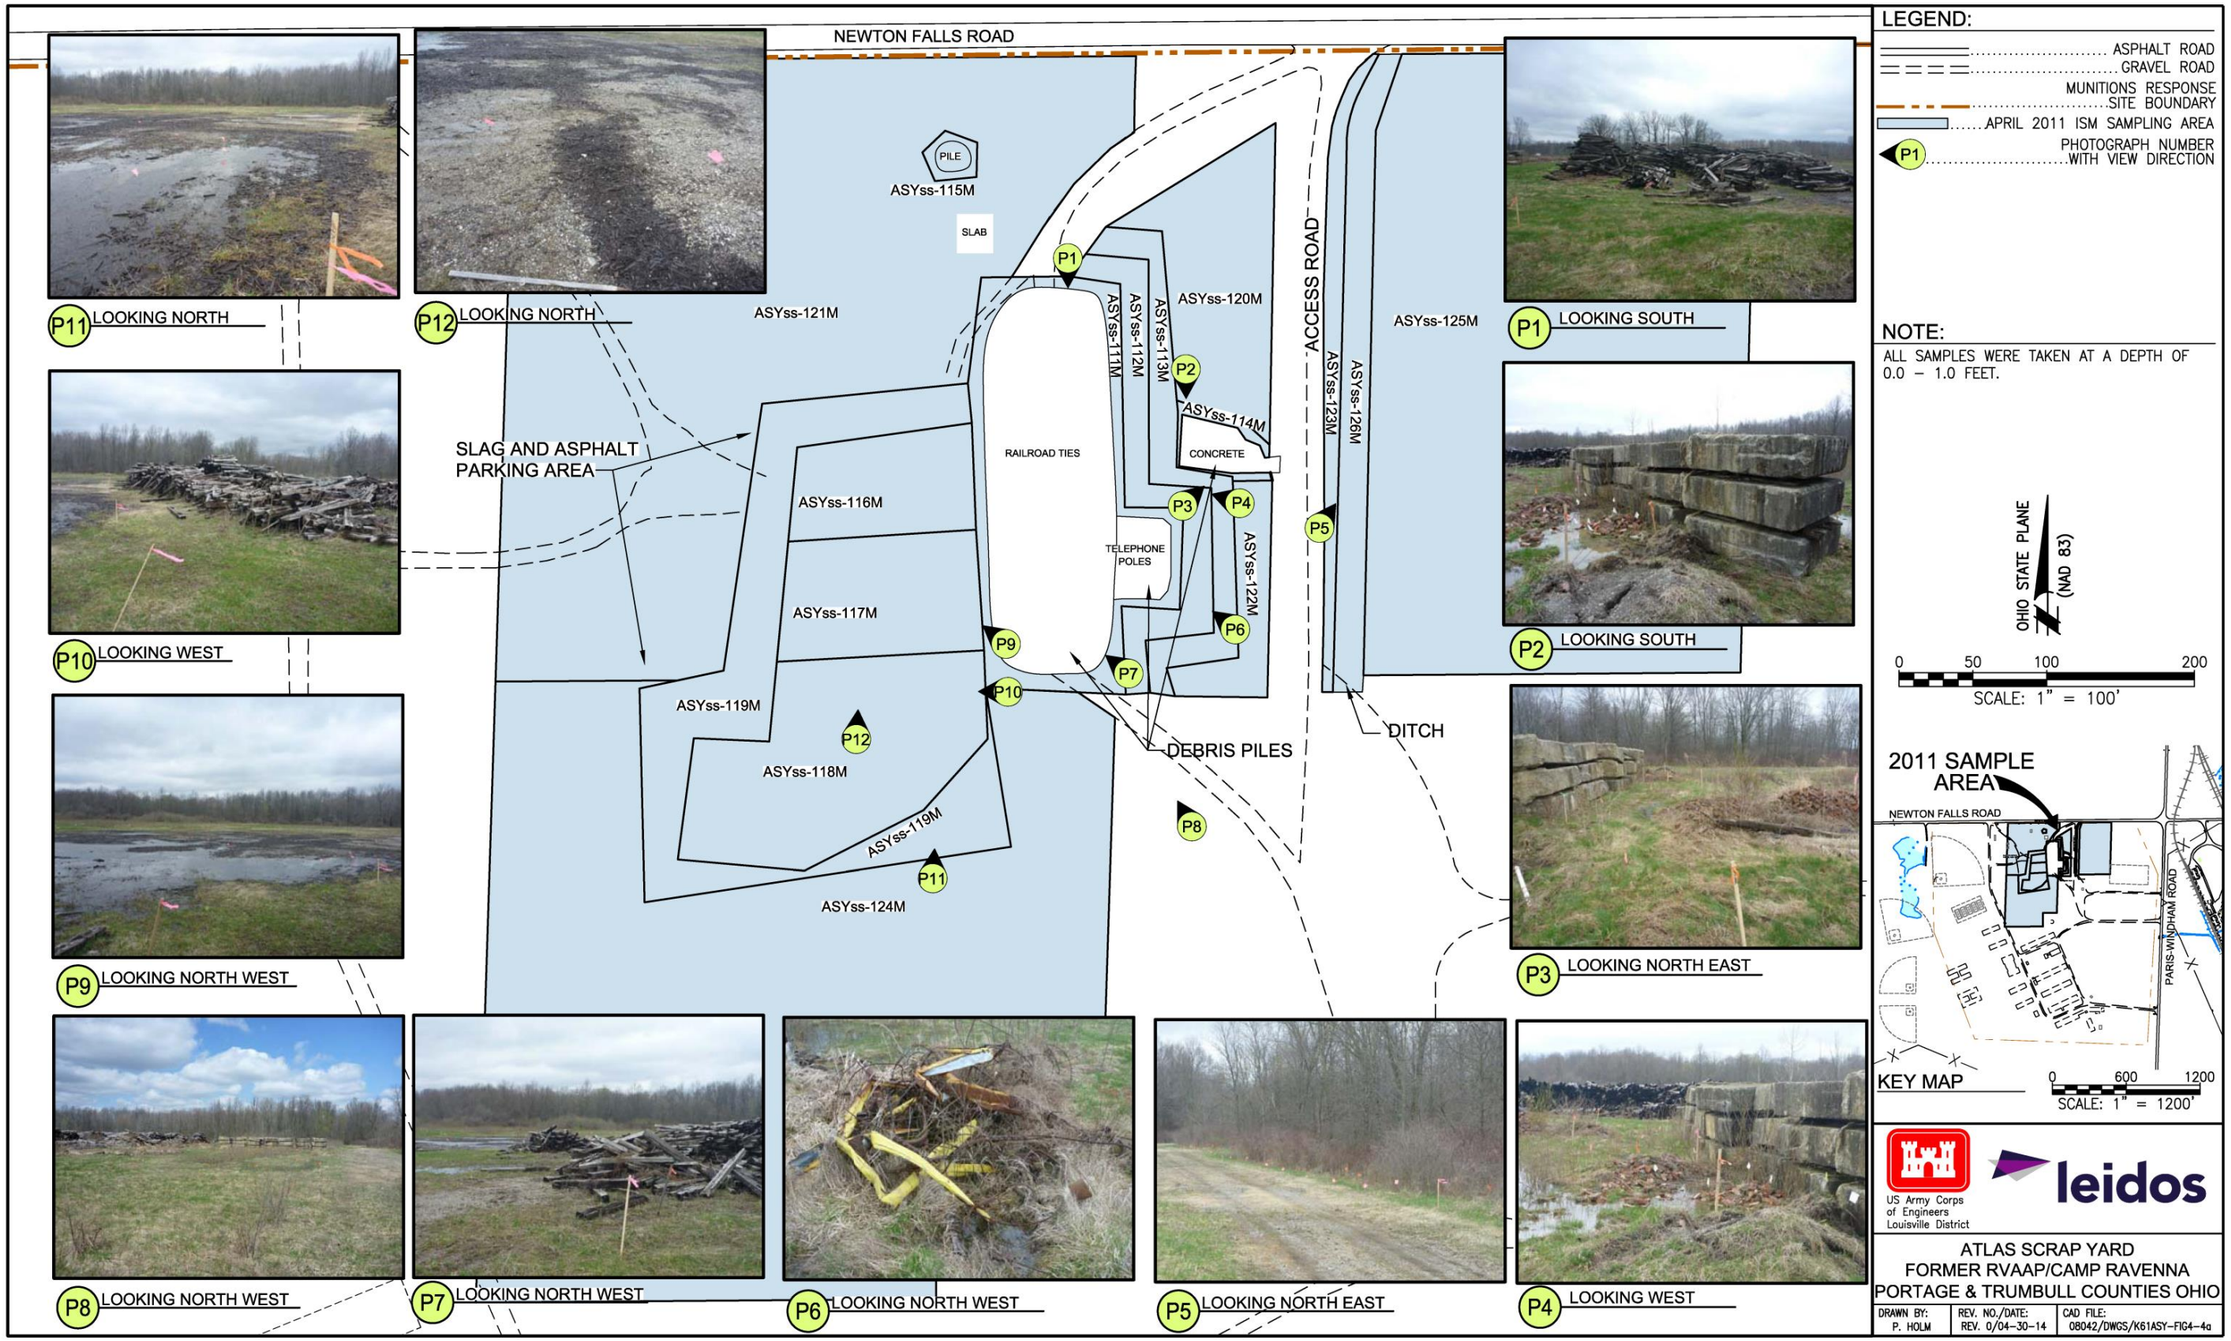


Figure 4–7. PBA08 RI – April 2011 Soil Sampling Locations (Active Storage Area)

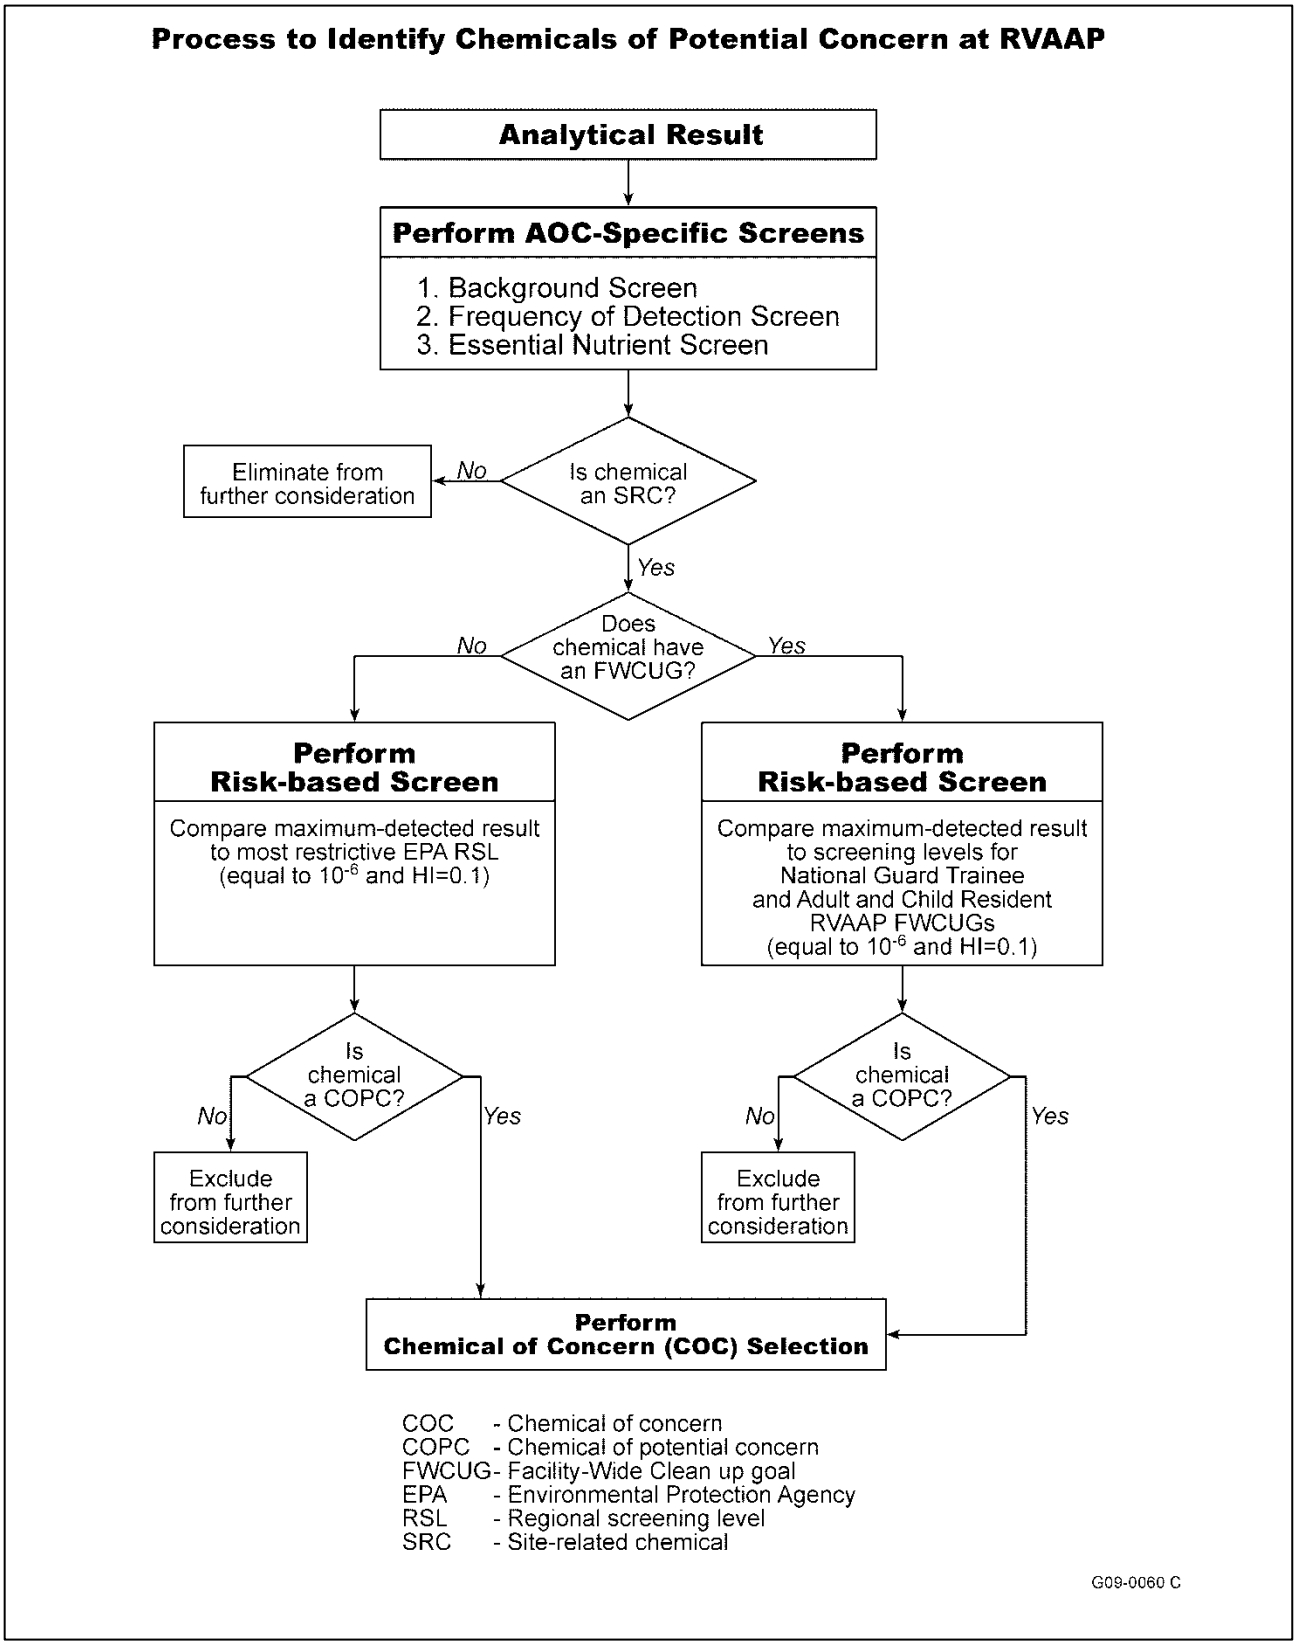


Figure 4–8. Process to Identify RVAAP COPCs in the Human Health Risk Assessment (USACE 2010a)

THIS PAGE INTENTIONALLY LEFT BLANK.

5.0 NATURE AND EXTENT OF CONTAMINATION

This section presents analytical data results obtained during the PBA08 RI and Characterization of 14 AOCs investigation, and the evaluation of nature and extent of SRCs in environmental media at Atlas Scrap Yard. All validated Atlas Scrap Yard data from historical investigations (i.e., Characterization of 14 AOCs) and the PBA08 RI are included in Appendix D. Complete laboratory analytical data packages from the PBA08 RI are also included in Appendix D. Contaminant nature and extent is presented below for each medium and class of analytes.

5.1 SURFACE SOIL DISCRETE SAMPLE RESULTS FOR CHROMIUM SPECIATION

During the PBA08 RI, surface soil samples were collected from three discrete sample locations and analyzed for hexavalent chromium and total chromium. Two samples were collected from areas previously identified during the Characterization of 14 AOCs as having elevated total chromium concentrations (ASYss-019M and ASYss-013M), and one sample was collected from an area previously identified as having a total chromium concentration near background concentrations (ASYss-031M). This sampling determined the contribution of hexavalent chromium to total chromium in soil at Atlas Scrap Yard for use in the HHRA (Section 7.2). Chromium speciation results are shown in Table 5-1. All three samples had a total chromium concentration below the BSV of 17.4 mg/kg. A detailed assessment of the speciation results is presented in Section 7.2.4.1.

5.2 CONTAMINANT NATURE AND EXTENT IN SURFACE SOIL

Data from all eligible historical and PBA08 RI surface soil ISM samples were combined and screened, as discussed in Section 4.4, to identify SRCs representing current conditions at Atlas Scrap Yard. Table 4-20 presents the results of the SRC screening for ISM surface soil at the AOC. The surface soil aggregate SRC screening dataset included 33 ISM samples collected in 2004 under the Characterization of 14 AOCs (which excludes sediment sample ASYsd-024M), 35 ISM samples collected in 2010 during the PBA08 RI, and an additional 16 ISM samples collected in 2011 under a subsequent PBA08 RI sampling event. The following subsections discuss the concentration and distribution of ISM surface soil results.

All 2010 PBA08 RI ISM samples were analyzed for TAL metals, explosives, and PAHs; five samples were analyzed for RVAAP full-suite analytes (TAL metals, explosives, propellants, SVOCs, VOCs, PCBs, and pesticides). All 2011 PBA08 RI ISM samples were analyzed for TAL metals and PAHs. Tables 4-12 and 4-13 present the results for all detected analytes in the surface soil samples collected during the PBA08 RI using ISM and discrete methods, respectively.

Figures 5-1 through 5-10 illustrate the distribution and concentrations of inorganic and organic SRCs that occur at each surface soil sample location, which include discrete and ISM samples. Due to the number of surface soil samples, the AOC was subdivided into multiple views (i.e., northern, central, and southern portions) in the figures for clarity of data presentation. In addition, the samples collected in April 2011 at the ASA are presented separately on Figures 5-9 and 5-10. To illustrate the extent and magnitude of contaminants on Figures 5-1 through 5-10, those SRCs that exceeded the most

restrictive FWCUGs at a TR of 10^{-5} and a HI=1.0 (or background concentrations) are highlighted yellow.

5.2.1 Explosives and Propellants

Eight explosives and one propellant (nitrocellulose) were identified as SRCs, as there are no associated background concentrations for these chemicals. The distribution of explosives and propellants in Atlas Scrap Yard surface soil is shown in Figures 5-4 through 5-6. Explosive and propellant SRCs for the grid ISM areas are shown in Figure 5-8. Explosive detections at Atlas Scrap Yard were limited in frequency. Of the eight explosives identified as SRCs, DNT exhibited the highest detection frequency at 6 out of 65 samples in the screening dataset. The greatest number of explosive detections generally occurred in the center of the ASA immediately south of the eastern entrance on Newton Falls Road.

Four explosives were detected in PBA08 RI locations near the RR piles (ASYss-080M) and in the large ISM grid (ASYss-093M). Explosives were not detected in the sample (ASYss-008M) proximate to Building T-19 – Materials Testing Laboratory or sample (ASYss-011M) proximate to the former staging area of 90mm wooden packing boxes. Nitrocellulose was detected in five of the six surface soil samples with three detects in the ASA, including the maximum concentration observed in grid ISM location ASYss-088M.

5.2.2 Inorganic Chemicals

Sixteen inorganic chemicals were identified as SRCs in surface soil. Inorganic chemical concentrations detected above background concentrations were observed in surface soil throughout Atlas Scrap Yard, and all 81 samples used in the SRC surface soil screening dataset exhibited multiple inorganic chemicals above background concentrations. Due to the ubiquity of detections above background concentrations, no apparent spatial trend is evident in the distribution of inorganic chemicals throughout the AOC. A total of 11 of the 16 inorganic chemicals identified as SRCs were detected in all 81 surface soil samples in the SRC dataset (aluminum, arsenic, barium, beryllium, chromium, cobalt, copper, lead, manganese, nickel, and zinc).

The highest number of inorganic SRCs detected at their maximum concentration (cadmium, chromium, lead, mercury, and zinc) were observed at a historical sample location by the former incinerator (ASYss-019M), located at the southern portion of Atlas Scrap Yard. ASYss-019M had a lead concentration of 1,200 mg/kg, which had a co-located PBA08 RI sample ASYss-070M that had a lead concentration of 312J mg/kg. None of the inorganic SRCs were detected at their maximum concentrations at the grid ISM locations. Observations regarding select individual inorganic SRCs in Atlas Scrap Yard surface soil are presented below:

- Barium was detected above its screening level (88.4 mg/kg) in 58 samples, with an MDC of 325 mg/kg detected at PBA08 RI sample locations by the railroad ties (ASYss-079M) and by the Reinforced Concrete Culvert (RCC) Pipes (ASYss-084M).

- Cadmium was detected above its screening level (0 mg/kg) in 74 samples, with an MDC of 9.5 mg/kg detected at historical sample location ASYss-019M located in the vicinity of the former incinerator.
- Chromium was detected above its screening level (17.4 mg/kg) in 61 samples, with an MDC of 64 mg/kg observed at historical sample location ASYss-019M located in the vicinity of the former incinerator.
- Lead was detected above its screening level (26.1 mg/kg) in 28 samples, with an MDC of 1200 mg/kg observed at historical sample location ASYss-019M located in the vicinity of the former incinerator.
- Mercury was detected above its background concentration of 0.036 mg/kg in 56 samples, with a maximum detection of 0.64 mg/kg at historical sample location ASYss-019M located in the vicinity of the former incinerator.
- Silver was detected above its screening level (0 mg/kg) in 46 samples, with a maximum detection of 5.2 mg/kg observed at historical sample location by former Building T-16 (ASYss-018M).
- Thallium was detected above its screening level (0 mg/kg) in 53 samples, with a maximum detection for the SRC screening dataset of 0.35 mg/kg at historical sample location ASYss-018M.
- Zinc was detected above its background concentration of 61.8 mg/kg in 42 samples, with a maximum detection of 1,800 mg/kg observed at historical sample location ASYss-019M located in the vicinity of the former incinerator.

The distribution of inorganic SRCs is presented in Figures 5-1 through 5-3, 5-7 (grid ISM areas), and 5-10 for samples collected in April 2011 at the ASA.

5.2.3 Semi-volatile Organic Compounds

A total of 26 SVOCs were identified as SRCs in surface soil, 16 of which were PAHs. All detected concentrations were retained as SRCs since no site-specific background values exist for SVOCs. Since there are no background values for screening SVOCs, those SRCs that exceeded the most restrictive FWCUGs at a TR of 10^{-5} and HI=1.0 are highlighted yellow in Figures 5-4 through 5-6, 5-8 (grid ISM areas), and 5-10 for samples collected in April 2011 at the ASA to illustrate the distribution of SVOCs. Detections of PAH SRCs were widespread throughout the AOC, with the lowest frequency of detection noted at 46 of 54 samples for acenaphthene. A total of 10 of the 16 PAHs [benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(ghi)perylene, benzo(k)fluoranthene, chrysene, fluoranthene, indeno(1,2,3-cd)pyrene, phenanthrene, and pyrene] were detected in all 54 samples in the SRC screening dataset.

Although SVOCs are widely distributed in surface soil, the highest concentrations of SRCs were observed in the ASA. A total of 14 of the 16 PAH SRCs were detected at their maximum concentrations at ISM location ASYss-126M. This sample was collected in April 2011 to characterize the ditch paralleling the access road in the ASA and was located within grid ISM location ASYss-093M collected in April 2010. The next highest concentrations of PAHs from the April 2011 sampling event were from the parking areas made up of slag and asphalt gravel immediately to the

west of the railroad tie pile (locations ASYss-116M, ASYss-117M, ASYss-118M, and ASYss-119M). Another four SRCs (2-methylnaphthalene, carbazole, dibenzofuran, and naphthalene) were also detected in parking area at their maximum concentrations at ASYss-088M collected in April 2010.

5.2.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls

One VOC (acetone) and one PCB (PCB-1260) were identified as SRCs in surface soil, as there are no associated background concentrations for these chemicals. Acetone was detected only at historical location in a perimeter ditch (ASYss-027D) at a concentration of 0.022 mg/kg. PCB-1260 was detected in two surface soil samples in the SRC screening dataset at PBA08 RI locations near the Concrete Rubble at ASYss-074M (0.019J mg/kg) and ASYss-076M (0.17 J mg/kg). PCB-1260 was detected in historical sample ASYss-004M at 0.054 mg/kg; however this location was not included in the SRC dataset because it was re-sampled under the PBA08 RI. All VOCs analyses, including carbon tetrachloride, for the sample (ASYss-013M) associated with Building T-19 Fire Station had nondetectable concentrations. The distribution of the detected VOCs and PCBs in surface soil is presented in Figures 5-4 through 5-6. PCBs were not analyzed from soil at the sample location (ASYss-001M) associated with Building T-4704 – Road and Grounds Maintenance Building. Grid ISM surface soil samples are presented in Figure 5-8. No pesticides were detected during the PBA08 RI.

5.3 CONTAMINANT NATURE AND EXTENT IN SUBSURFACE SOIL

Data from subsurface soil samples were screened, as discussed in Section 4.4, to identify SRCs representing subsurface conditions at Atlas Scrap Yard. Since subsurface soil samples were not collected during the historical investigations at the AOC, the SRC screening dataset was comprised of 42 discrete samples collected during the PBA08 RI activities. All 1–4 ft bgs and 4–7 ft bgs subsurface samples were analyzed for TAL metals, explosives, and PAHs; seven samples were analyzed for RVAAP full-suite analytes (TAL metals, explosives, propellants, SVOCs, VOCs, PCBs, pesticides). There were no exceedances of preliminary screening criteria in the 4–7 ft bgs samples, and the vertical nature and extent of contamination was delineated at that interval. In accordance with the DQOs of the PBA08 SAP, no 7–13 ft bgs samples were analyzed for purposes of evaluating nature and extent. Table 4-21 presents the results of the SRC screening for subsurface soil samples at Atlas Scrap Yard.

Table 4-14 summarizes the analytical results for all detected analytes in the PBA08 RI subsurface soil samples at Atlas Scrap Yard. Complete copies of the laboratory analytical packages are presented in Appendix D. Figures 5-11 through 5-13 illustrate the distribution of inorganic and organic SRCs in subsurface soil.

5.3.1 Explosives and Propellants

Two explosives [3-nitrotoluene and octahydro-1,3,5,7-tetranitroi-1,3,5,7-tetrazocane (HMX)] and one propellant (nitrocellulose) were identified as SRCs for subsurface soil. All detected concentrations of

these explosive SRCs in subsurface soil samples were less than the laboratory reporting limit. The explosive 3-nitrotoluene was detected in the 1–4 ft bgs interval at a sample location near the Building T-13 Workmen's Sheds (ASYsb-061) at a concentration of 0.021J mg/kg but was not observed in the 4–7 ft bgs interval. HMX was detected at a concentration of 0.014J mg/kg in the 1–4 ft bgs interval only at soil boring location within a Perimeter Ditch (ASYsb-063). Nitrocellulose was detected at a concentration of 2J mg/kg in the 1–4 ft bgs interval at location ASYsb-046 but was not detected in the underlying 4–7 ft bgs interval. The locations of explosives and propellants in subsurface soil are shown in Figures 5-11 through 5-13.

5.3.2 Inorganic Chemicals

Seven inorganic chemicals were identified as SRCs in subsurface soil: arsenic, beryllium, cadmium, cobalt, lead, selenium, and silver. The distribution of inorganic SRCs in subsurface soil is presented in Figures 5-11 through 5-13. Those SRCs that exceeded the most restrictive FWCUGs at a TR of 10^{-5} and HI=1.0 (or background concentrations) are highlighted yellow on the figures.

Cadmium and silver were observed above screening criteria (0 mg/kg) in 39 and 21 out of 41 samples, respectively. The remaining inorganic SRCs were detected above their respective screening criteria only sporadically. The inorganic chemical with the next highest frequency of detection above screening criteria was selenium, which was detected above its background concentration of 1.5 mg/kg in 5 of the 41 samples collected with a maximum of 1.8 mg/kg observed at ASYsb-058 in the 1–4 ft bgs interval. Three of the seven inorganic SRCs were detected at their maximum concentrations in the 1–4 ft bgs interval at ASYsb-059: arsenic (25.2 mg/kg versus the screening criteria of 19.8 mg/kg), beryllium (1.2 mg/kg versus the screening criteria of 0.88 mg/kg), and cobalt (33.7 mg/kg versus the screening criteria of 23.2 mg/kg). Lead was only detected above background (19.1 mg/kg) at ASYsb-064 (33 mg/kg) located in the vicinity of the former incinerator. This concentration is significantly below the Resident Receptor cleanup goal of 400 mg/kg.

All inorganic SRCs identified for subsurface soil were also identified as SRCs for surface soil. No apparent trends of increasing or decreasing concentrations with depth were observed with the inorganic SRCs.

5.3.3 Semi-volatile Organic Compounds

Seventeen SVOCs were identified as SRCs in subsurface soil. The distribution of SVOCs in subsurface soil is shown in Figures 5-11 through 5-13. A total of 16 of the 17 SVOCs were PAHs except bis(2-ethylhexyl)phthalate. SVOCs were detected in a maximum of 4 of 42 samples in the SRC screening dataset.

The samples with the greatest number and highest concentrations of PAH SRCs were in Perimeter Ditches. The sample with the greatest number and highest concentrations of PAH SRCs was the 1–4 ft bgs interval at location ASYsb-063. All 16 PAH SRCs were detected at ASYsb-063, with 15 observed at their maximum concentrations in the 1–4 ft bgs sample. Seven PAHs were detected in the 4–7 ft bgs interval at ASYsb-063 at concentrations typically an order of magnitude lower than those

observed in the shallower subsurface soil interval. PAH concentrations in the 1–4 ft interval (Figure 5-12) were similar to those observed in the associated ISM surface soil sample ASYss-027M (Figure 5-5). Locations ASYss-027M and ASYsb-063 are located within a drainage ditch east of Atlas Scrap Yard and alongside Paris-Windham Road. The PAHs observed at these locations are likely sourced from road runoff.

Twelve PAHs were detected in the 1–4 ft bgs interval near the Railroad Ballast (ASYsb-048), including naphthalene at its maximum concentration. No PAHs were detected in the underlying 4–7 ft bgs sample at this location. PAH concentrations at ASYsb-048 in the 1–4 ft bgs interval (Figure 5-11) were approximately two orders of magnitude lower than those observed in the associated grid ISM surface soil sample ASYss-089M (Figure 5-10).

All SVOC SRCs identified for subsurface soil were also identified as SRCs for the surface soil. No real trends of increasing or decreasing concentrations with depth were observed for organic SRCs. Additionally, no CERCLA-release related sources of PAHs were identified for this AOC.

5.3.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls

Three VOCs (2-butanone, carbon disulfide, and toluene) were identified as SRCs in subsurface soil. No pesticides or PCBs were detected in subsurface soil. The distribution of VOCs in subsurface soil is shown in Figures 5-11 through 5-13.

The VOC 2-butanone was detected only in the 1–4 ft bgs interval at location ASYsb-046, with a concentration of 0.0098J mg/kg. Carbon disulfide was detected in three samples, including the 1–4 and 4–7 ft bgs interval at soil boring location ASYsb-062 with concentrations of 0.0011J mg/kg and 0.0014J mg/kg (MDC), respectively. Toluene was detected at only ASYsb-062 in the 4–7 ft bgs interval at a concentration of 0.00037J mg/kg.

No VOC SRCs identified for subsurface soil were identified as SRCs for surface soil. No trends of increasing or decreasing concentrations with depth were observed with the organic SRCs.

5.4 GEOTECHNICAL SUBSURFACE SOIL SAMPLES

Two soil borings were completed at Atlas Scrap Yard for the purposes of obtaining geotechnical parameters to support vadose zone soil leaching and groundwater transport modeling. Four undisturbed samples were collected from two subsurface soil borings, including ASYsb-051 from the 4.0–5.6 and 8.5–10.0 ft bgs intervals and ASYsb-055 from the 4.0–5.5 and 9.0–10.5 ft bgs intervals. Groundwater was encountered at depths of 10.3 and 11.1 ft bgs at soil boring locations ASYsb-051 and ASYsb-055, respectively. Both borings were advanced to a total depth of 13.0 ft bgs, and bedrock was not encountered at either location. Table 5-2 summarizes the results of the geotechnical characteristics of Atlas Scrap Yard soil. Laboratory analytical data package results are presented in Appendix D.

5.5 CONTAMINANT NATURE AND EXTENT IN SEDIMENT

Sediment collected within the AOC as part of the Characterization of 14 AOCs was considered dry sediment, as surface water only occurs intermittently as stormwater runoff at Atlas Scrap Yard. As discussed in Section 1.2, dry sediment is classified as soil in this report. Two sediment samples were collected in the ditch east of Atlas Scrap Yard and Paris-Windham Road adjacent to Load Line 12: one ISM sample was collected during the Characterization of 14 AOCs (ASYsd-024M-SD), and one discrete sample was collected during the PBA08 RI (L12sd-308). The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains details of sample collection. These sediment samples were incorporated into the Atlas Scrap Yard evaluation to represent the potential exit point for runoff or surface drainage from the AOC. The results of the SRC screening for the ISM and discrete datasets are presented in Tables 4-22 and 4-23, respectively. The results of the detected analytes for the PBA08 RI sediment samples are summarized in Table 4-15. Complete copies of the laboratory analytical packages are presented in Appendix D. Figure 5-14 presents the location and concentrations of SRCs identified in sediment.

5.5.1 Explosives and Propellants

One explosive (2-amino-4,6-DNT) was identified as an SRC for the ISM sediment dataset, as it was detected at a concentration of 0.08J mg/kg in historical ISM sample ASYsd-024M (Figure 5-14). Explosives were not detected or identified as SRCs for the discrete sediment dataset.

Propellants were not analyzed in discrete or ISM sediment samples, as these locations were not RVAAP full-suite sample locations.

5.5.2 Inorganic Chemicals

Five inorganic chemicals were identified as SRCs in discrete sediment. The majority of inorganic SRC detections at PBA08 RI discrete location L12sd-308 occurred at levels less than twice their respective background concentrations.

Ten inorganic chemicals were identified as SRCs in the ISM screening dataset for sediment. The inorganic SRCs observed at historical sediment sample ASYsd-024M occurred at concentrations only marginally above their respective screening levels (i.e., within the same order of magnitude and less than twice their respective background concentrations). The distribution of inorganic chemicals in sediment is shown in Figure 5-14.

5.5.3 Semi-volatile Organic Compounds

Seventeen SVOCs, all of which were PAHs, were identified as SRCs in the discrete sediment dataset. SVOC analysis was not performed on the historical ISM sediment sample ASYsd-024M. The surface soil grid ISM area (ASYss-100M, shown in Figure 5-14), immediately adjacent to the drainage ditch along the west side of Paris-Windham Road where discrete sediment sample L12sd-308 was located, exhibited similar concentrations of PAHs to those observed in sediment.

5.5.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls

No PCBs were detected or identified as SRCs for sediment in the discrete dataset for Atlas Scrap Yard; these analyses were not performed on the historical ISM sediment sample. VOCs and pesticides analyses were not performed on either the discrete or ISM sediment datasets.

5.6 CONTAMINANT NATURE AND EXTENT IN SURFACE WATER

Surface water was not collected within the AOC during the PBA08 RI, as surface water only occurs intermittently as stormwater runoff at Atlas Scrap Yard. One surface water sample (L12sw-308) was collected in the ditch east of Atlas Scrap Yard along Paris-Windham Road under the PBA08 RI for Load Line 12. The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains details of sample collection.

This surface water sample was incorporated into the Atlas Scrap Yard evaluation to represent the potential exit point for runoff or surface drainage from the AOC. However, this sample point is also immediately adjacent to Paris-Windham Road and can be subjected to contaminants associated with roads (e.g., PAHs from asphalt). This sample was analyzed for RVAAP full-suite analytes. Table 4-24 presents the results of the SRC screening for surface water. The results of the detected analytes for the PBA08 RI surface water samples are summarized in Table 4-16. Complete copies of the laboratory analytical packages are presented in Appendix D. The field measurements recorded during surface water sample collection are summarized in Table 5-3. Figure 5-14 presents the location and concentrations of SRCs identified in surface water.

5.6.1 Explosives and Propellants

No propellants or explosives were detected or identified as SRCs in surface water at L12-308.

5.6.2 Inorganic Chemicals

A total of 17 inorganic chemicals (16 metals and one nitrate) were identified as SRCs in surface water at L12-308. Only five inorganic chemicals were identified as SRCs in the co-located PBA08 RI sediment sample L12sd-308, with only three (beryllium, cadmium, and nickel) corresponding to surface water SRCs. Six of the inorganic chemicals (aluminum, arsenic, barium, copper, manganese, and zinc) observed in surface water sample L12sw-308 had concentrations that were on average an order of magnitude higher than their respective background concentrations.

5.6.3 Semi-volatile Organic Compounds

Seven SVOCs [all of which were PAHs with the exception of bis(2-ethylhexyl)phthalate] were identified as SRCs for surface water. With the exception of bis(2-ethylhexyl)phthalate, all SVOC SRCs detected at surface water location L12sw-308 were also detected in the co-located PBA08 RI sediment sample at this location (L12sd-308).

5.6.4 Volatile Organic Compounds, Pesticides, and Polychlorinated Biphenyls

The pesticide delta-hexachlorobenzene (BHC) was identified as an SRC in surface water. Delta-BHC was detected at 0.00001J mg/kg at L12sw-308 (Figure 5-14). No VOCs or PCBs were detected in surface water.

5.7 SUMMARY OF CONTAMINANT NATURE AND EXTENT

Data from the 2004 Characterization of 14 AOCs, 2010 PBA08 RI, and 2011 PBA08 RI subsequent sampling event provide effective characterization of the nature and extent of the contamination at the AOC. The predominant SRCs in surface and subsurface soil at Atlas Scrap Yard were PAHs, which were observed in all surface soil samples analyzed across the entire AOC. The highest levels of PAHs were identified during the PBA08 RI within the parking areas made up of slag and asphalt gravel used for vehicle traffic and equipment and material staging within the ASA and the ditch paralleling an access road (sample ASYss-126M). Elevated concentrations of PAHs were confined to surface soil (0–1 ft bgs). A large majority of subsurface samples had nondetectable concentrations of these PAHs.

No explosive contamination was identified by former Building T-6 Materials Testing Laboratory or by the former staging area of 90mm wooden packing boxes. Inorganic chemicals were observed in surface soil at concentrations above their respective background concentrations throughout the AOC. The former incinerator (sample ASYss-019M) had an elevated concentration of lead at 1,200 mg/kg. This contamination appears to be confined to the surface soil, as nearby boring ASYsb-064 had lead concentrations of 18.4 J mg/kg from 1–4 ft bgs and 33 mg/kg from 4–7 ft bgs. Any remedial activities associated with the surface soil at the former incinerator would require confirmation that the contamination is confined to surface soil (0–1 ft bgs).

A limited number of SRCs were observed in subsurface soil, sediment, and surface water, relative to surface soil. Detections of explosives, propellants, VOCs, pesticides, and PCBs were limited in frequency at the AOC.

It is recommended that no further sampling be conducted; however, considerations can be made for evaluation of PCBs by former Building T-4704 Roads and Grounds Maintenance Building. Although no releases were documented at this location, additional sampling of the surface soil may be considered.

Table 5-1. Chromium Speciation Results

Sample location	Hexavalent Chromium Concentration (mg/kg)	Total Chromium Concentration[a] (mg/kg)	Percent Hexavalent Chromium (%)
ASYss-066	0.97 J	13.5 J	7.2
ASYss-067	1 J	15.5 J	6.5
ASYss-068	<1.1 U	10.7 J	NA

[a] Background screening value for total chromium = 17.4 mg/kg. No BSV is available for hexavalent chromium.
J = Estimated value less than reporting limits.
mg/kg = Milligrams per kilogram.
NA = Not applicable; hexavalent chromium not detected in sample.
U = Non-detectable concentration.

Table 5-2. Summary of Geotechnical Parameters

Sample ID: Parameters	ASYsb-051-5684-SO	ASYsb-051-5685-SO	ASYsb-055-5700-SO	ASYsb-055-5701-SO
Depth	4.0-5.6 ft bgs	8.5-10.0 ft bgs	4.0-5.5 ft bgs	9.0-10.5 ft bgs
Porosity	36.7%	38.6%	38.3%	30.1%
Density	1.73 g/cm^3	1.68 g/cm^3	1.69 g/cm^3	1.91 g/cm^3
Moisture content	21.5%	21.3%	19.7%	15.7%
Total organic carbon	2,200 mg/kg	5,100 mg/kg	2,200 mg/kg	2,000 mg/kg
Size fraction analysis	16.1% sand, 43.1% silt, 40.7% clay	0.6% gravel, 2.7% sand, 34.8 % silt, 61.9 % clay	6.1% sand, 56.2% silt, 37.7% clay	6.2% gravel, 25.6% sand, 36.4% silt, 31.8% clay
Permeability (K)	1.1E-07 cm/sec	2.3E-08 cm/sec	3.6E-08 cm/sec	4.7E-08 cm/sec

cm/sec = Centimeters per second.
ft bgs = Feet below ground surface.
g/cm^3 = Grams per cubic centimeter.
ID = Identification.
mg/kg = Milligrams per kilogram.

Table 5-3. Surface Water Field Measurements

Location	Temperature (ºC)	pH (S.U.)	Conductivity (mS/cm)	Dissolved Oxygen (mg/L)	Turbidity (NTU)
L12sw-308	7.63	7.33	0.187	11.21	5.22

ºC = Degrees Celsius.
mg/L = Milligrams per liter.
mS/cm = Millisiemens per centimeter.
NTU = Nephelometric turbidity units.
S.U. = Standard unit.

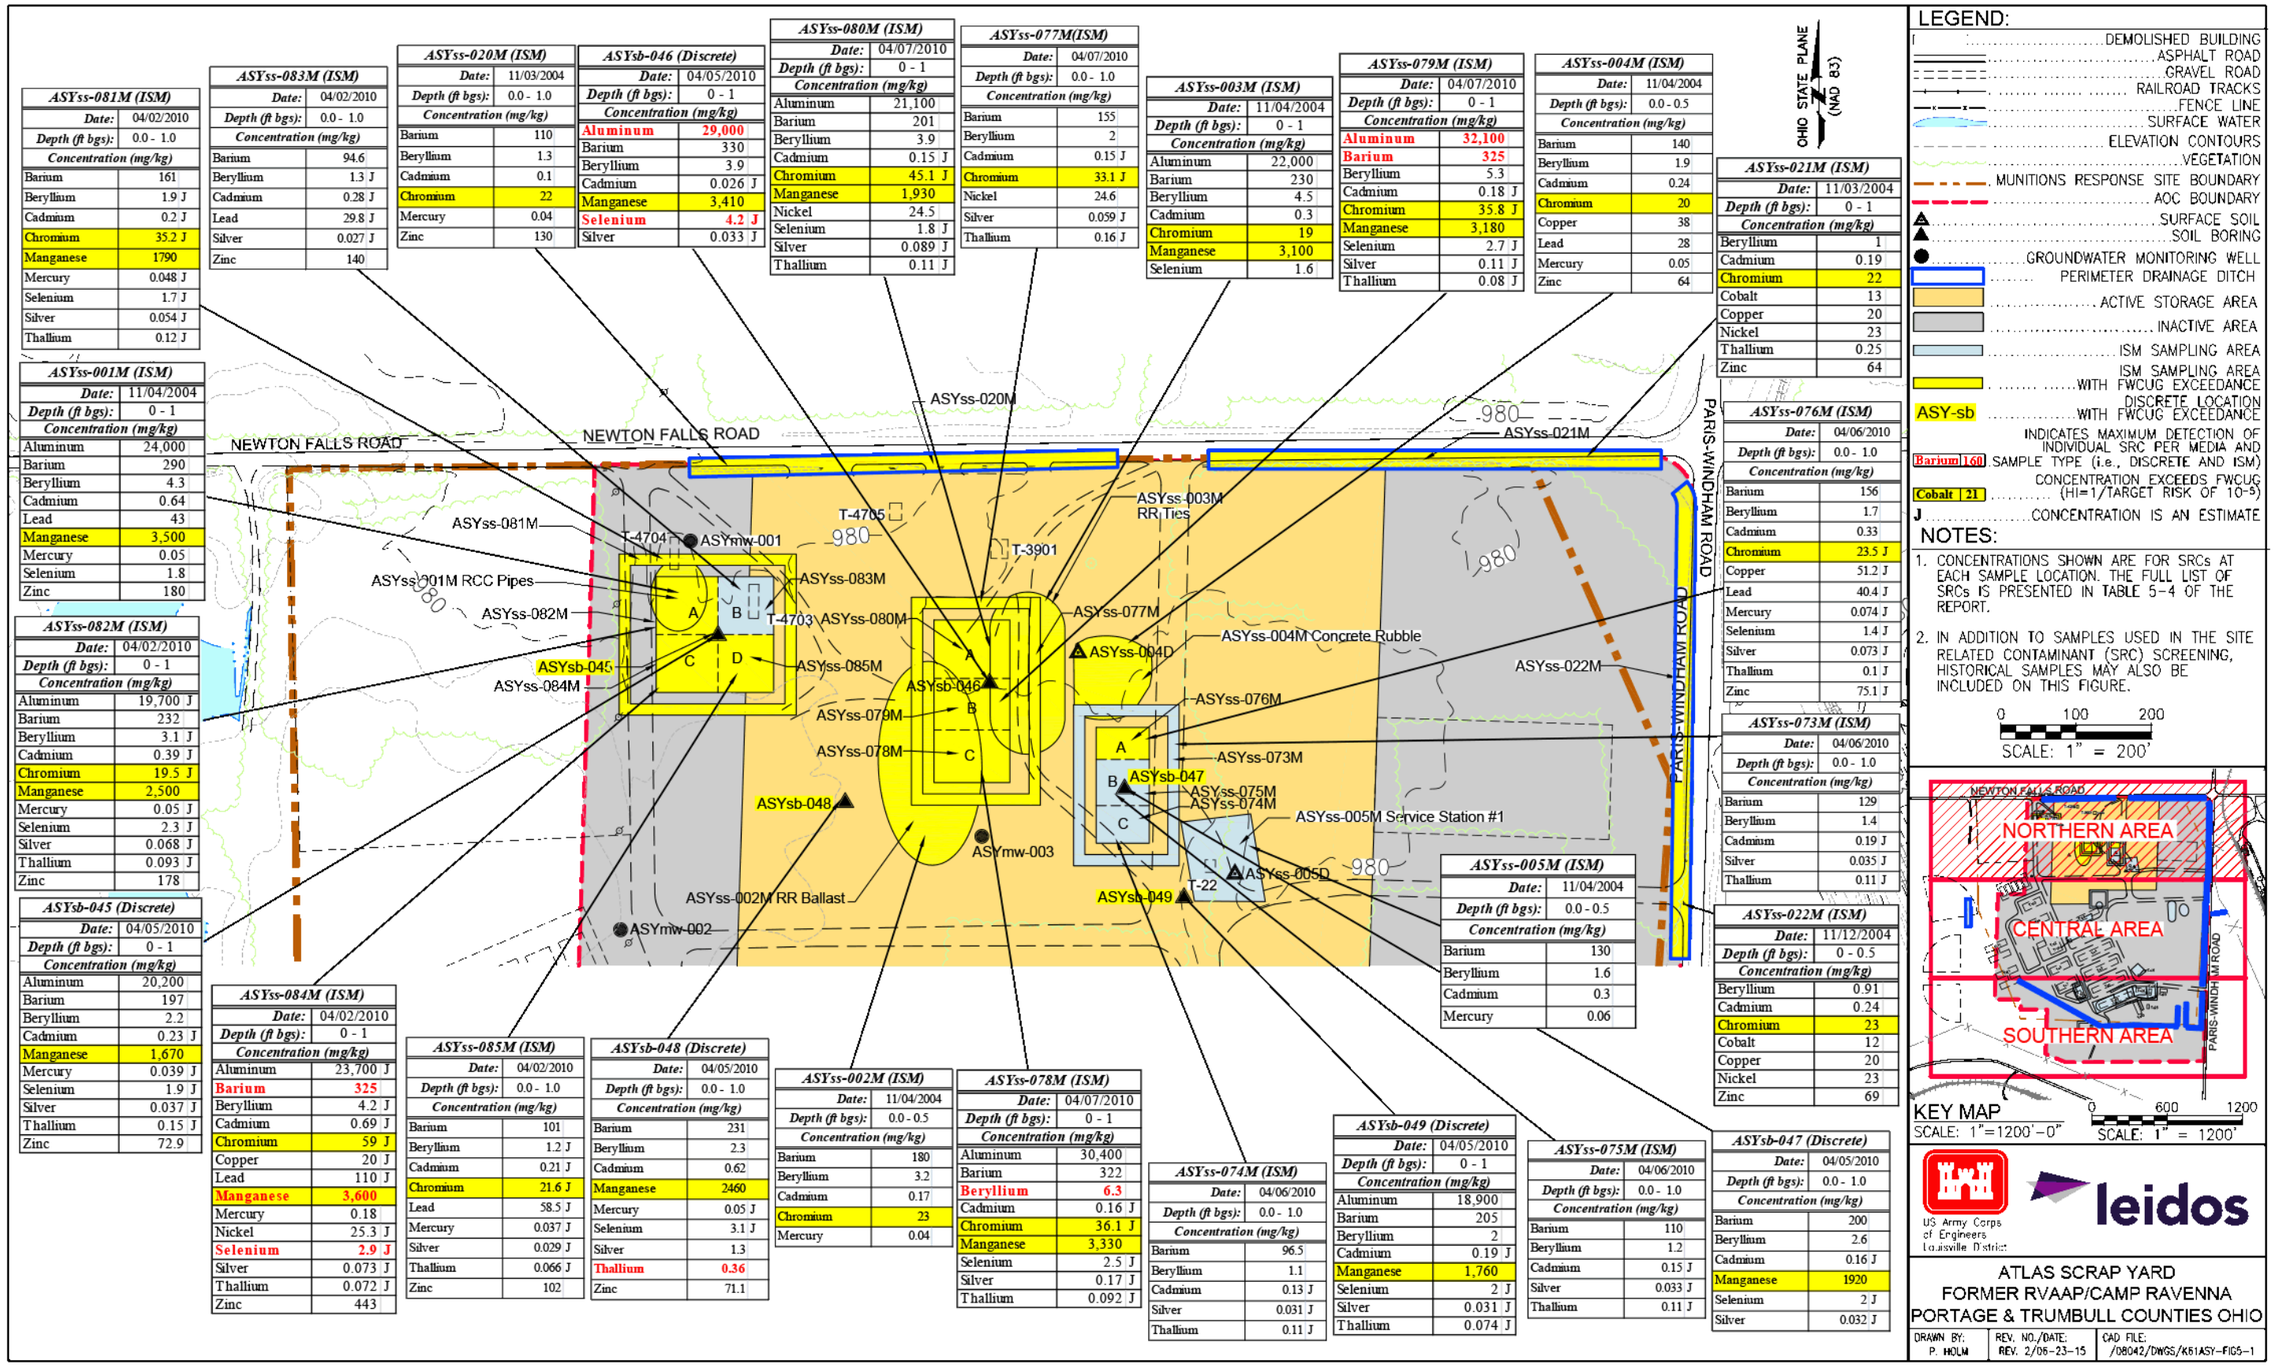


Figure 5–1. Concentrations of Inorganic SRCs in Surface Soil Samples at the Northern Area

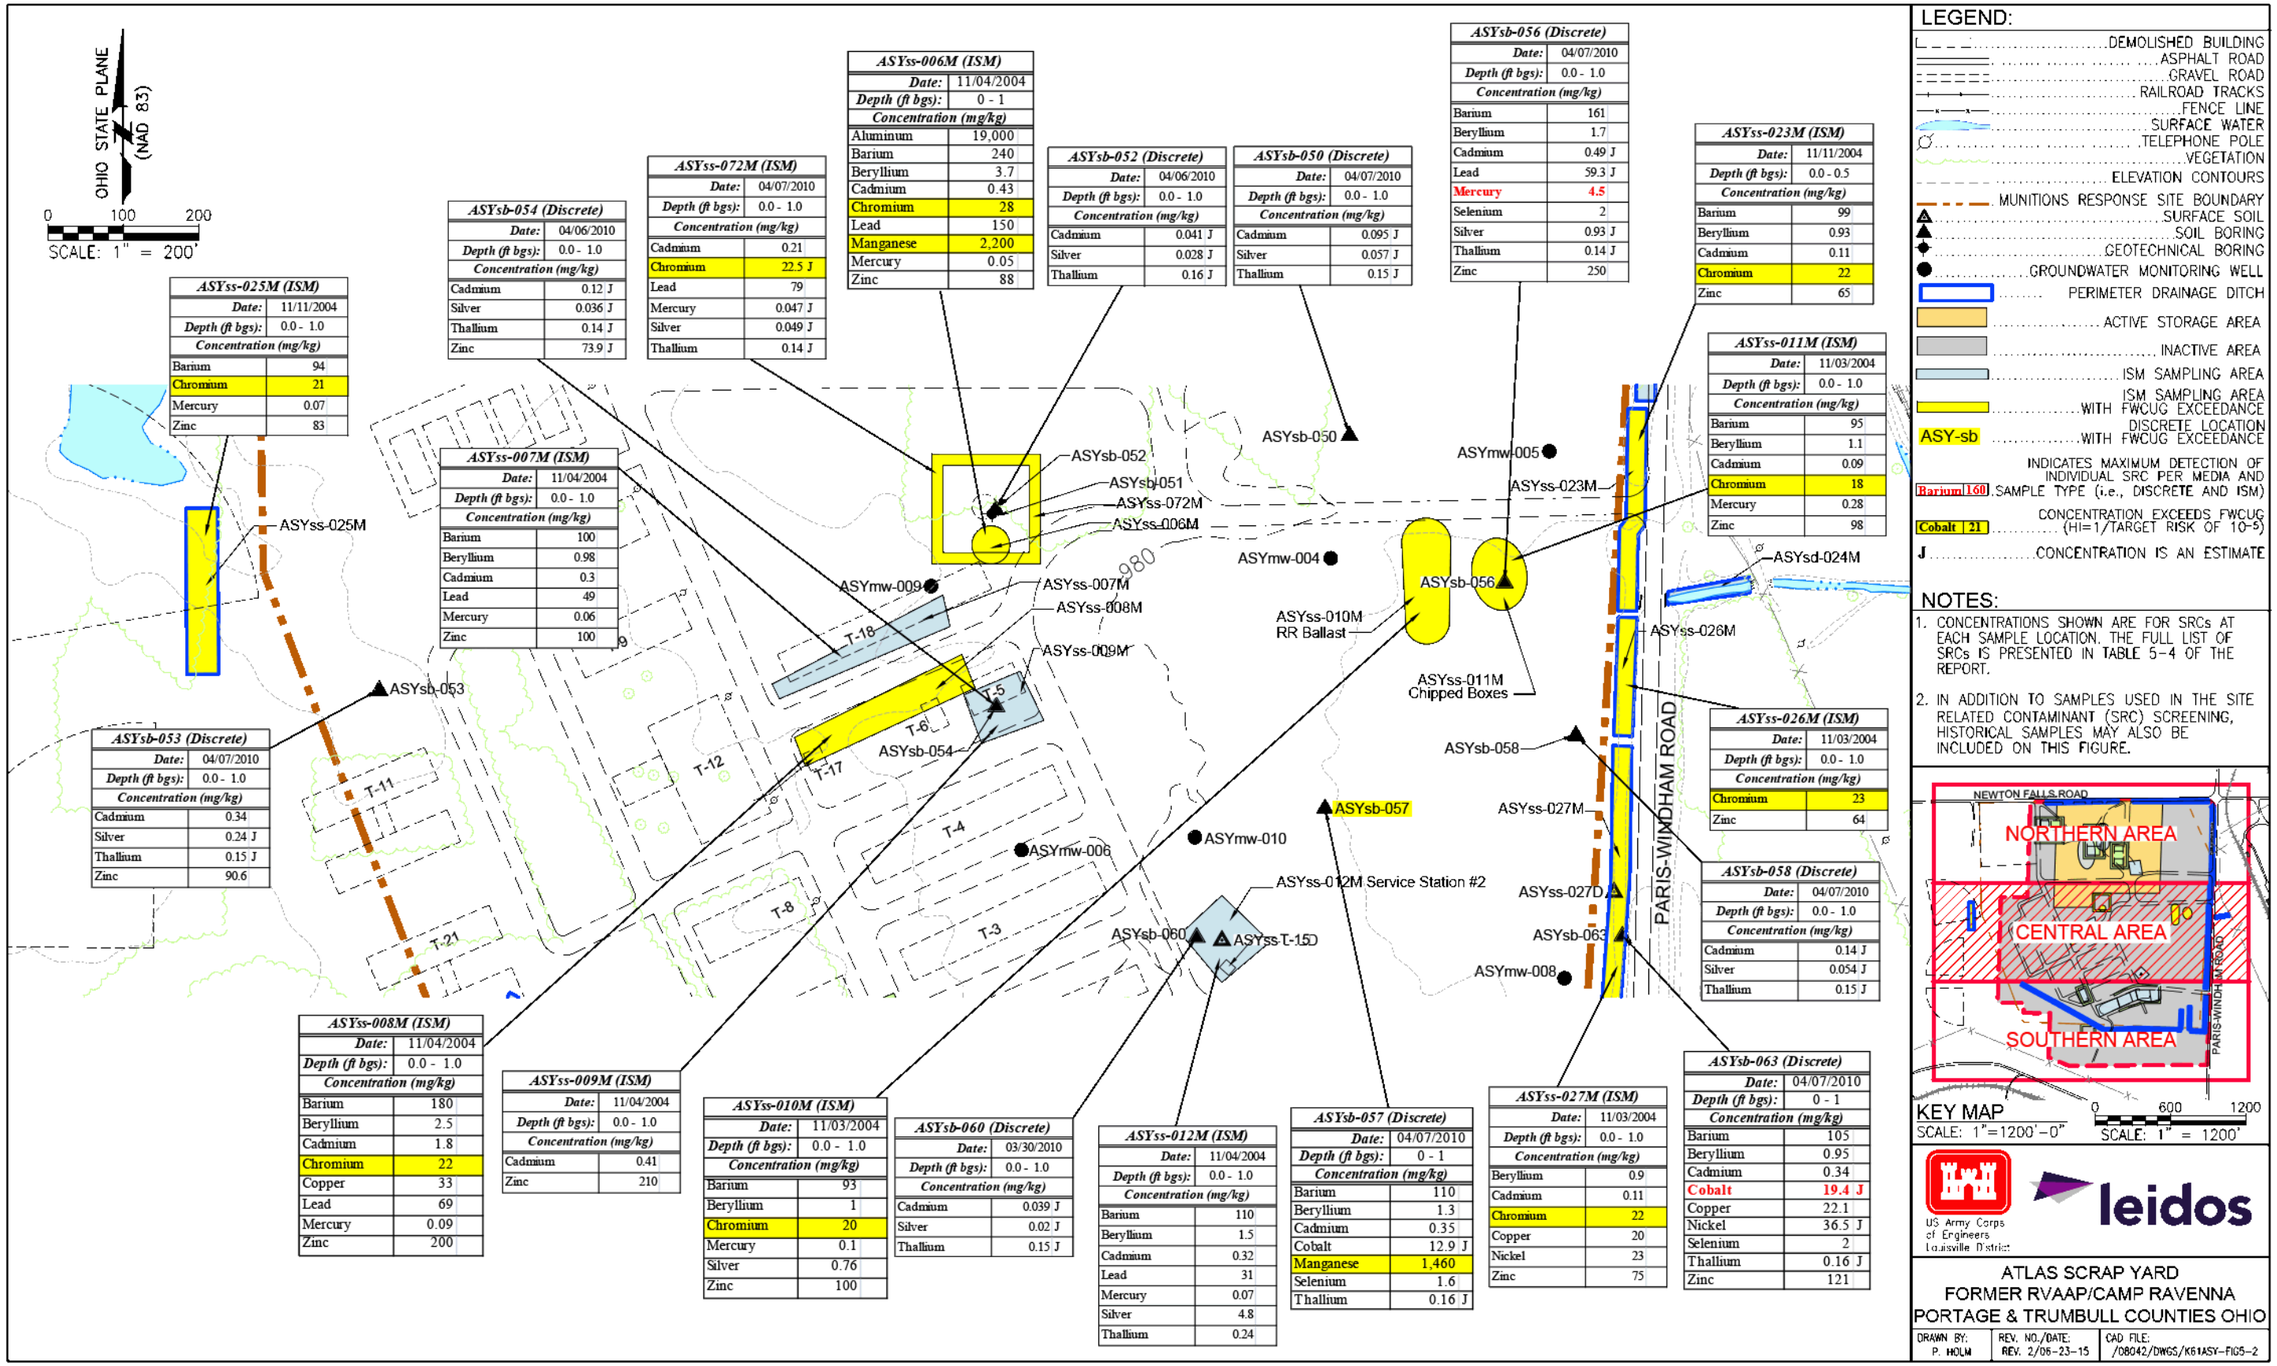


Figure 5–2. Concentrations of Inorganic SRCs in Surface Soil Samples at the Central Area

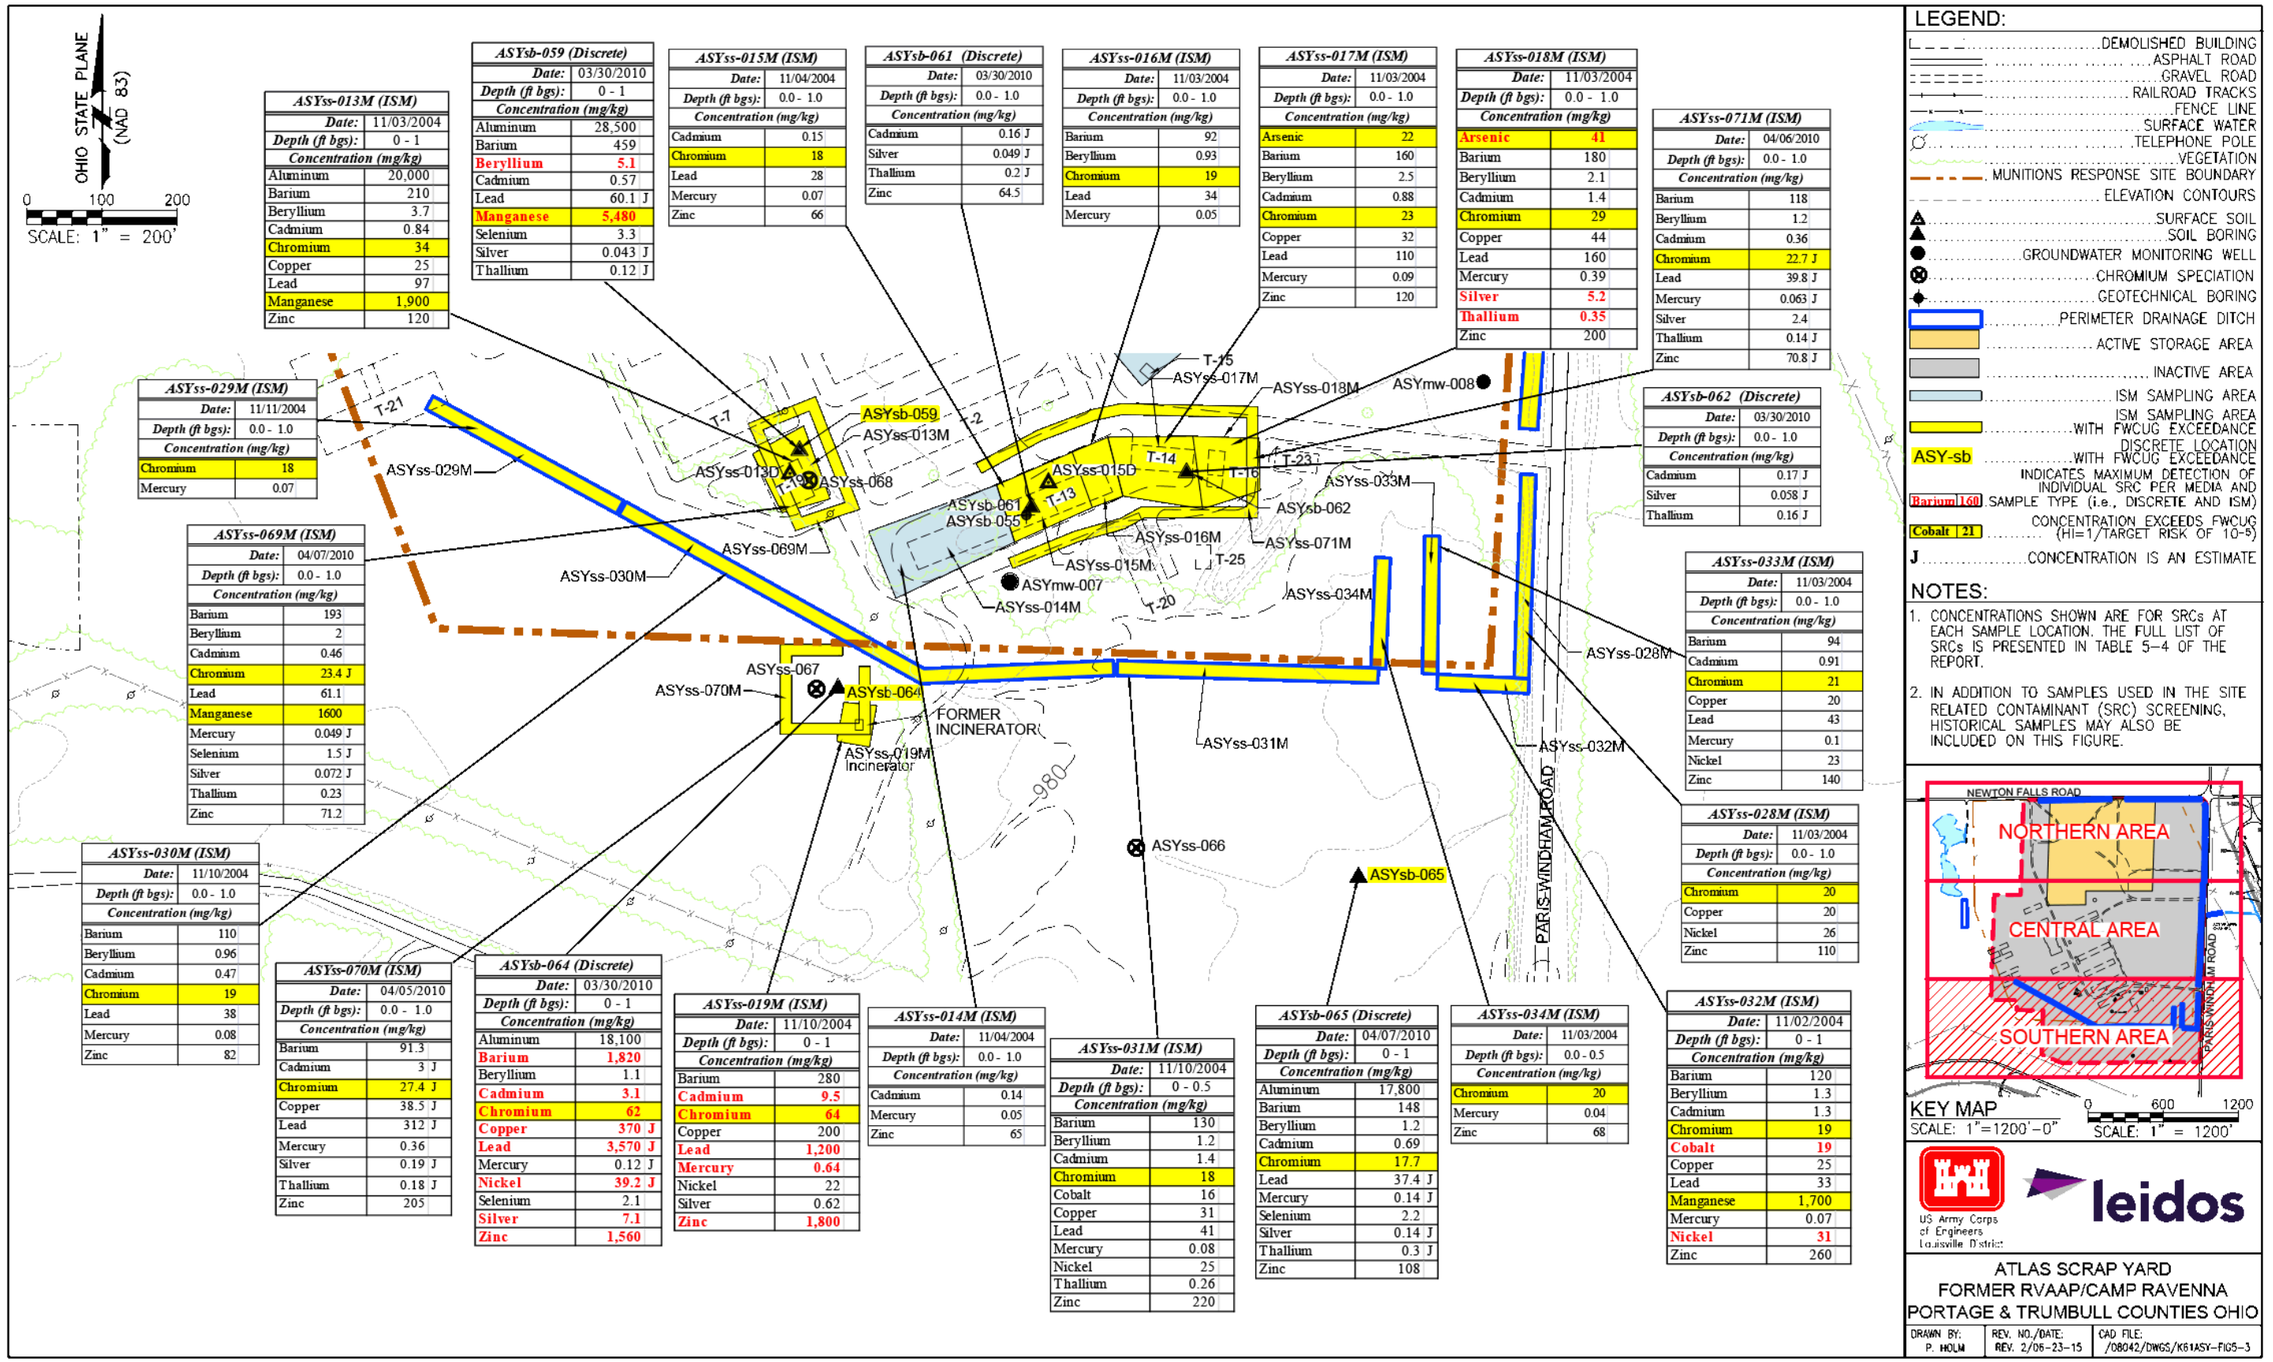


Figure 5–3. Concentrations of Inorganic SRCs in Surface Soil Samples at the Southern Area

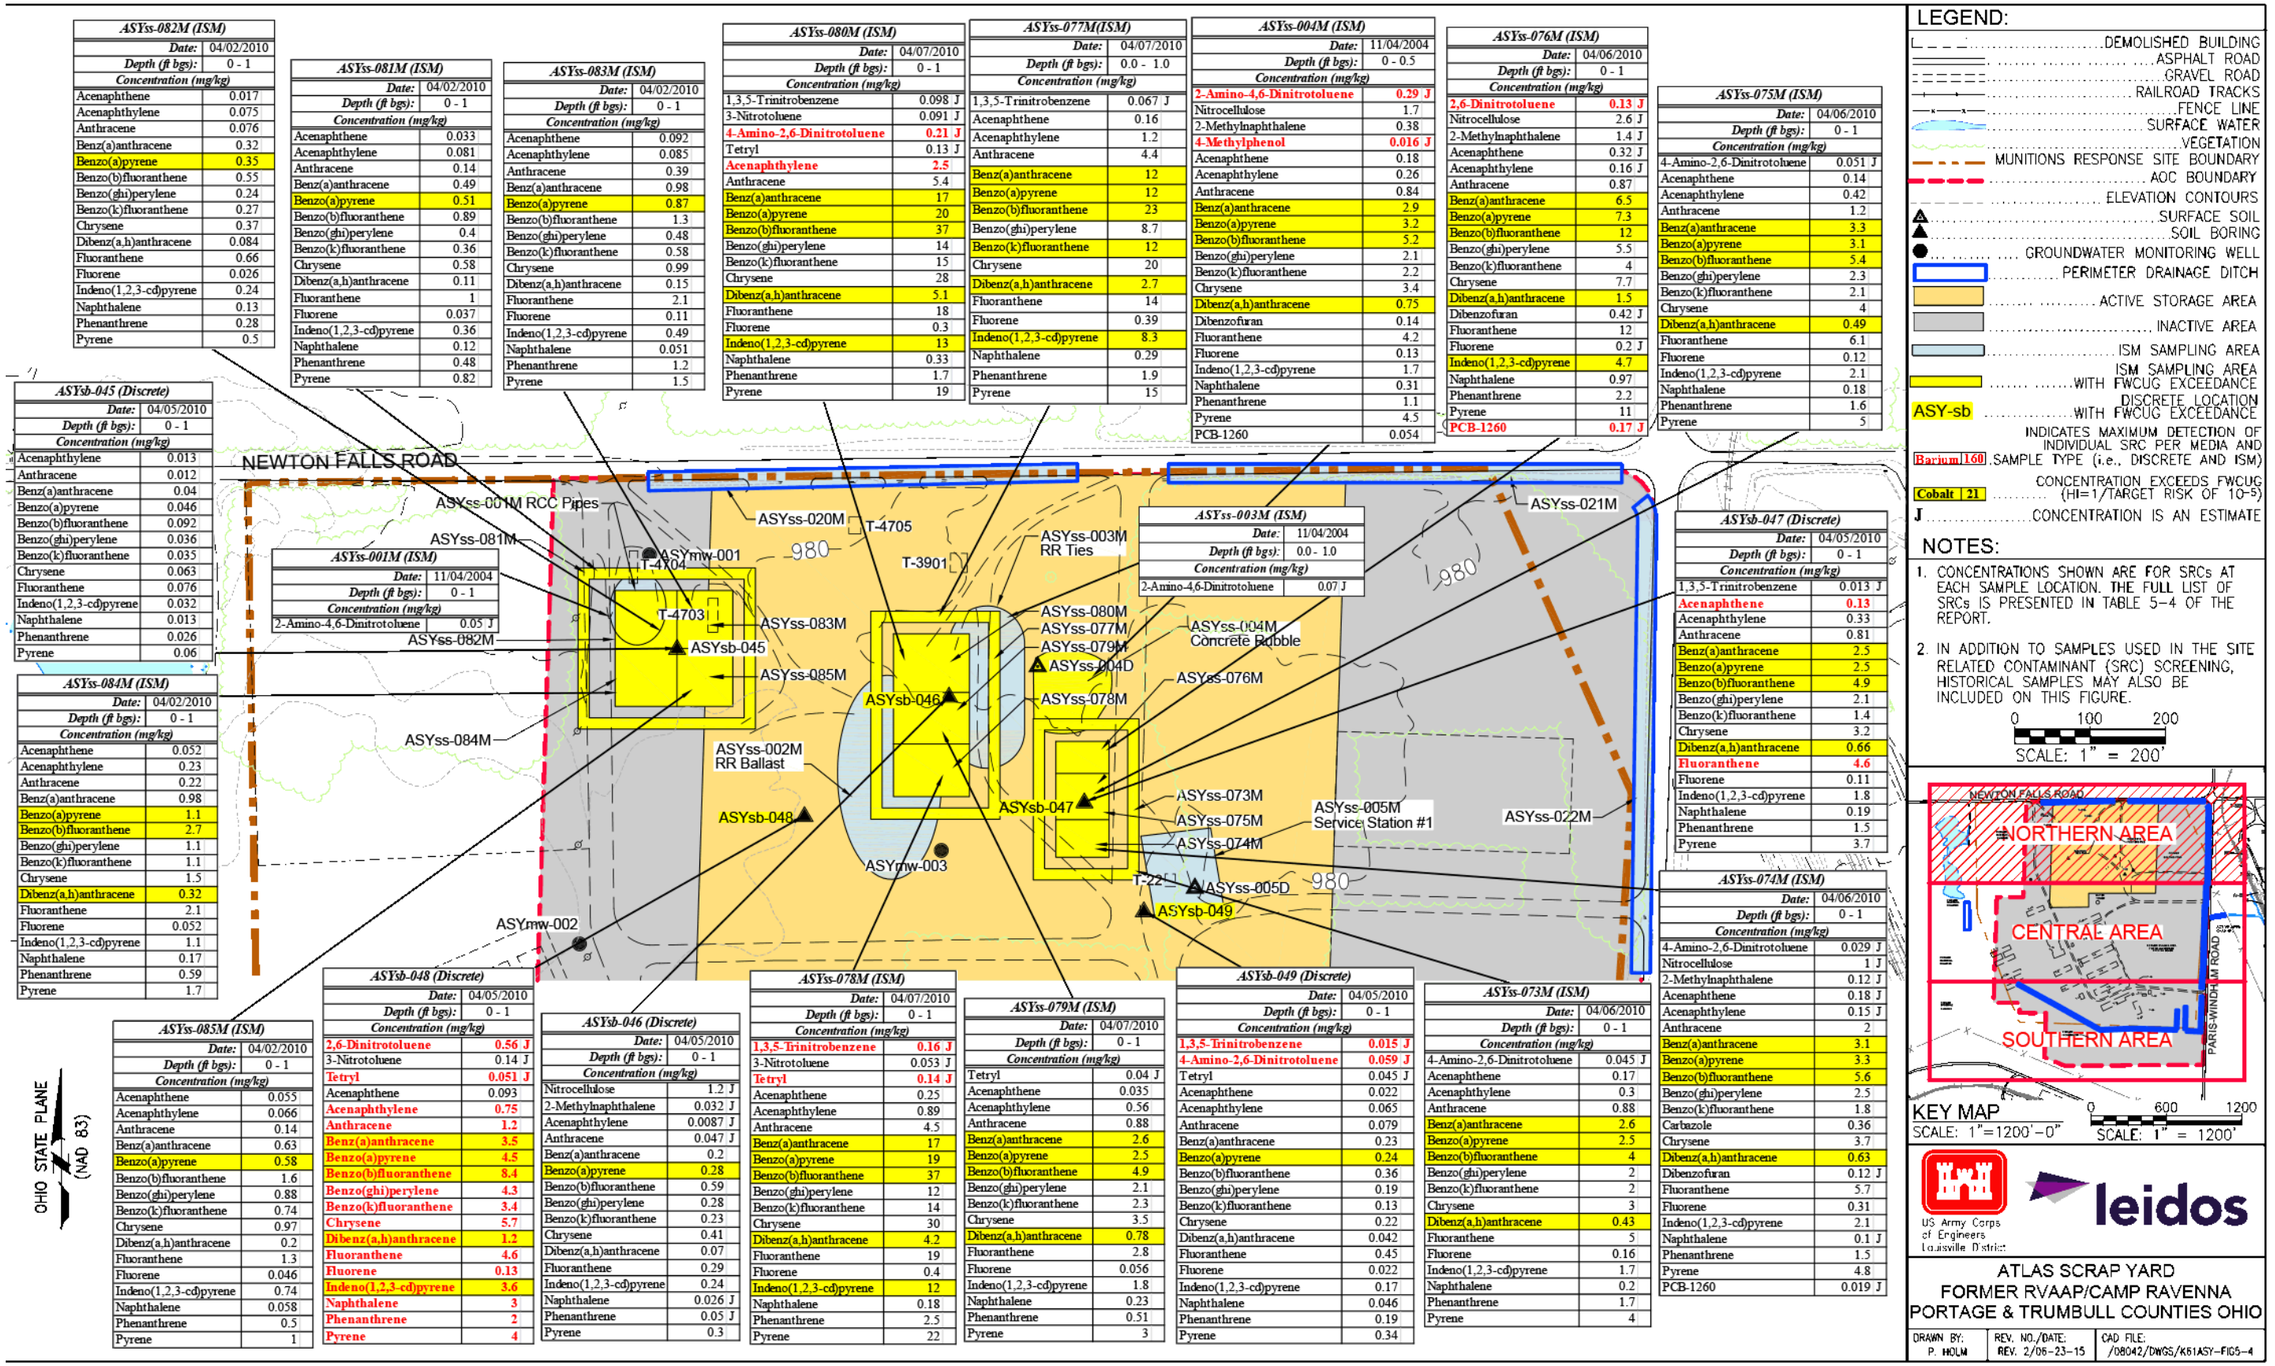


Figure 5–4. Concentrations of Organic SRCs in Surface Soil Samples at the Northern Area

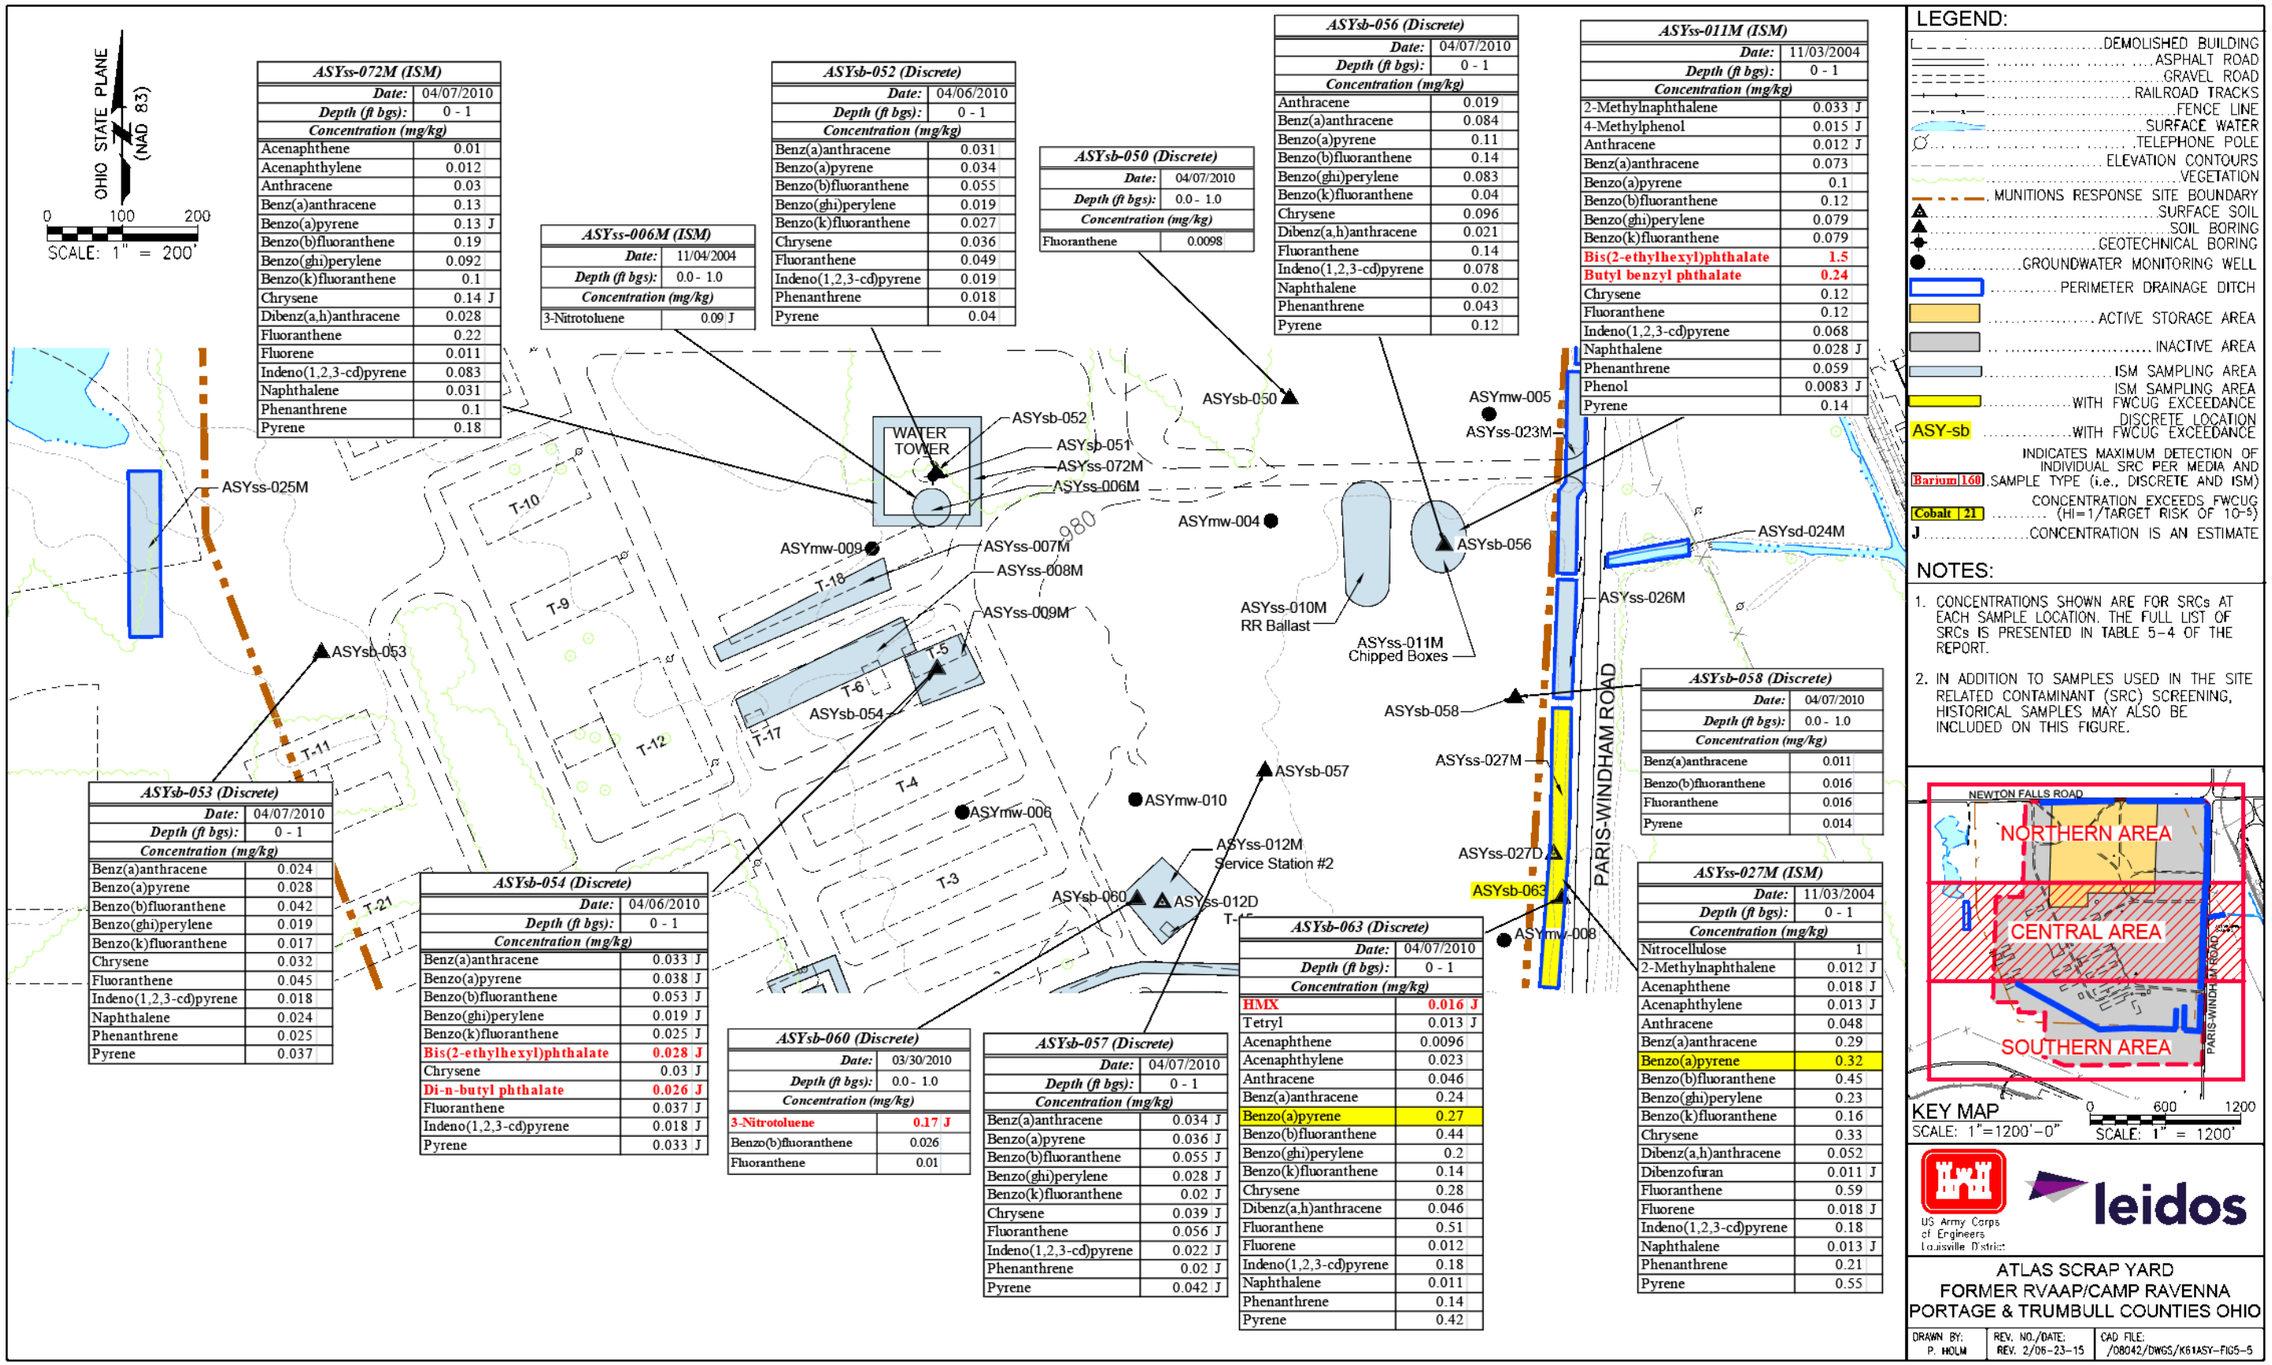


Figure 5–5. Concentrations of Organic SRCs in Surface Soil Samples at the Central Area

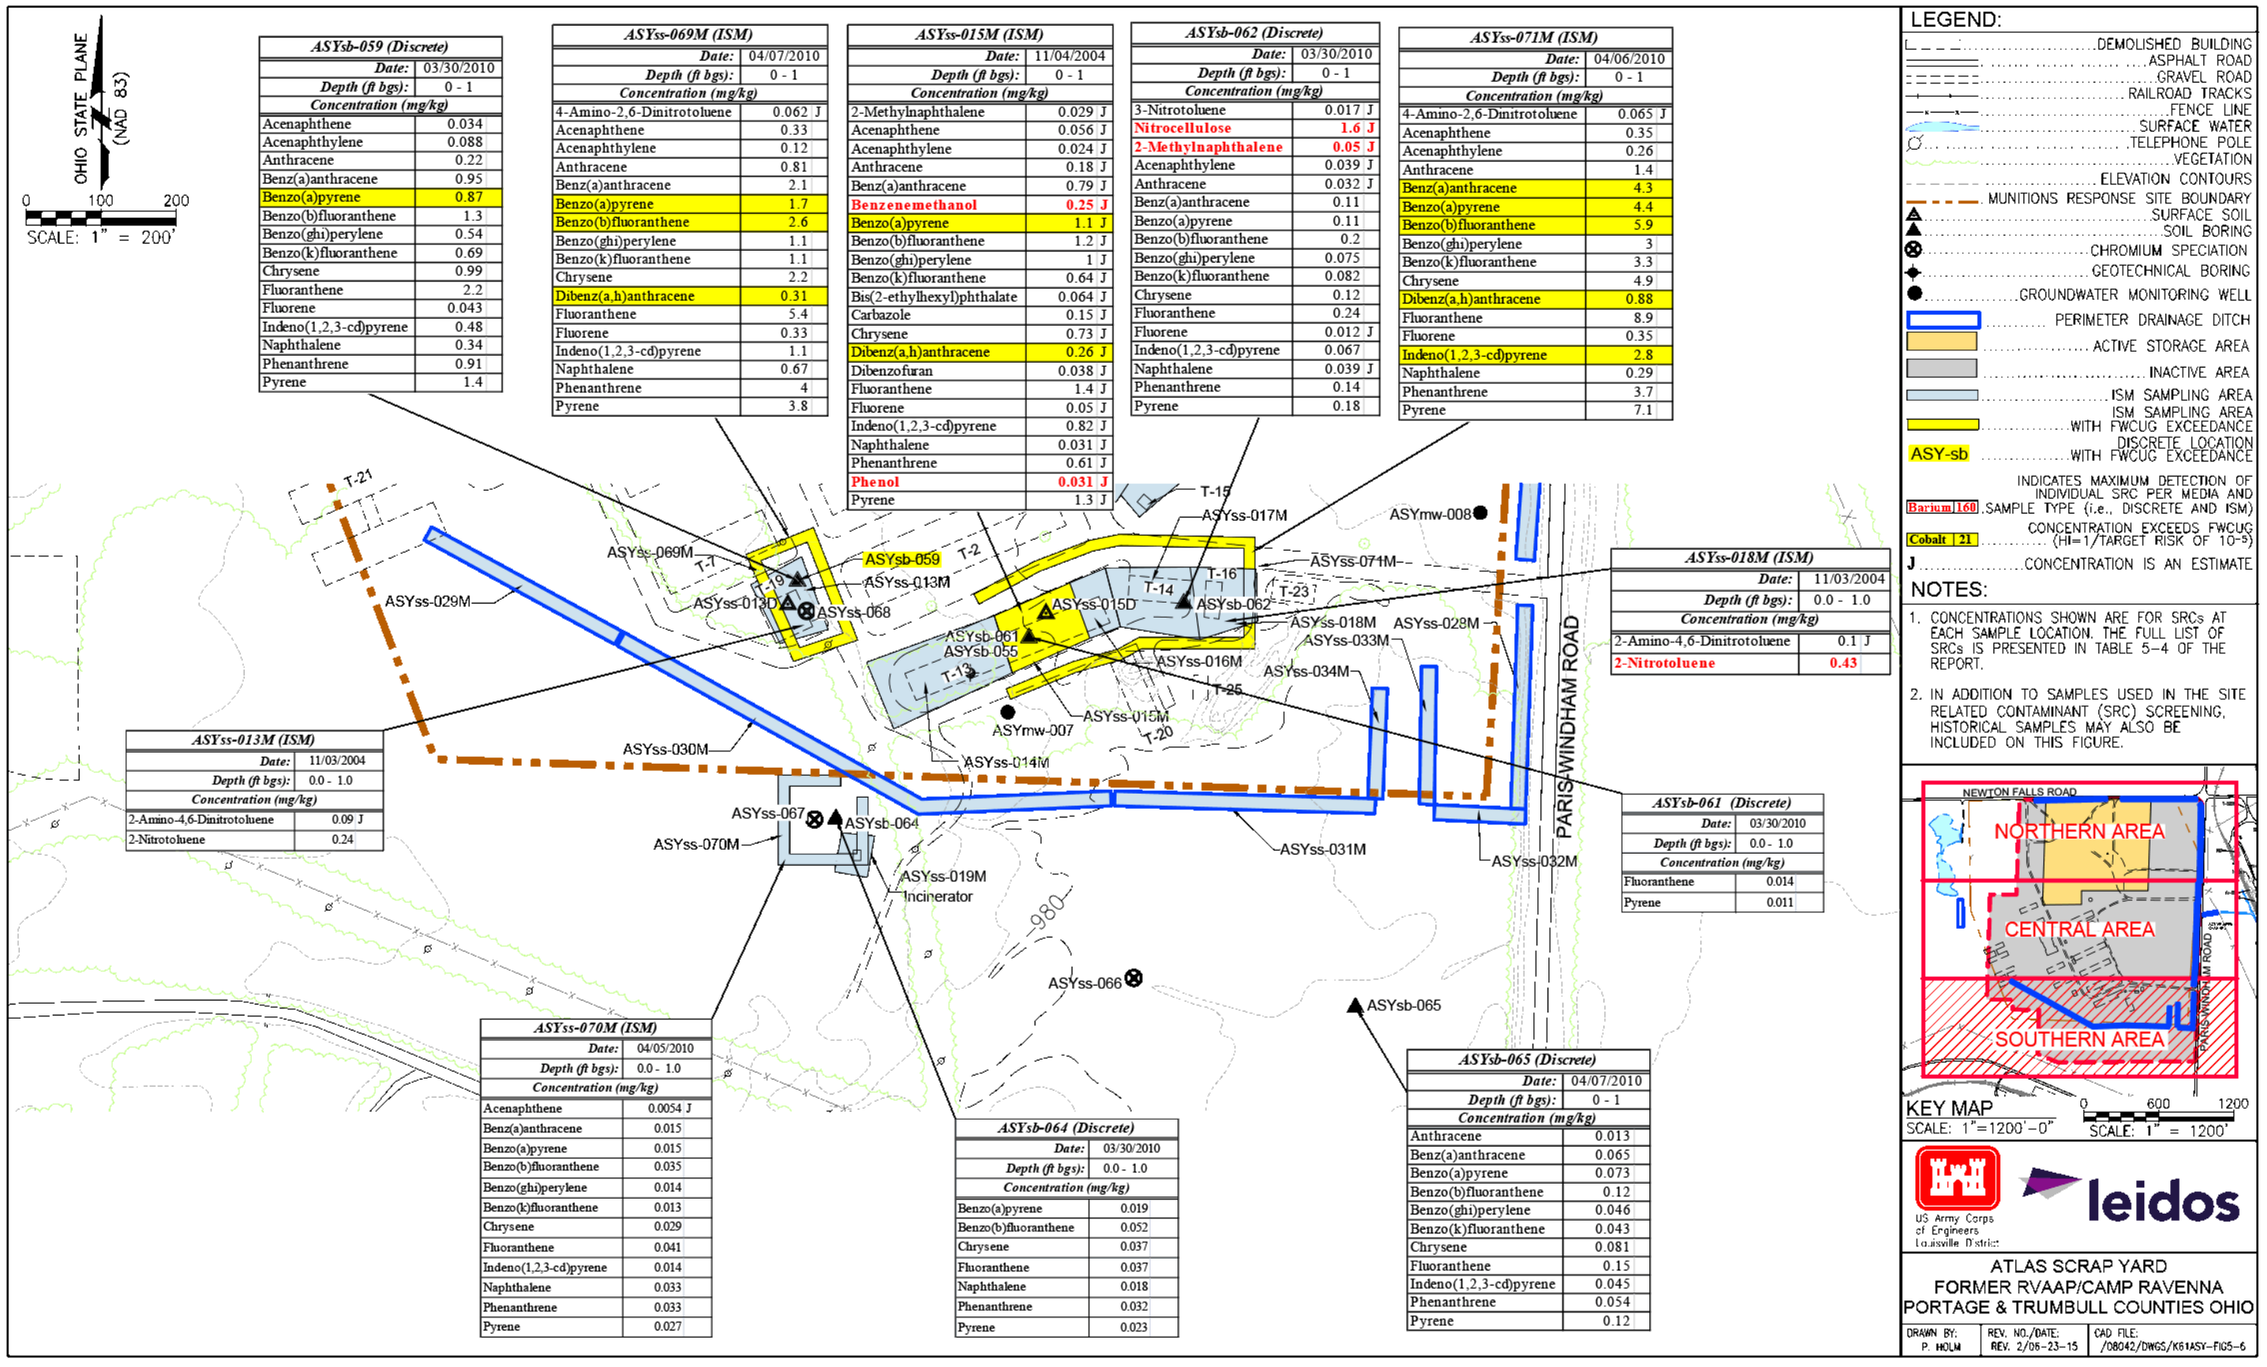


Figure 5–6. Concentrations of Organic SRCs in Surface Soil Samples at the Southern Area

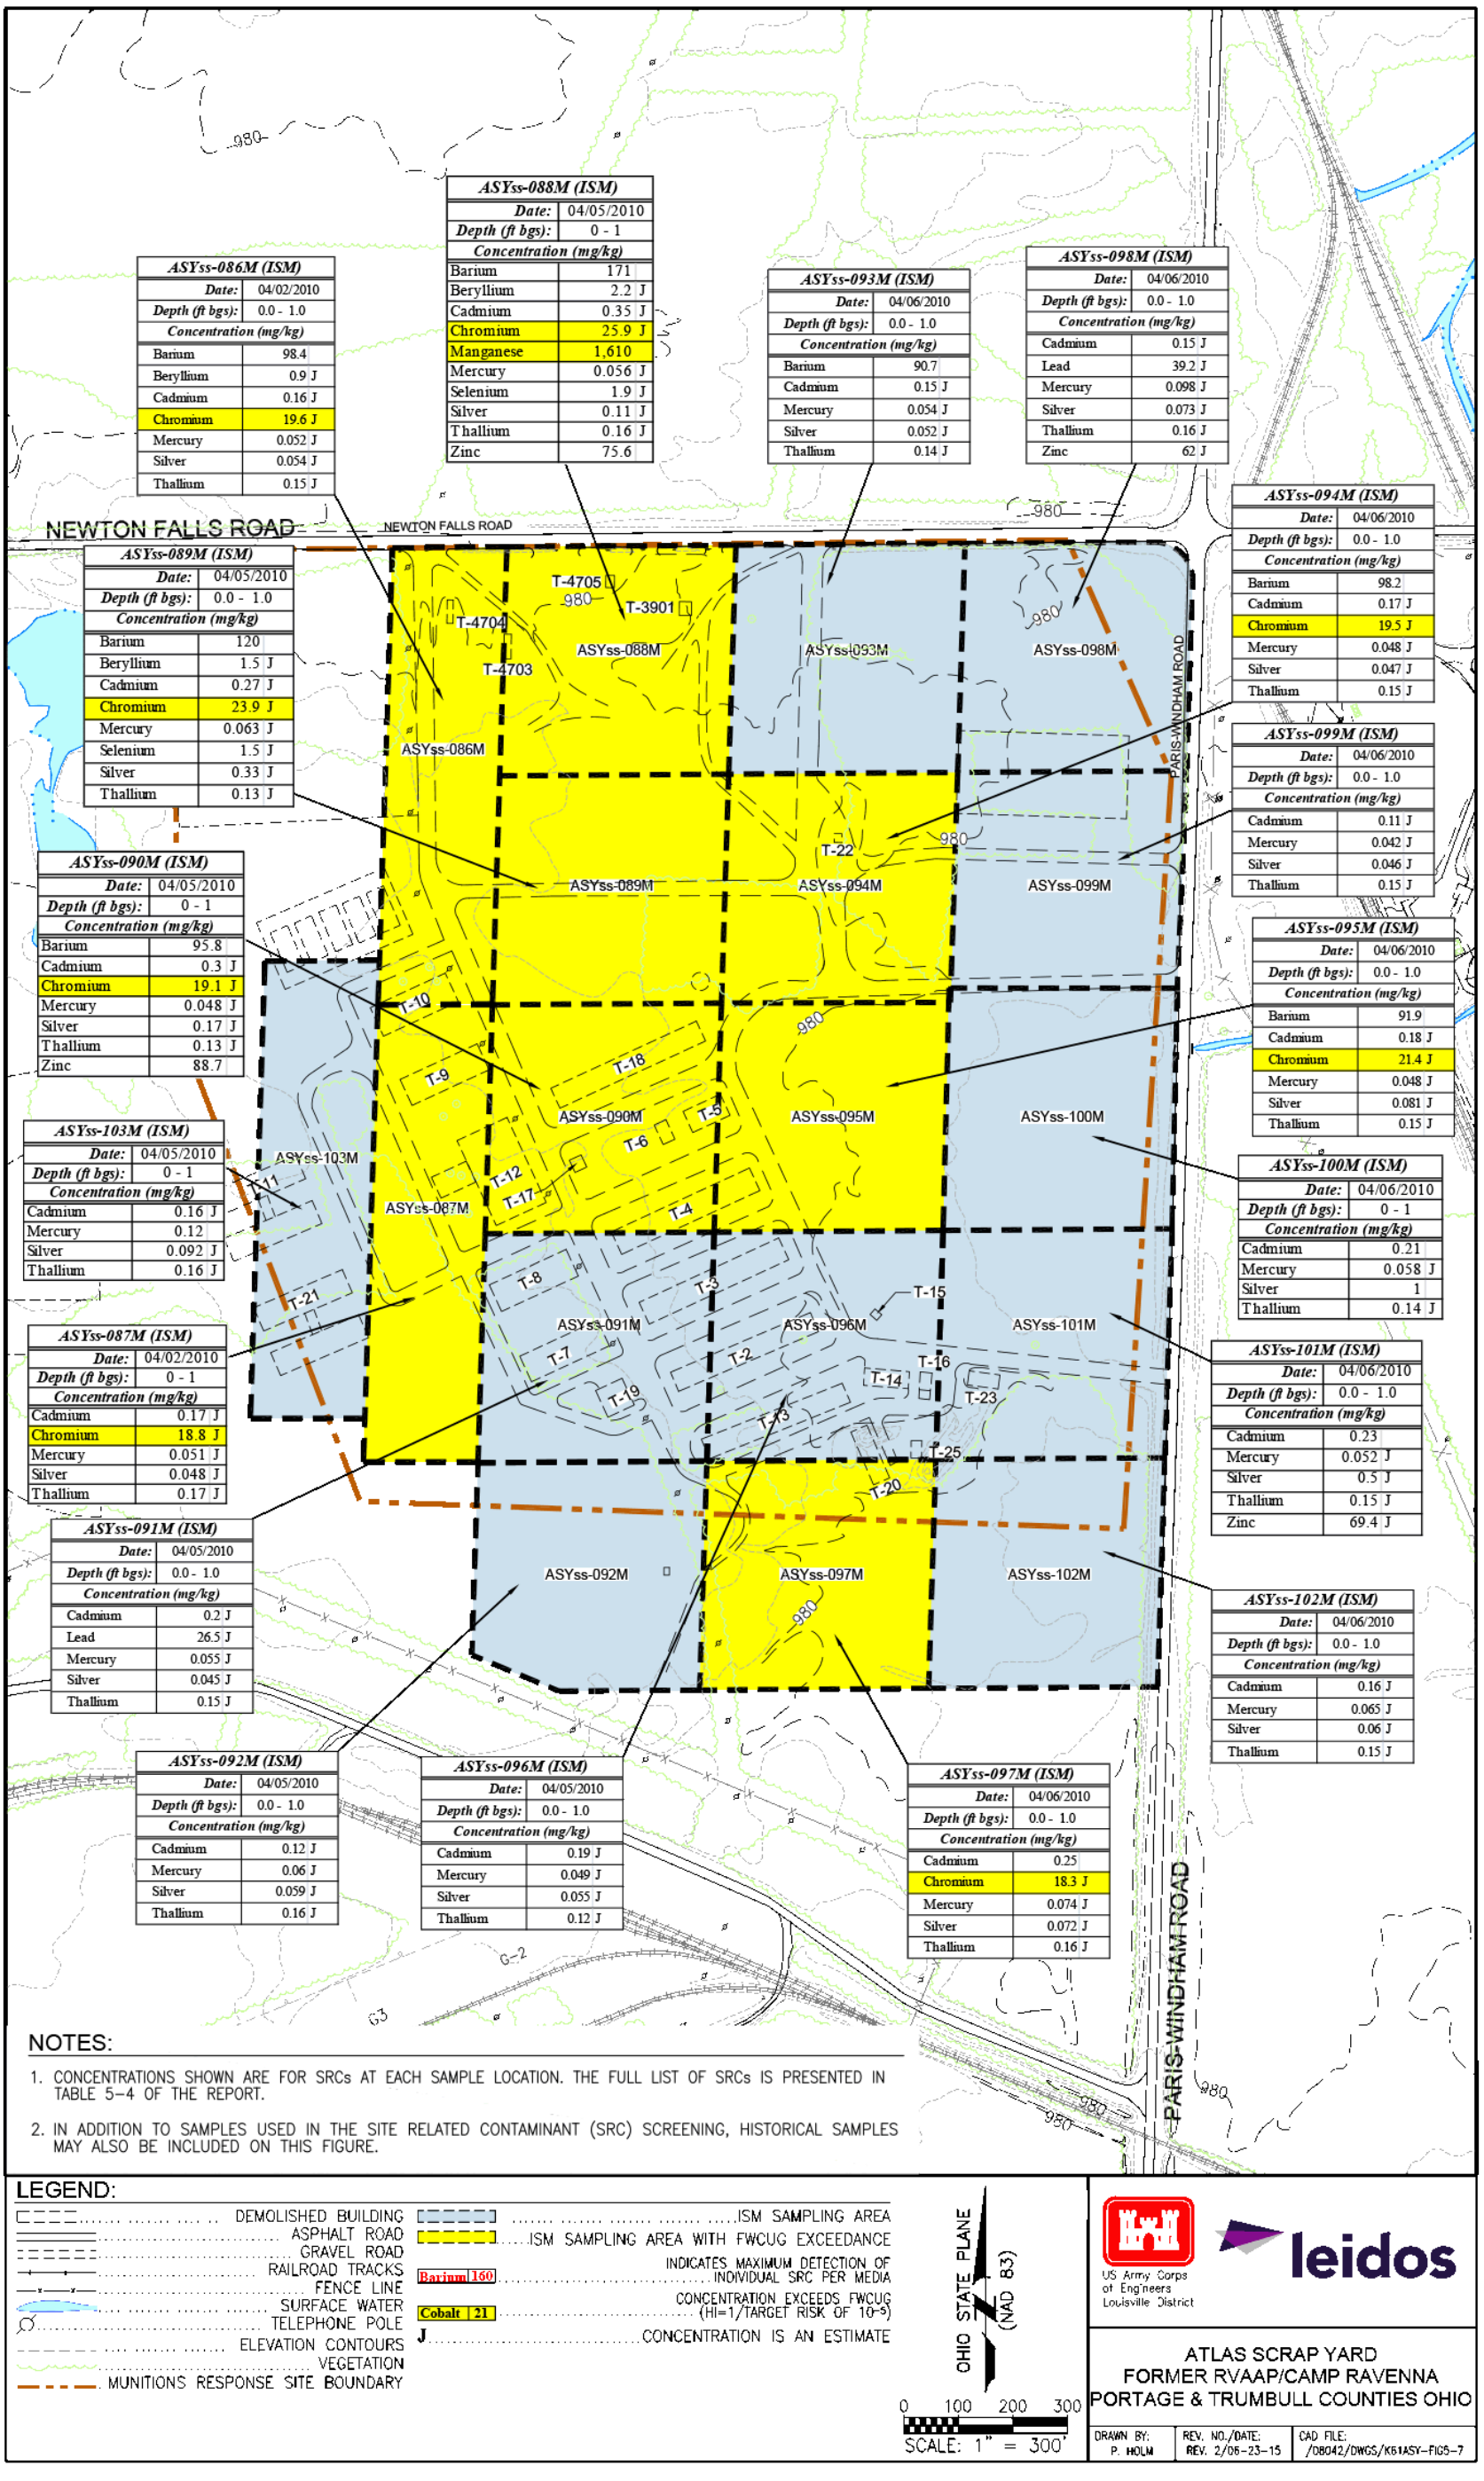


Figure 5–7. Concentrations of Inorganic SRCs in Grid ISM Surface Soil Samples

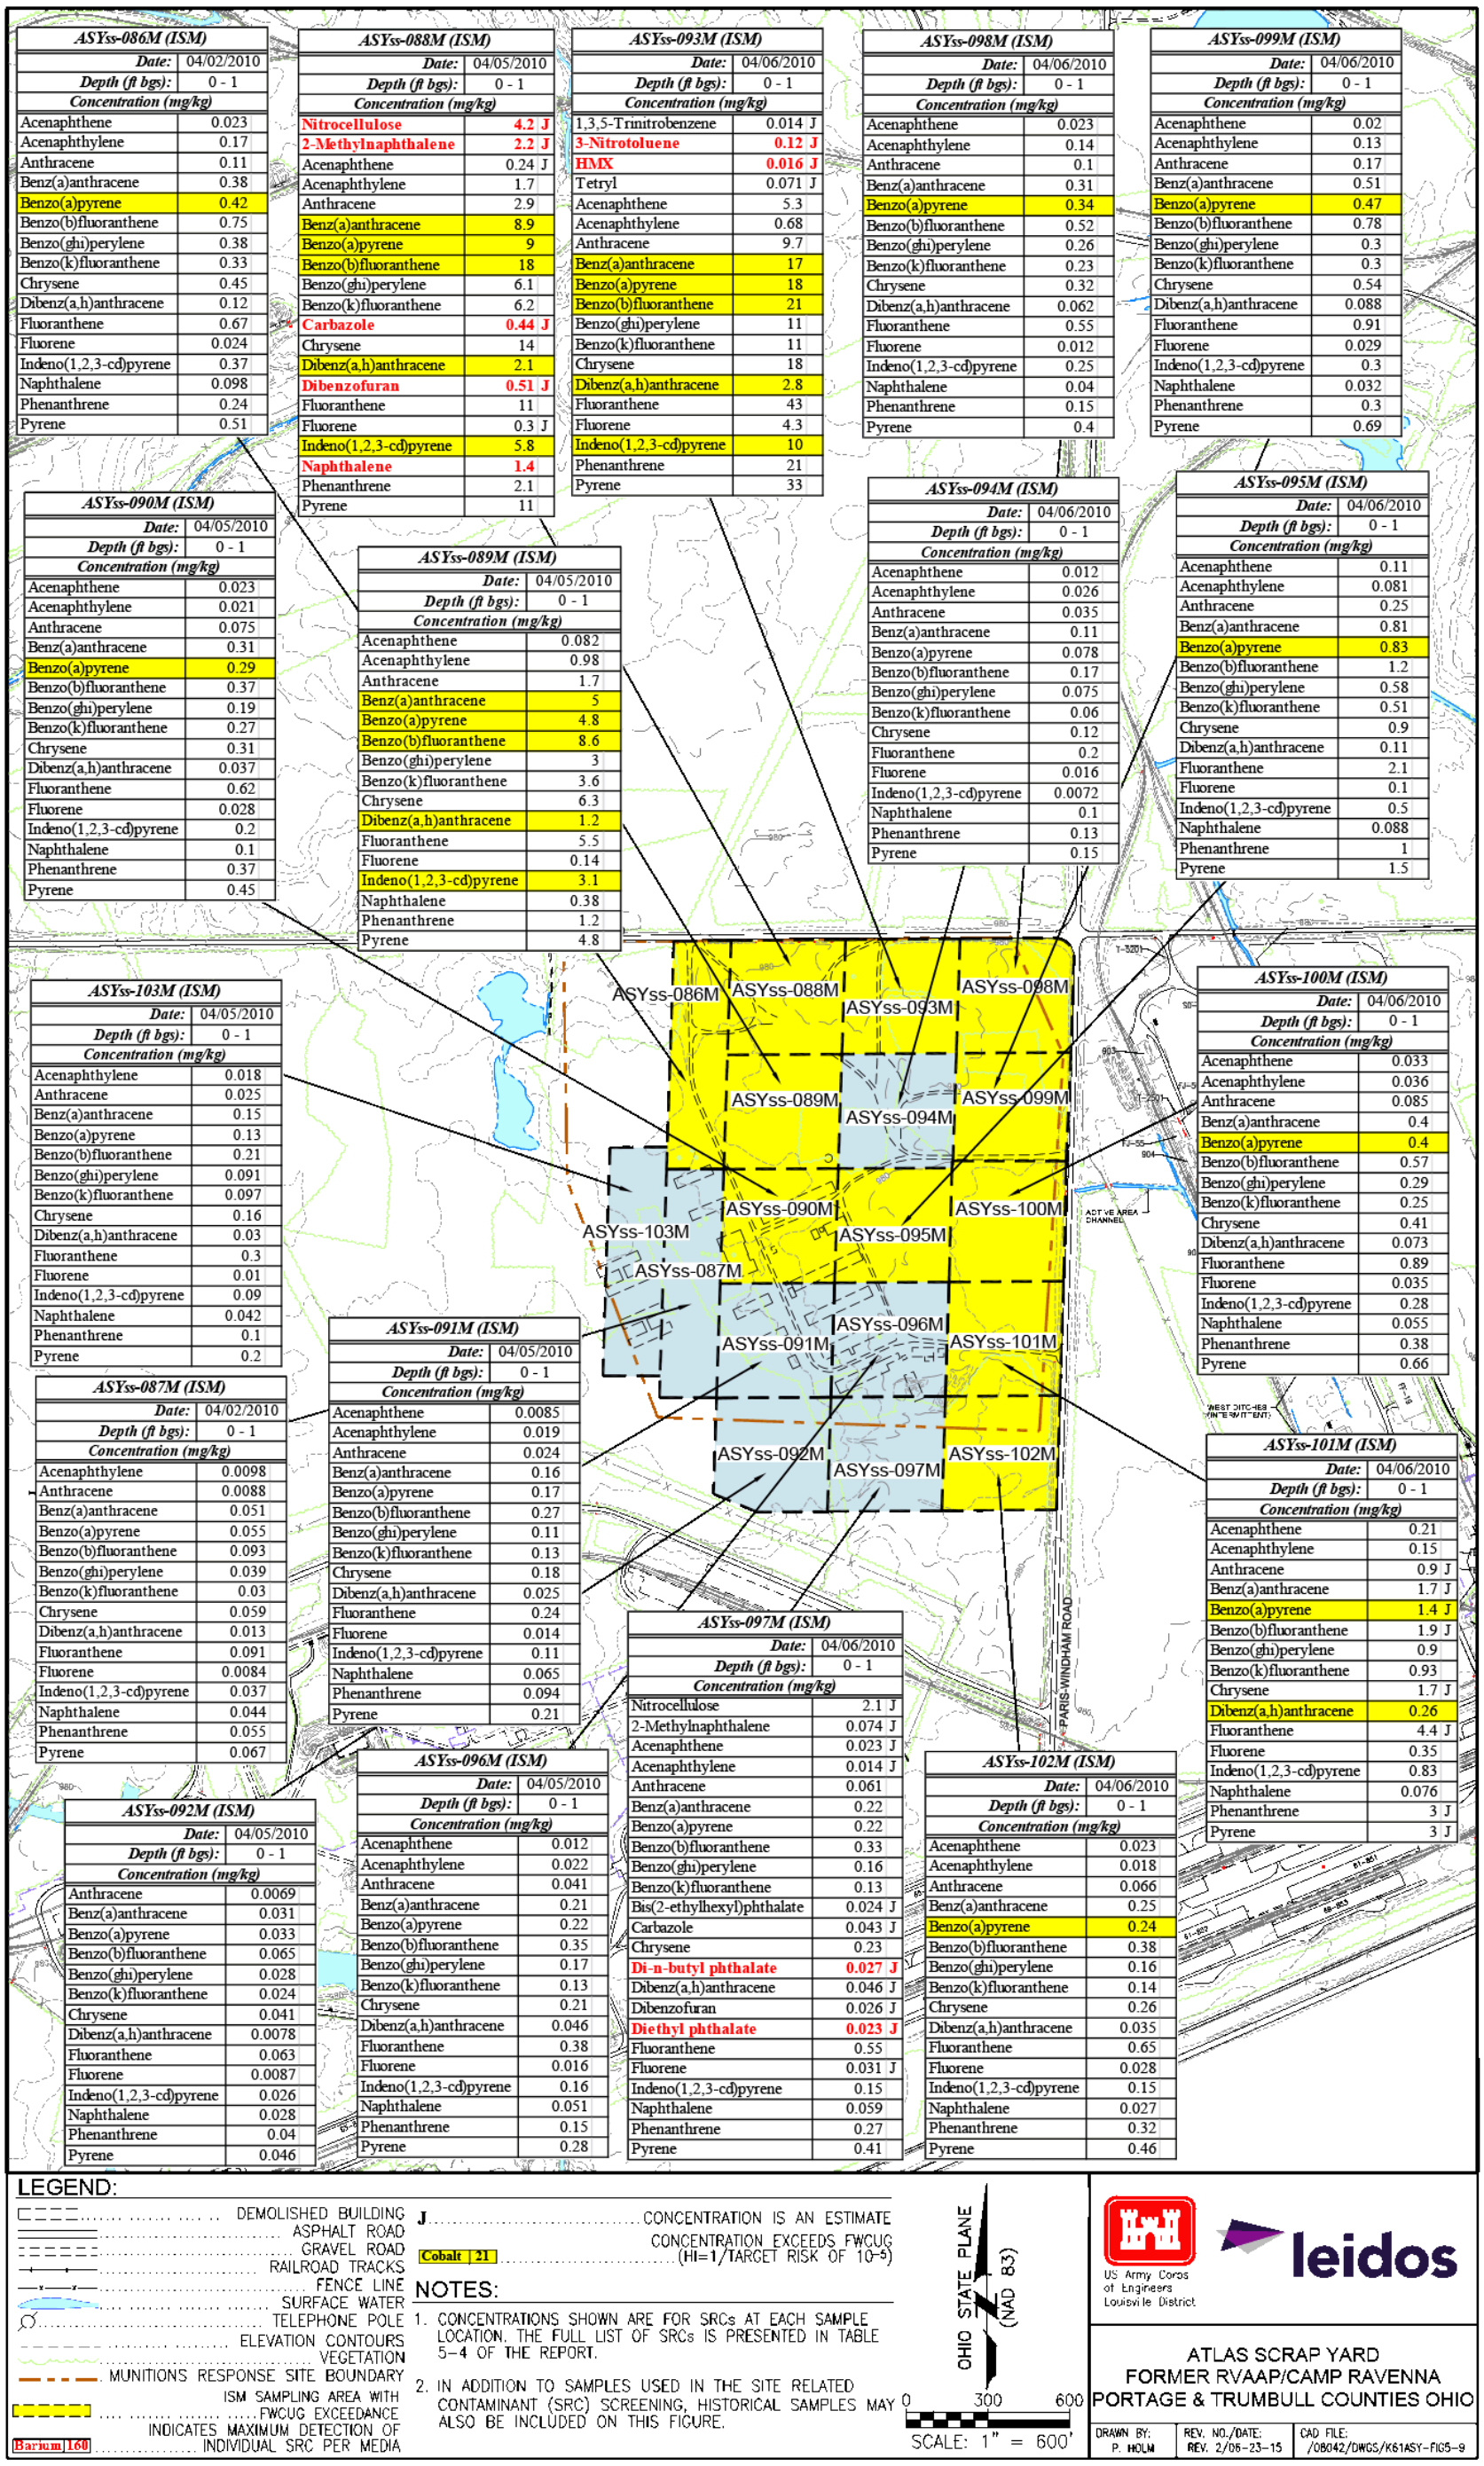


Figure 5–8. Concentrations of Organic SRCs in Grid ISM Surface Soil Samples


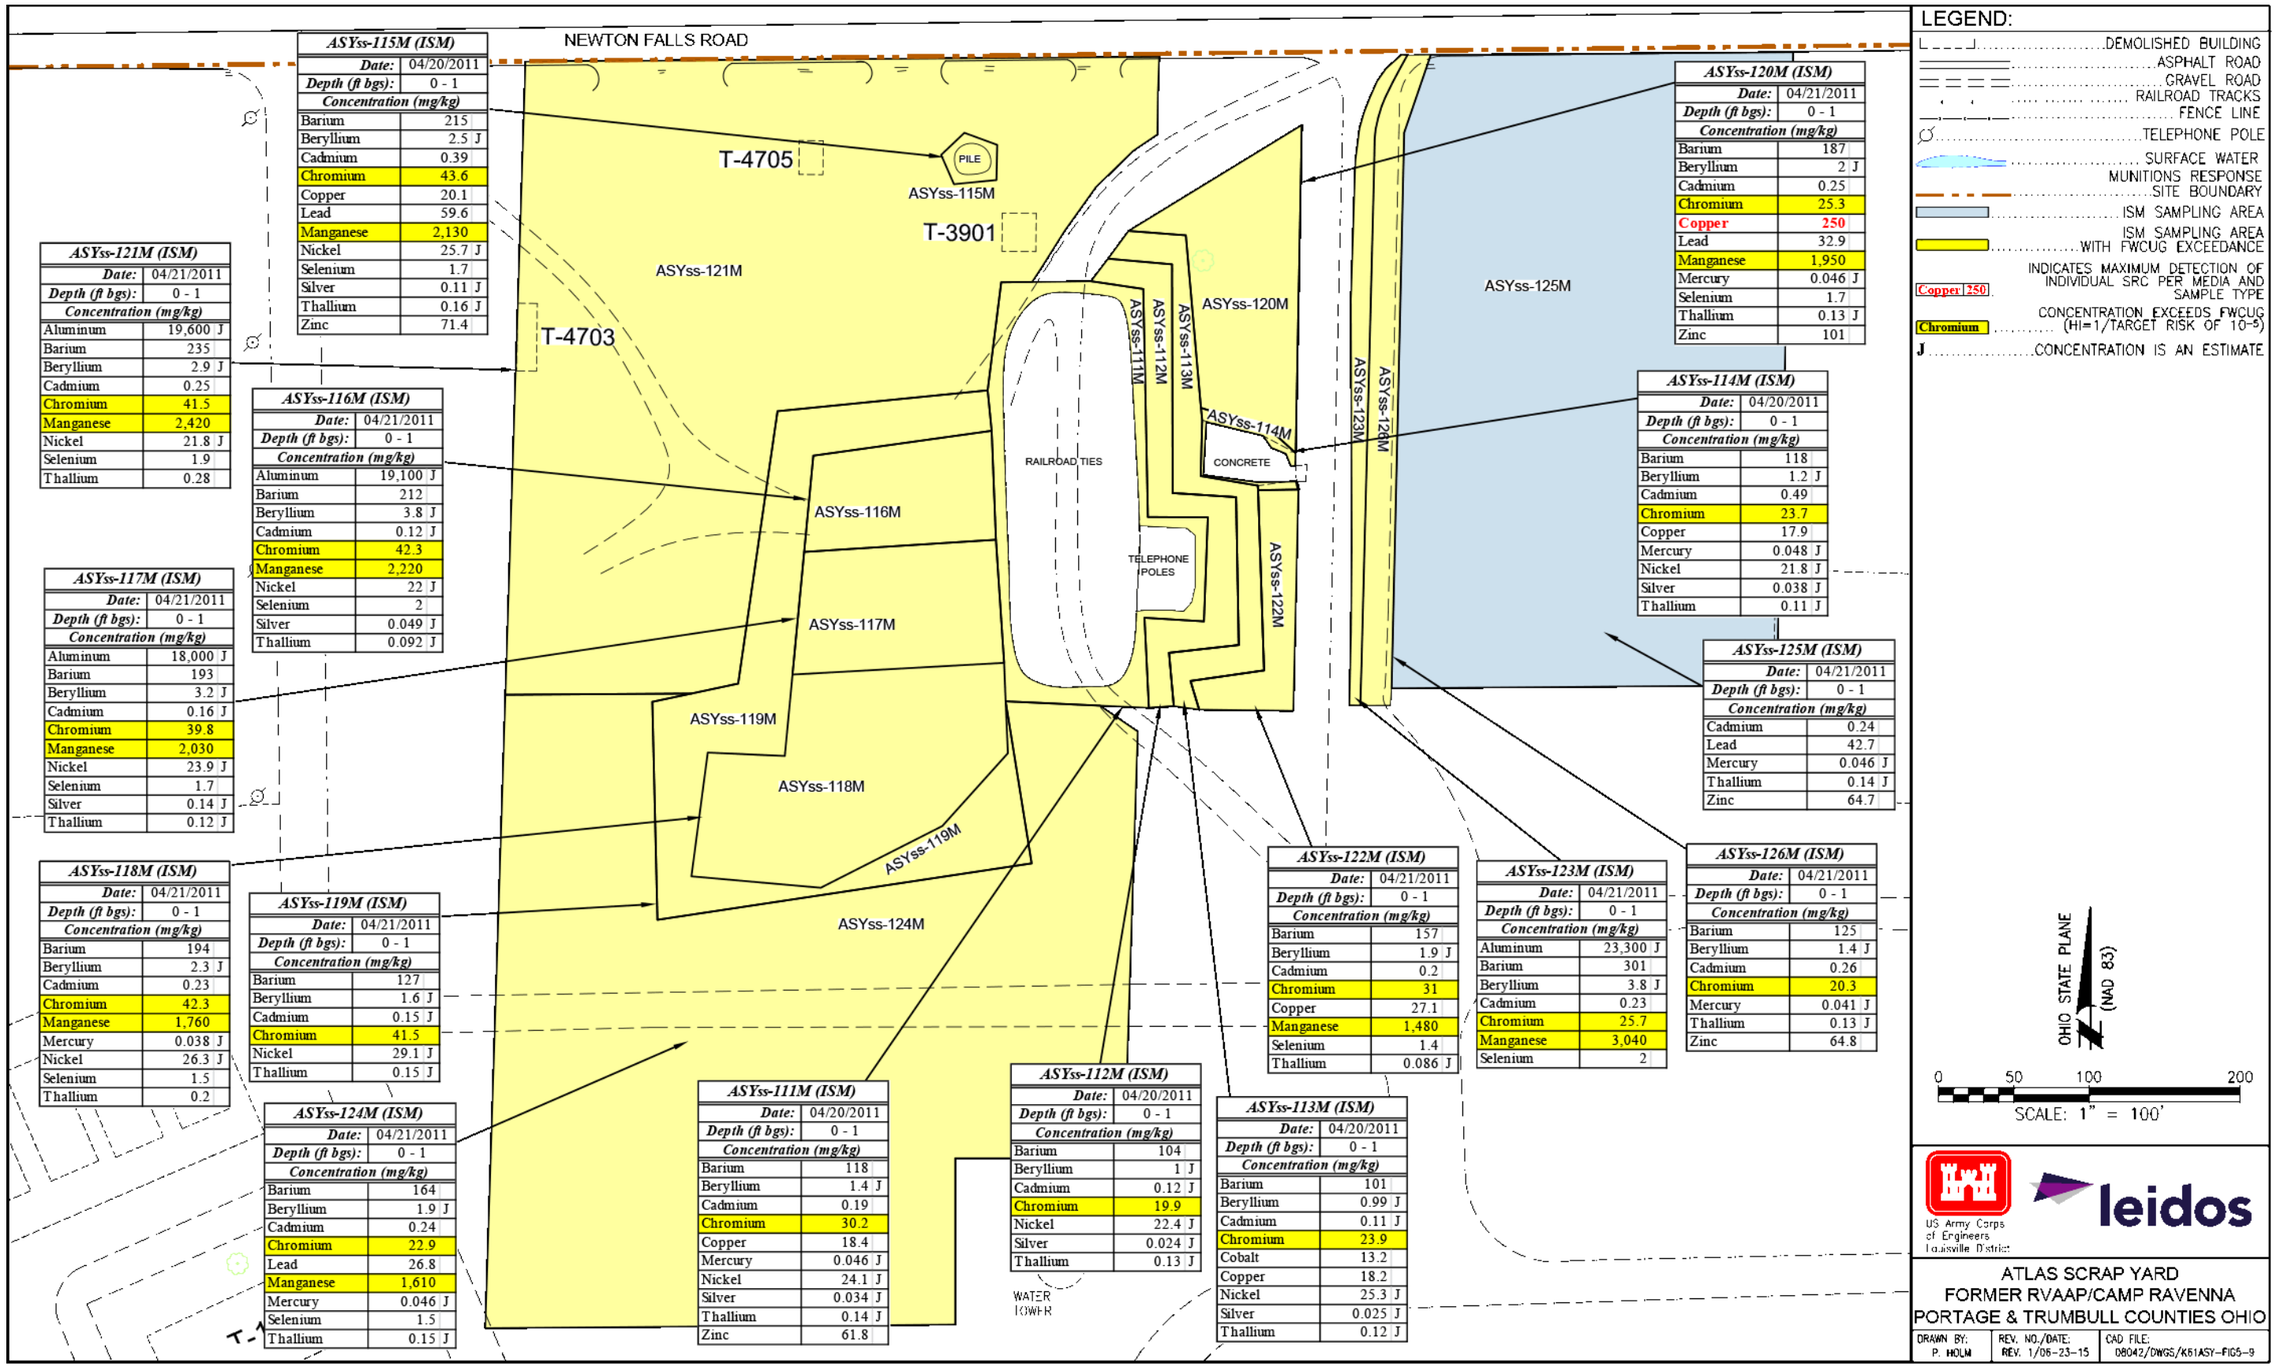


Figure 5–9. Concentrations of Inorganic SRCs in Active Storage Area ISM Surface Soil Samples

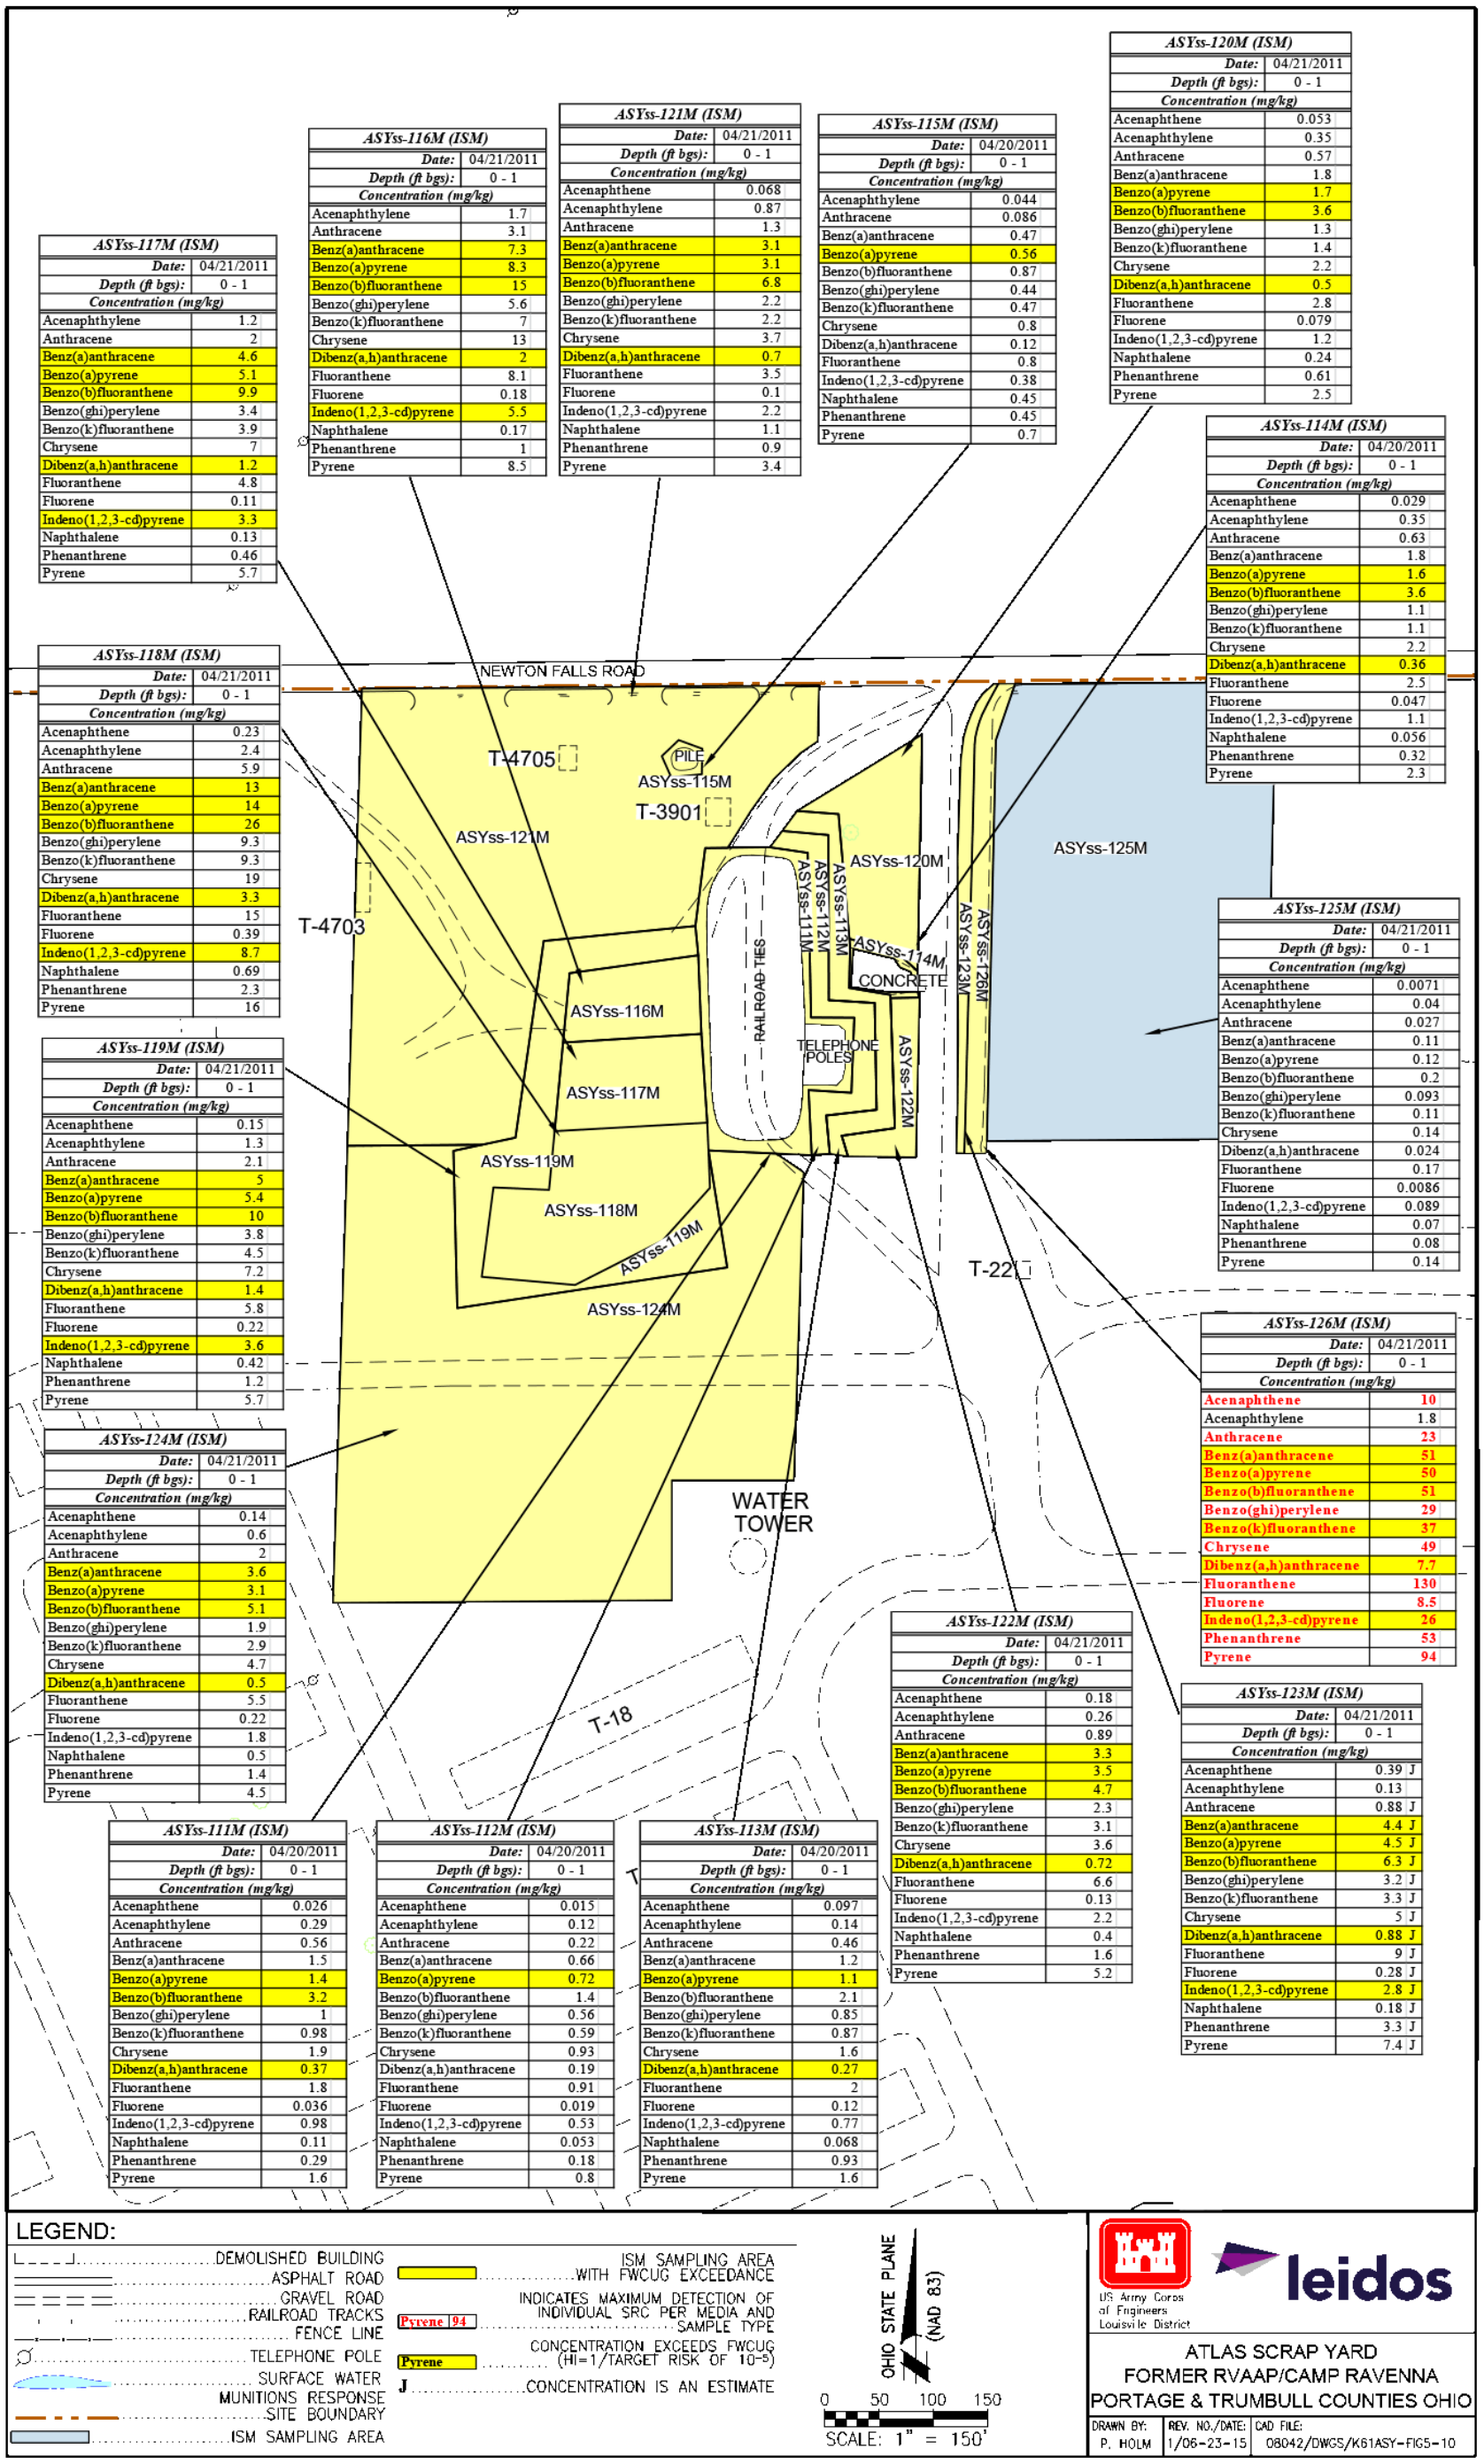

ASYss-117M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthylene	1.2
Anthracene	2
Benz(a)anthracene	4.6
Benzo(a)pyrene	5.1
Benzo(b)fluoranthene	9.9
Benzo(ghi)perylene	3.4
Benzo(k)fluoranthene	3.9
Chrysene	7
Dibenz(a,h)anthracene	1.2
Fluoranthene	4.8
Fluorene	0.11
Indeno(1,2,3-cd)pyrene	3.3
Naphthalene	0.13
Phenanthrene	0.46
Pyrene	5.7

ASYss-116M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthylene	1.7
Anthracene	3.1
Benz(a)anthracene	7.3
Benzo(a)pyrene	8.3
Benzo(b)fluoranthene	15
Benzo(ghi)perylene	5.6
Benzo(k)fluoranthene	7
Chrysene	13
Dibenz(a,h)anthracene	2
Fluoranthene	8.1
Fluorene	0.18
Indeno(1,2,3-cd)pyrene	5.5
Naphthalene	0.17
Phenanthrene	1
Pyrene	8.5

ASYss-121M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.068
Acenaphthylene	0.87
Anthracene	1.3
Benz(a)anthracene	3.1
Benzo(a)pyrene	3.1
Benzo(b)fluoranthene	6.8
Benzo(ghi)perylene	2.2
Benzo(k)fluoranthene	2.2
Chrysene	3.7
Dibenz(a,h)anthracene	0.7
Fluoranthene	3.5
Fluorene	0.1
Indeno(1,2,3-cd)pyrene	2.2
Naphthalene	1.1
Phenanthrene	0.9
Pyrene	3.4

ASYss-115M (ISM)	
Date:	04/20/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthylene	0.044
Anthracene	0.086
Benz(a)anthracene	0.47
Benzo(a)pyrene	0.56
Benzo(b)fluoranthene	0.87
Benzo(ghi)perylene	0.44
Benzo(k)fluoranthene	0.47
Chrysene	0.8
Dibenz(a,h)anthracene	0.12
Fluoranthene	0.8
Indeno(1,2,3-cd)pyrene	0.38
Naphthalene	0.45
Phenanthrene	0.45
Pyrene	0.7

ASYss-120M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.053
Acenaphthylene	0.35
Anthracene	0.57
Benz(a)anthracene	1.8
Benzo(a)pyrene	1.7
Benzo(b)fluoranthene	3.6
Benzo(ghi)perylene	1.3
Benzo(k)fluoranthene	1.4
Chrysene	2.2
Dibenz(a,h)anthracene	0.5
Fluoranthene	2.8
Fluorene	0.079
Indeno(1,2,3-cd)pyrene	1.2
Naphthalene	0.24
Phenanthrene	0.61
Pyrene	2.5

ASYss-114M (ISM)	
Date:	04/20/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.029
Acenaphthylene	0.35
Anthracene	0.63
Benz(a)anthracene	1.8
Benzo(a)pyrene	1.6
Benzo(b)fluoranthene	3.6
Benzo(ghi)perylene	1.1
Benzo(k)fluoranthene	1.1
Chrysene	2.2
Dibenz(a,h)anthracene	0.36
Fluoranthene	2.5
Fluorene	0.047
Indeno(1,2,3-cd)pyrene	1.1
Naphthalene	0.056
Phenanthrene	0.32
Pyrene	2.3

ASYss-118M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.23
Acenaphthylene	2.4
Anthracene	5.9
Benz(a)anthracene	13
Benzo(a)pyrene	14
Benzo(b)fluoranthene	26
Benzo(ghi)perylene	9.3
Benzo(k)fluoranthene	9.3
Chrysene	19
Dibenz(a,h)anthracene	3.3
Fluoranthene	15
Fluorene	0.39
Indeno(1,2,3-cd)pyrene	8.7
Naphthalene	0.69
Phenanthrene	2.3
Pyrene	16

ASYss-125M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.0071
Acenaphthylene	0.04
Anthracene	0.027
Benz(a)anthracene	0.11
Benzo(a)pyrene	0.12
Benzo(b)fluoranthene	0.2
Benzo(ghi)perylene	0.093
Benzo(k)fluoranthene	0.11
Chrysene	0.14
Dibenz(a,h)anthracene	0.024
Fluoranthene	0.17
Fluorene	0.0086
Indeno(1,2,3-cd)pyrene	0.089
Naphthalene	0.07
Phenanthrene	0.08
Pyrene	0.14

ASYss-119M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.15
Acenaphthylene	1.3
Anthracene	2.1
Benz(a)anthracene	5
Benzo(a)pyrene	5.4
Benzo(b)fluoranthene	10
Benzo(ghi)perylene	3.8
Benzo(k)fluoranthene	4.5
Chrysene	7.2
Dibenz(a,h)anthracene	1.4
Fluoranthene	5.8
Fluorene	0.22
Indeno(1,2,3-cd)pyrene	3.6
Naphthalene	0.42
Phenanthrene	1.2
Pyrene	5.7

ASYss-126M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	10
Acenaphthylene	1.8
Anthracene	23
Benz(a)anthracene	51
Benzo(a)pyrene	50
Benzo(b)fluoranthene	51
Benzo(ghi)perylene	29
Benzo(k)fluoranthene	37
Chrysene	49
Dibenz(a,h)anthracene	7.7
Fluoranthene	130
Fluorene	8.5
Indeno(1,2,3-cd)pyrene	26
Phenanthrene	53
Pyrene	94

ASYss-124M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.14
Acenaphthylene	0.6
Anthracene	2
Benz(a)anthracene	3.6
Benzo(a)pyrene	3.1
Benzo(b)fluoranthene	5.1
Benzo(ghi)perylene	1.9
Benzo(k)fluoranthene	2.9
Chrysene	4.7
Dibenz(a,h)anthracene	0.5
Fluoranthene	5.5
Fluorene	0.22
Indeno(1,2,3-cd)pyrene	1.8
Naphthalene	0.5
Phenanthrene	1.4
Pyrene	4.5

ASYss-122M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.18
Acenaphthylene	0.26
Anthracene	0.89
Benz(a)anthracene	3.3
Benzo(a)pyrene	3.5
Benzo(b)fluoranthene	4.7
Benzo(ghi)perylene	2.3
Benzo(k)fluoranthene	3.1
Chrysene	3.6
Dibenz(a,h)anthracene	0.72
Fluoranthene	6.6
Fluorene	0.13
Indeno(1,2,3-cd)pyrene	2.2
Naphthalene	0.4
Phenanthrene	1.6
Pyrene	5.2

ASYss-123M (ISM)	
Date:	04/21/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.39 J
Acenaphthylene	0.13
Anthracene	0.88 J
Benz(a)anthracene	4.4 J
Benzo(a)pyrene	4.5 J
Benzo(b)fluoranthene	6.3 J
Benzo(ghi)perylene	3.2 J
Benzo(k)fluoranthene	3.3 J
Chrysene	5 J
Dibenz(a,h)anthracene	0.88 J
Fluoranthene	9 J
Fluorene	0.28 J
Indeno(1,2,3-cd)pyrene	2.8 J
Naphthalene	0.18 J
Phenanthrene	3.3 J
Pyrene	7.4 J

ASYss-111M (ISM)	
Date:	04/20/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.026
Acenaphthylene	0.29
Anthracene	0.56
Benz(a)anthracene	1.5
Benzo(a)pyrene	1.4
Benzo(b)fluoranthene	3.2
Benzo(ghi)perylene	1
Benzo(k)fluoranthene	0.98
Chrysene	1.9
Dibenz(a,h)anthracene	0.37
Fluoranthene	1.8
Fluorene	0.036
Indeno(1,2,3-cd)pyrene	0.98
Naphthalene	0.11
Phenanthrene	0.29
Pyrene	1.6

ASYss-112M (ISM)	
Date:	04/20/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.015
Acenaphthylene	0.12
Anthracene	0.22
Benz(a)anthracene	0.66
Benzo(a)pyrene	0.72
Benzo(b)fluoranthene	1.4
Benzo(ghi)perylene	0.56
Benzo(k)fluoranthene	0.59
Chrysene	0.93
Dibenz(a,h)anthracene	0.19
Fluoranthene	0.91
Fluorene	0.019
Indeno(1,2,3-cd)pyrene	0.53
Naphthalene	0.053
Phenanthrene	0.18
Pyrene	0.8

ASYss-113M (ISM)	
Date:	04/20/2011
Depth (ft bgs):	0 - 1
Concentration (mg/kg)	
Acenaphthene	0.097
Acenaphthylene	0.14
Anthracene	0.46
Benz(a)anthracene	1.2
Benzo(a)pyrene	1.1
Benzo(b)fluoranthene	2.1
Benzo(ghi)perylene	0.85
Benzo(k)fluoranthene	0.87
Chrysene	1.6
Dibenz(a,h)anthracene	0.27
Fluoranthene	2
Fluorene	0.12
Indeno(1,2,3-cd)pyrene	0.77
Naphthalene	0.068
Phenanthrene	0.93
Pyrene	1.6

Figure 5–10. Concentrations of Organic SRCs in Active Storage Area ISM Surface Soil Samples

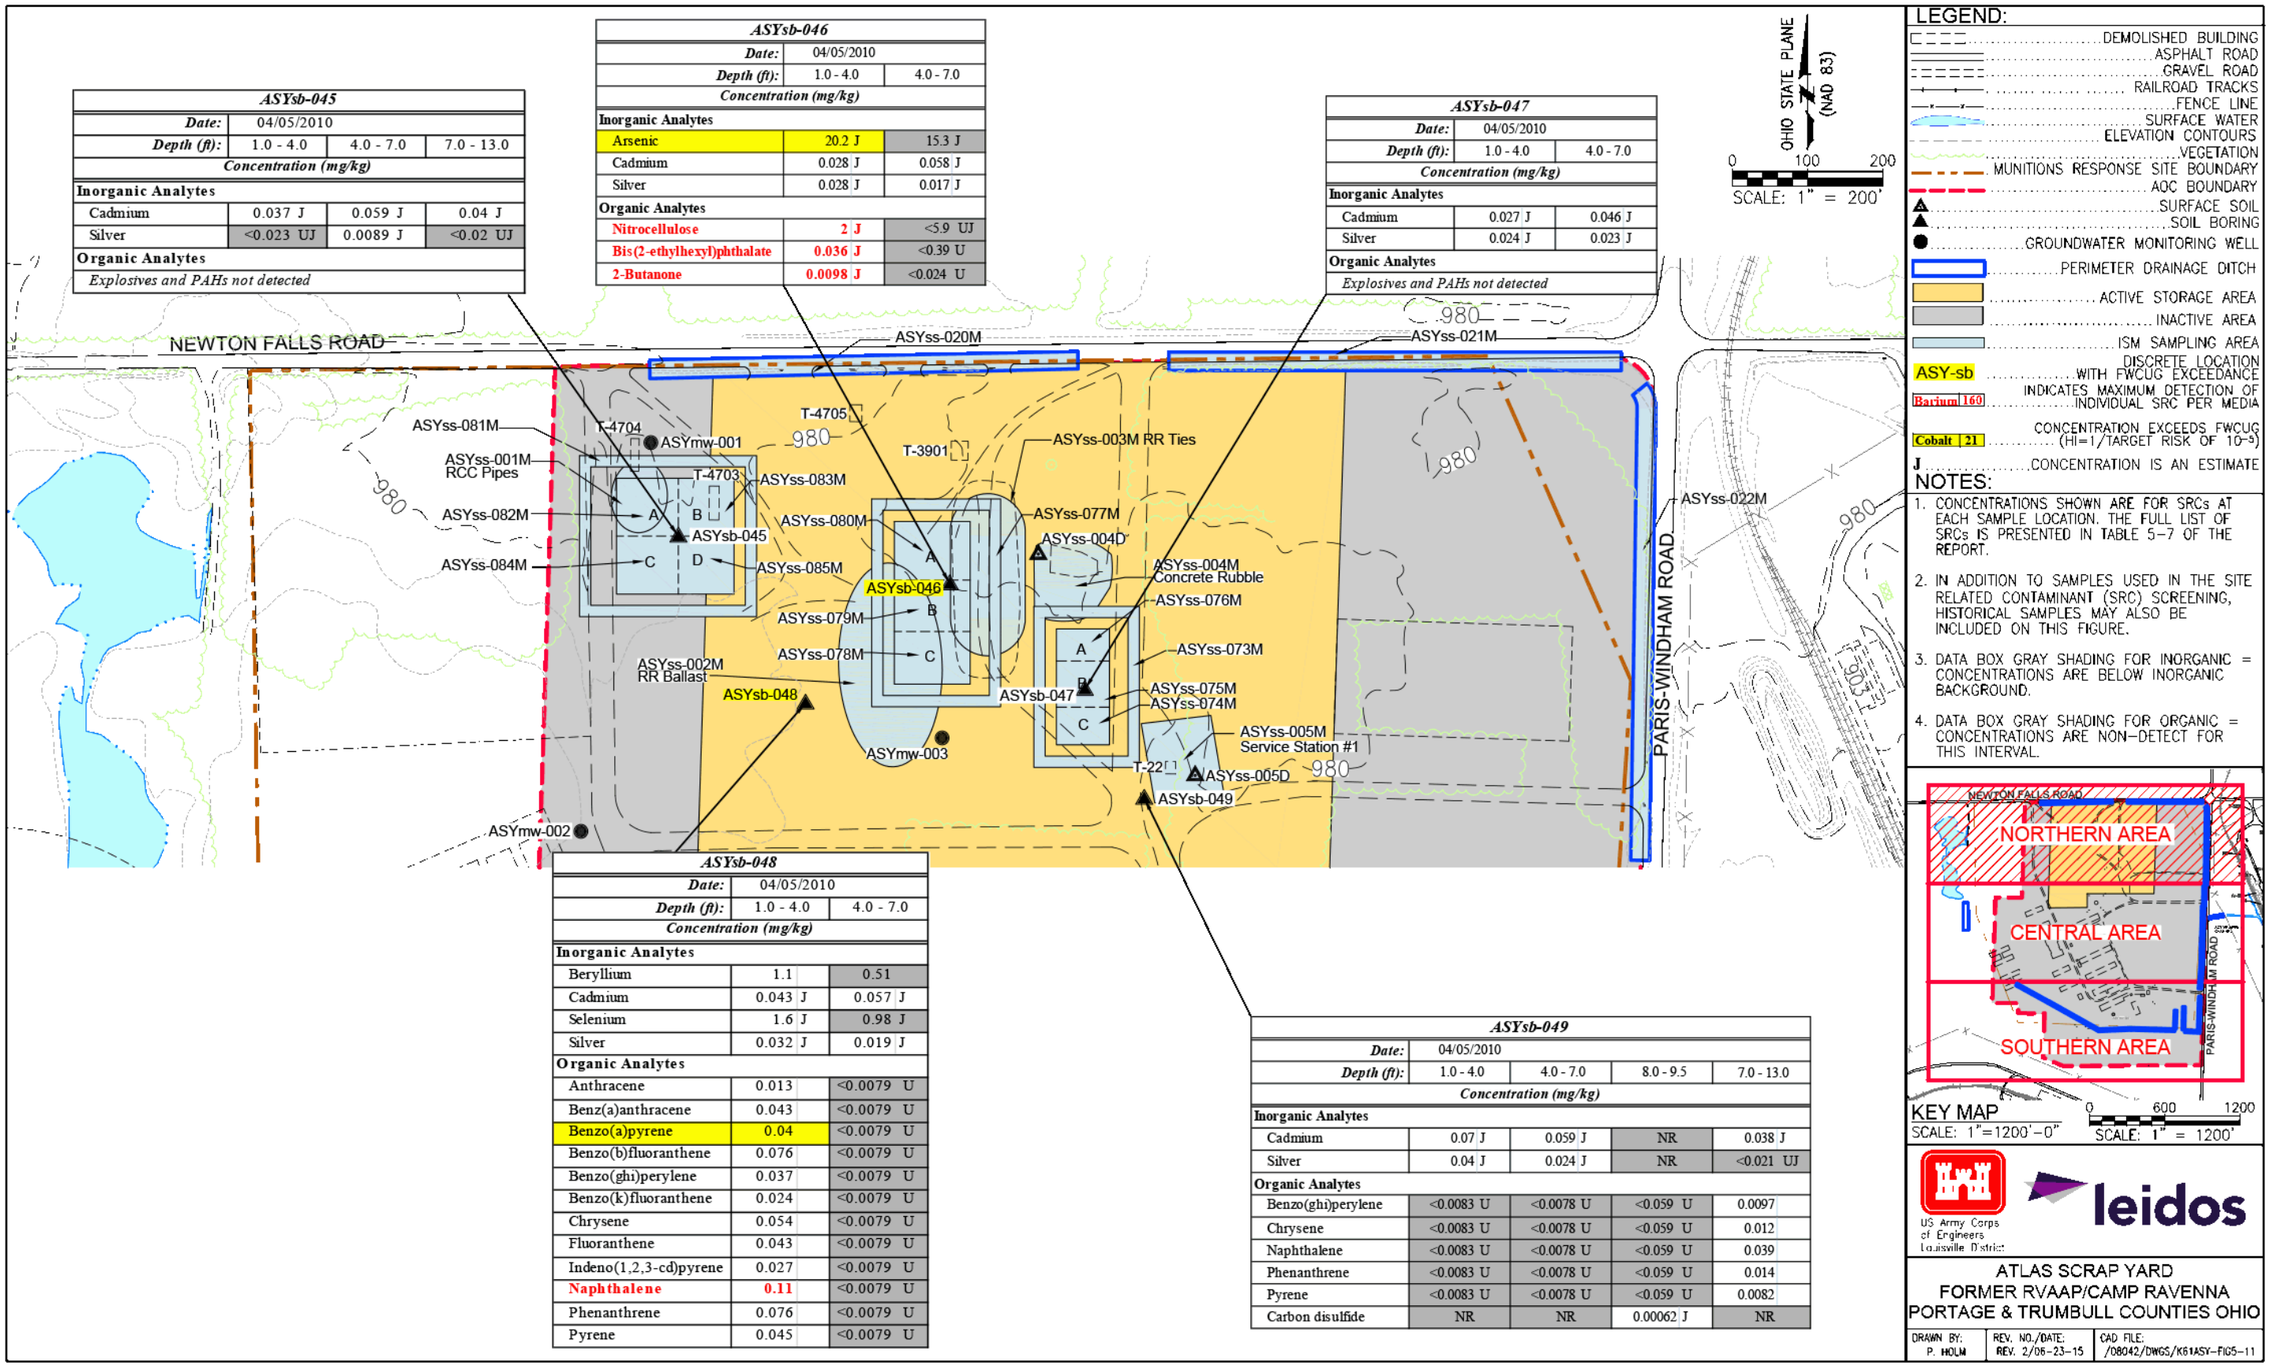


Figure 5–11. Concentrations of SRCs in Subsurface Soil Samples at the Northern Area

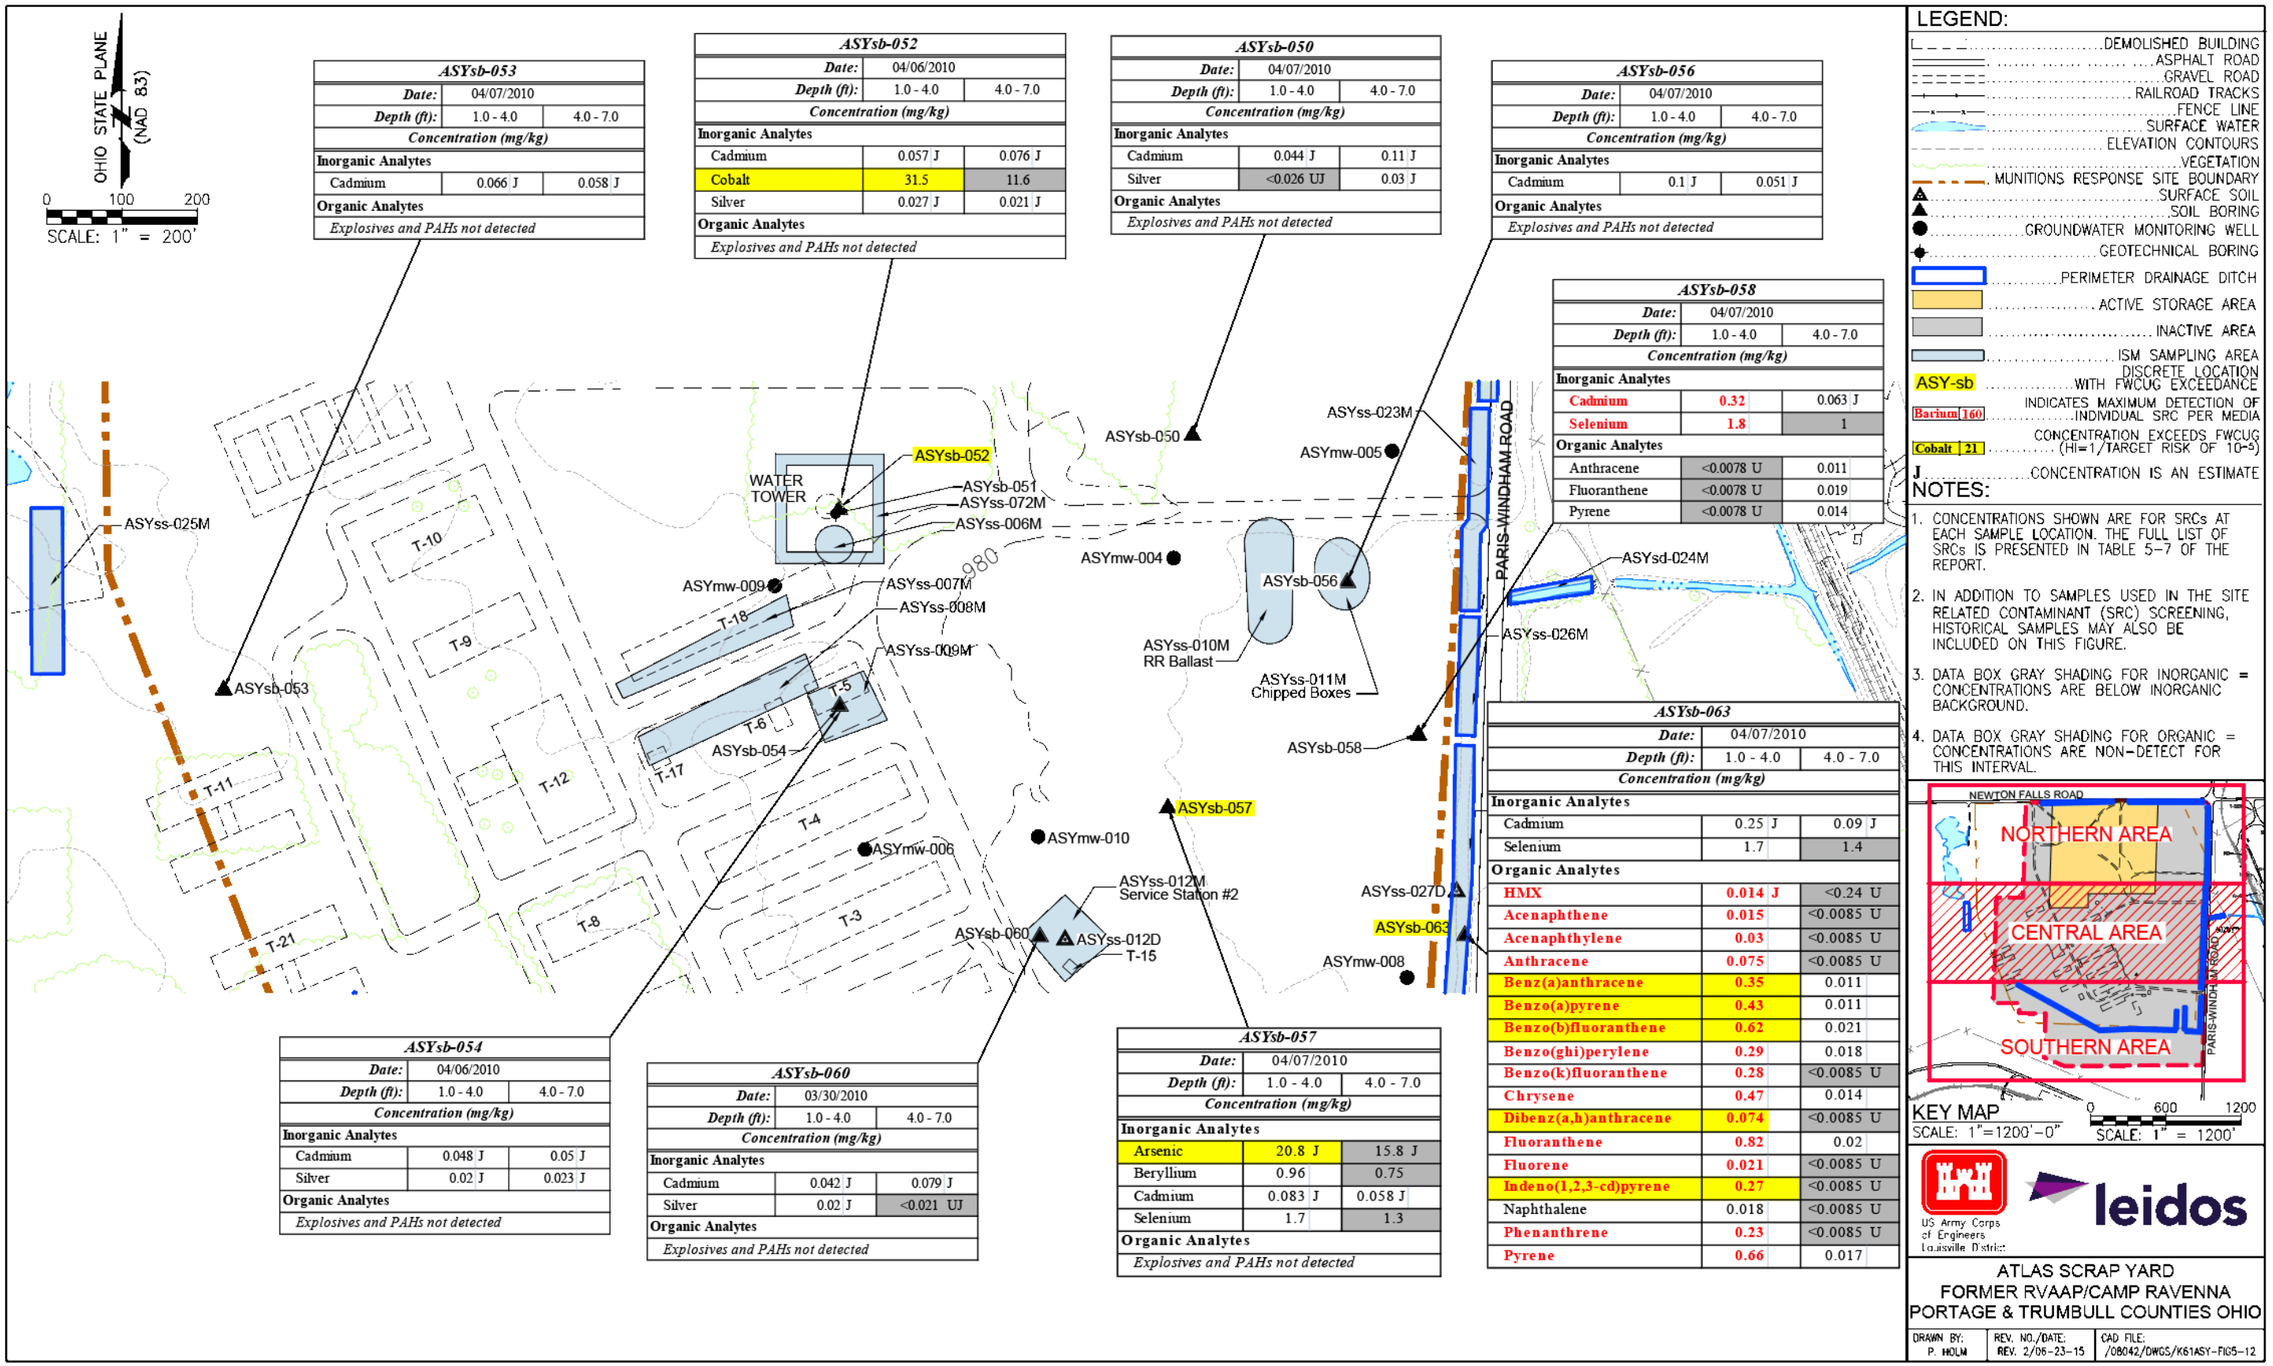


Figure 5–12. Concentrations of SRCs in Subsurface Soil Samples at the Central Area


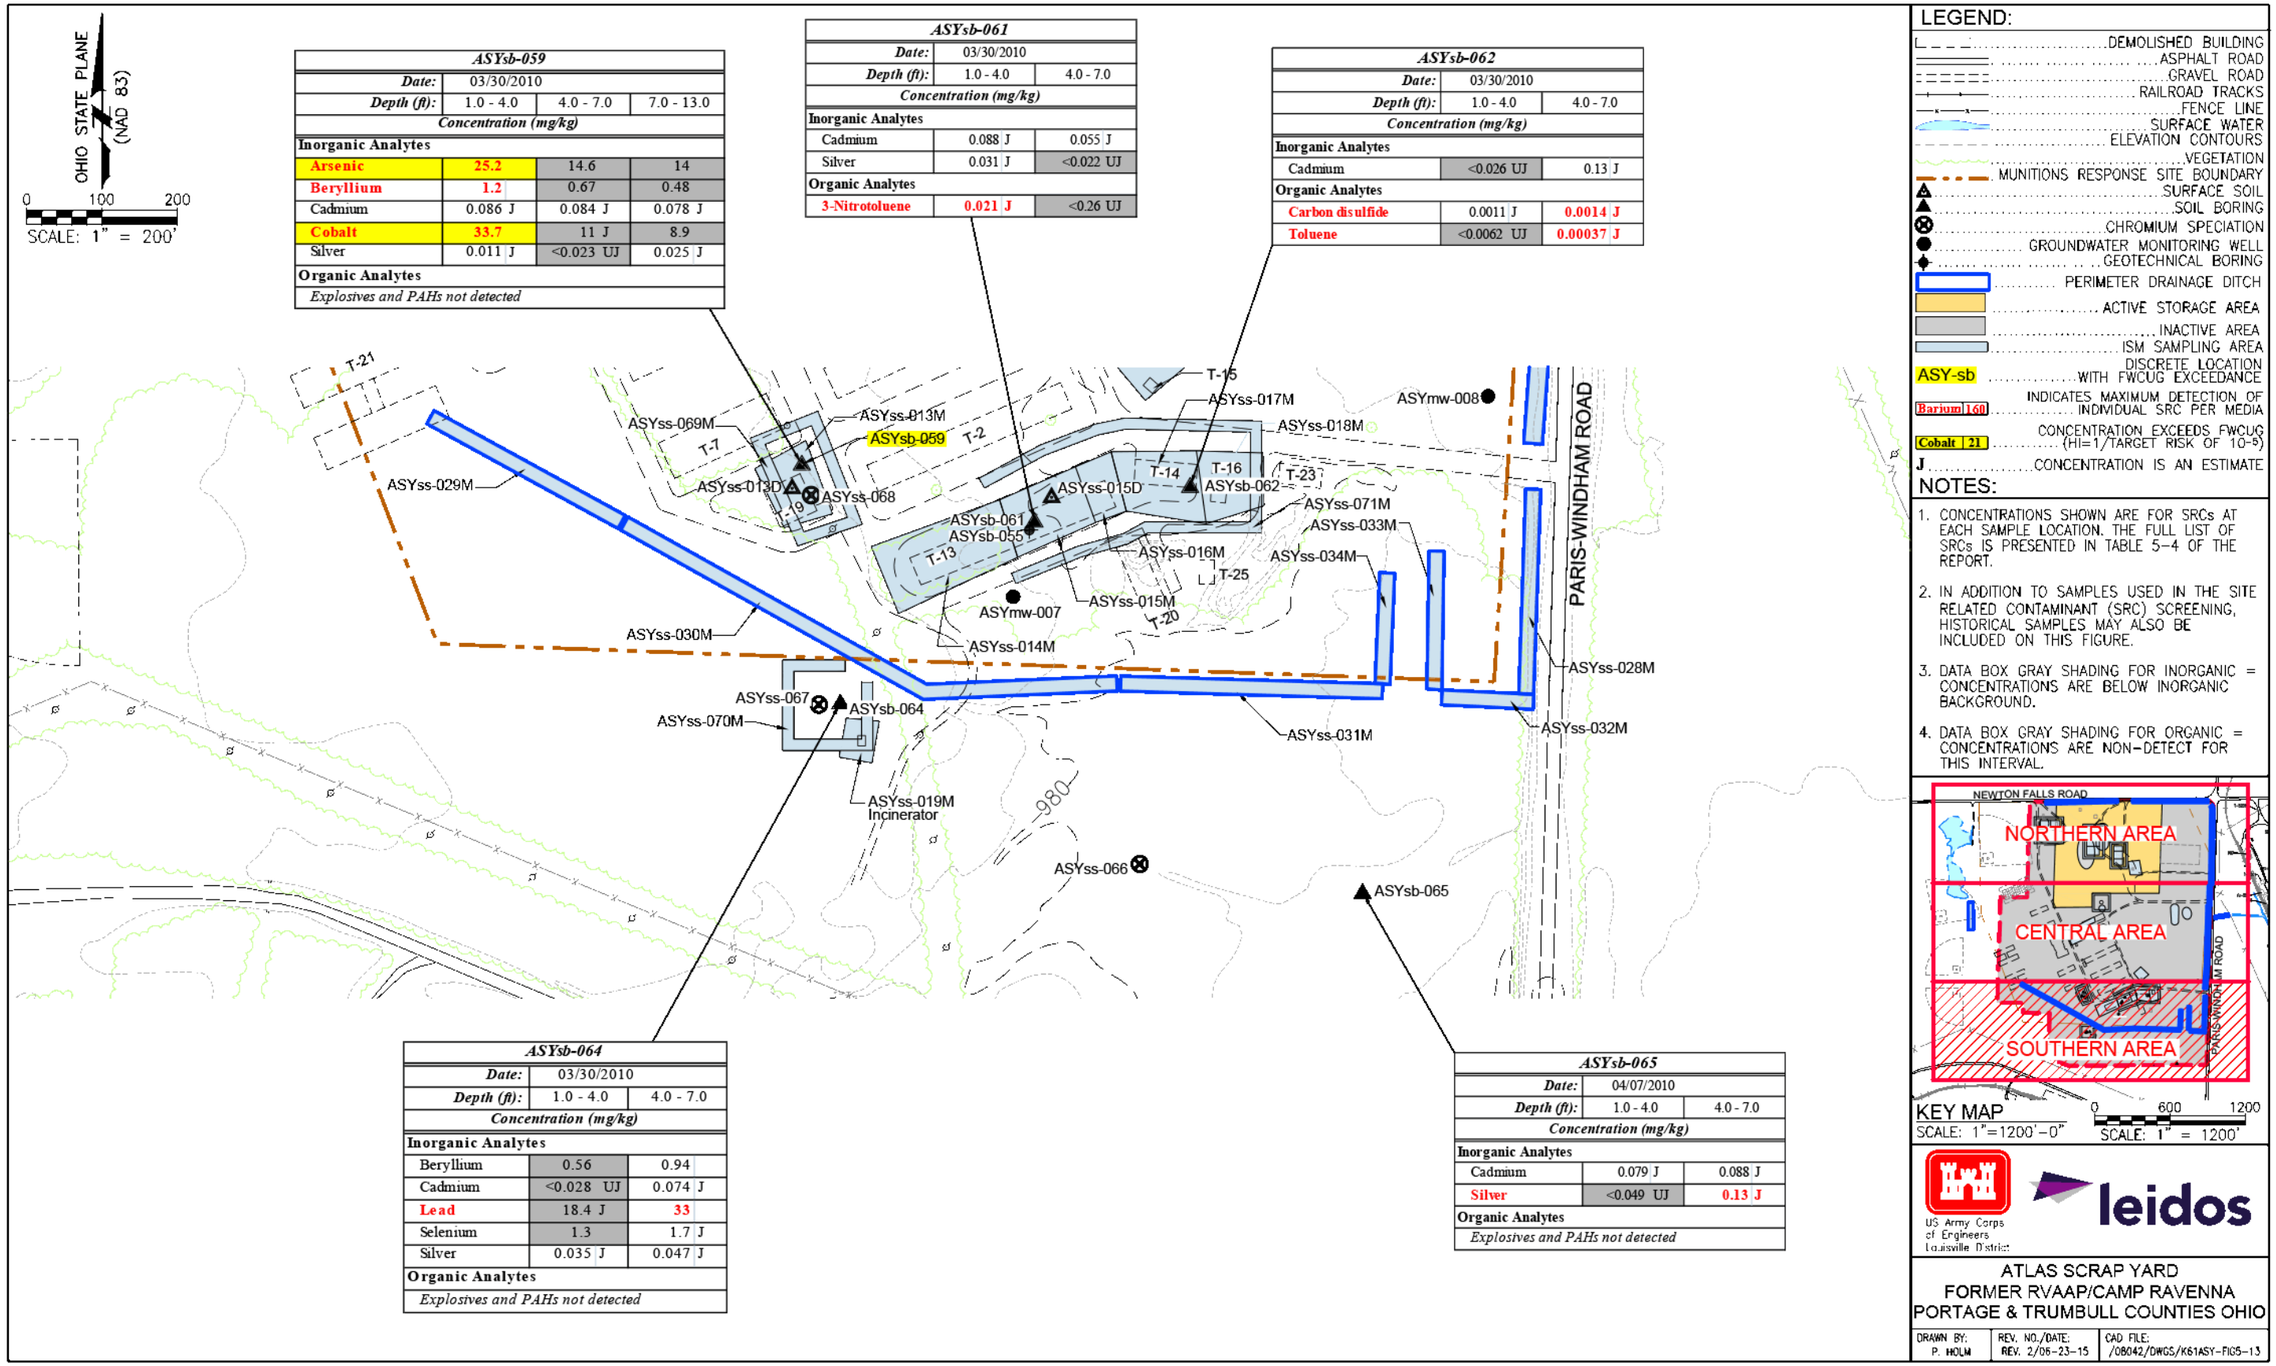


Figure 5–13. Concentrations of SRCs in Subsurface Soil Samples at the Southern Area

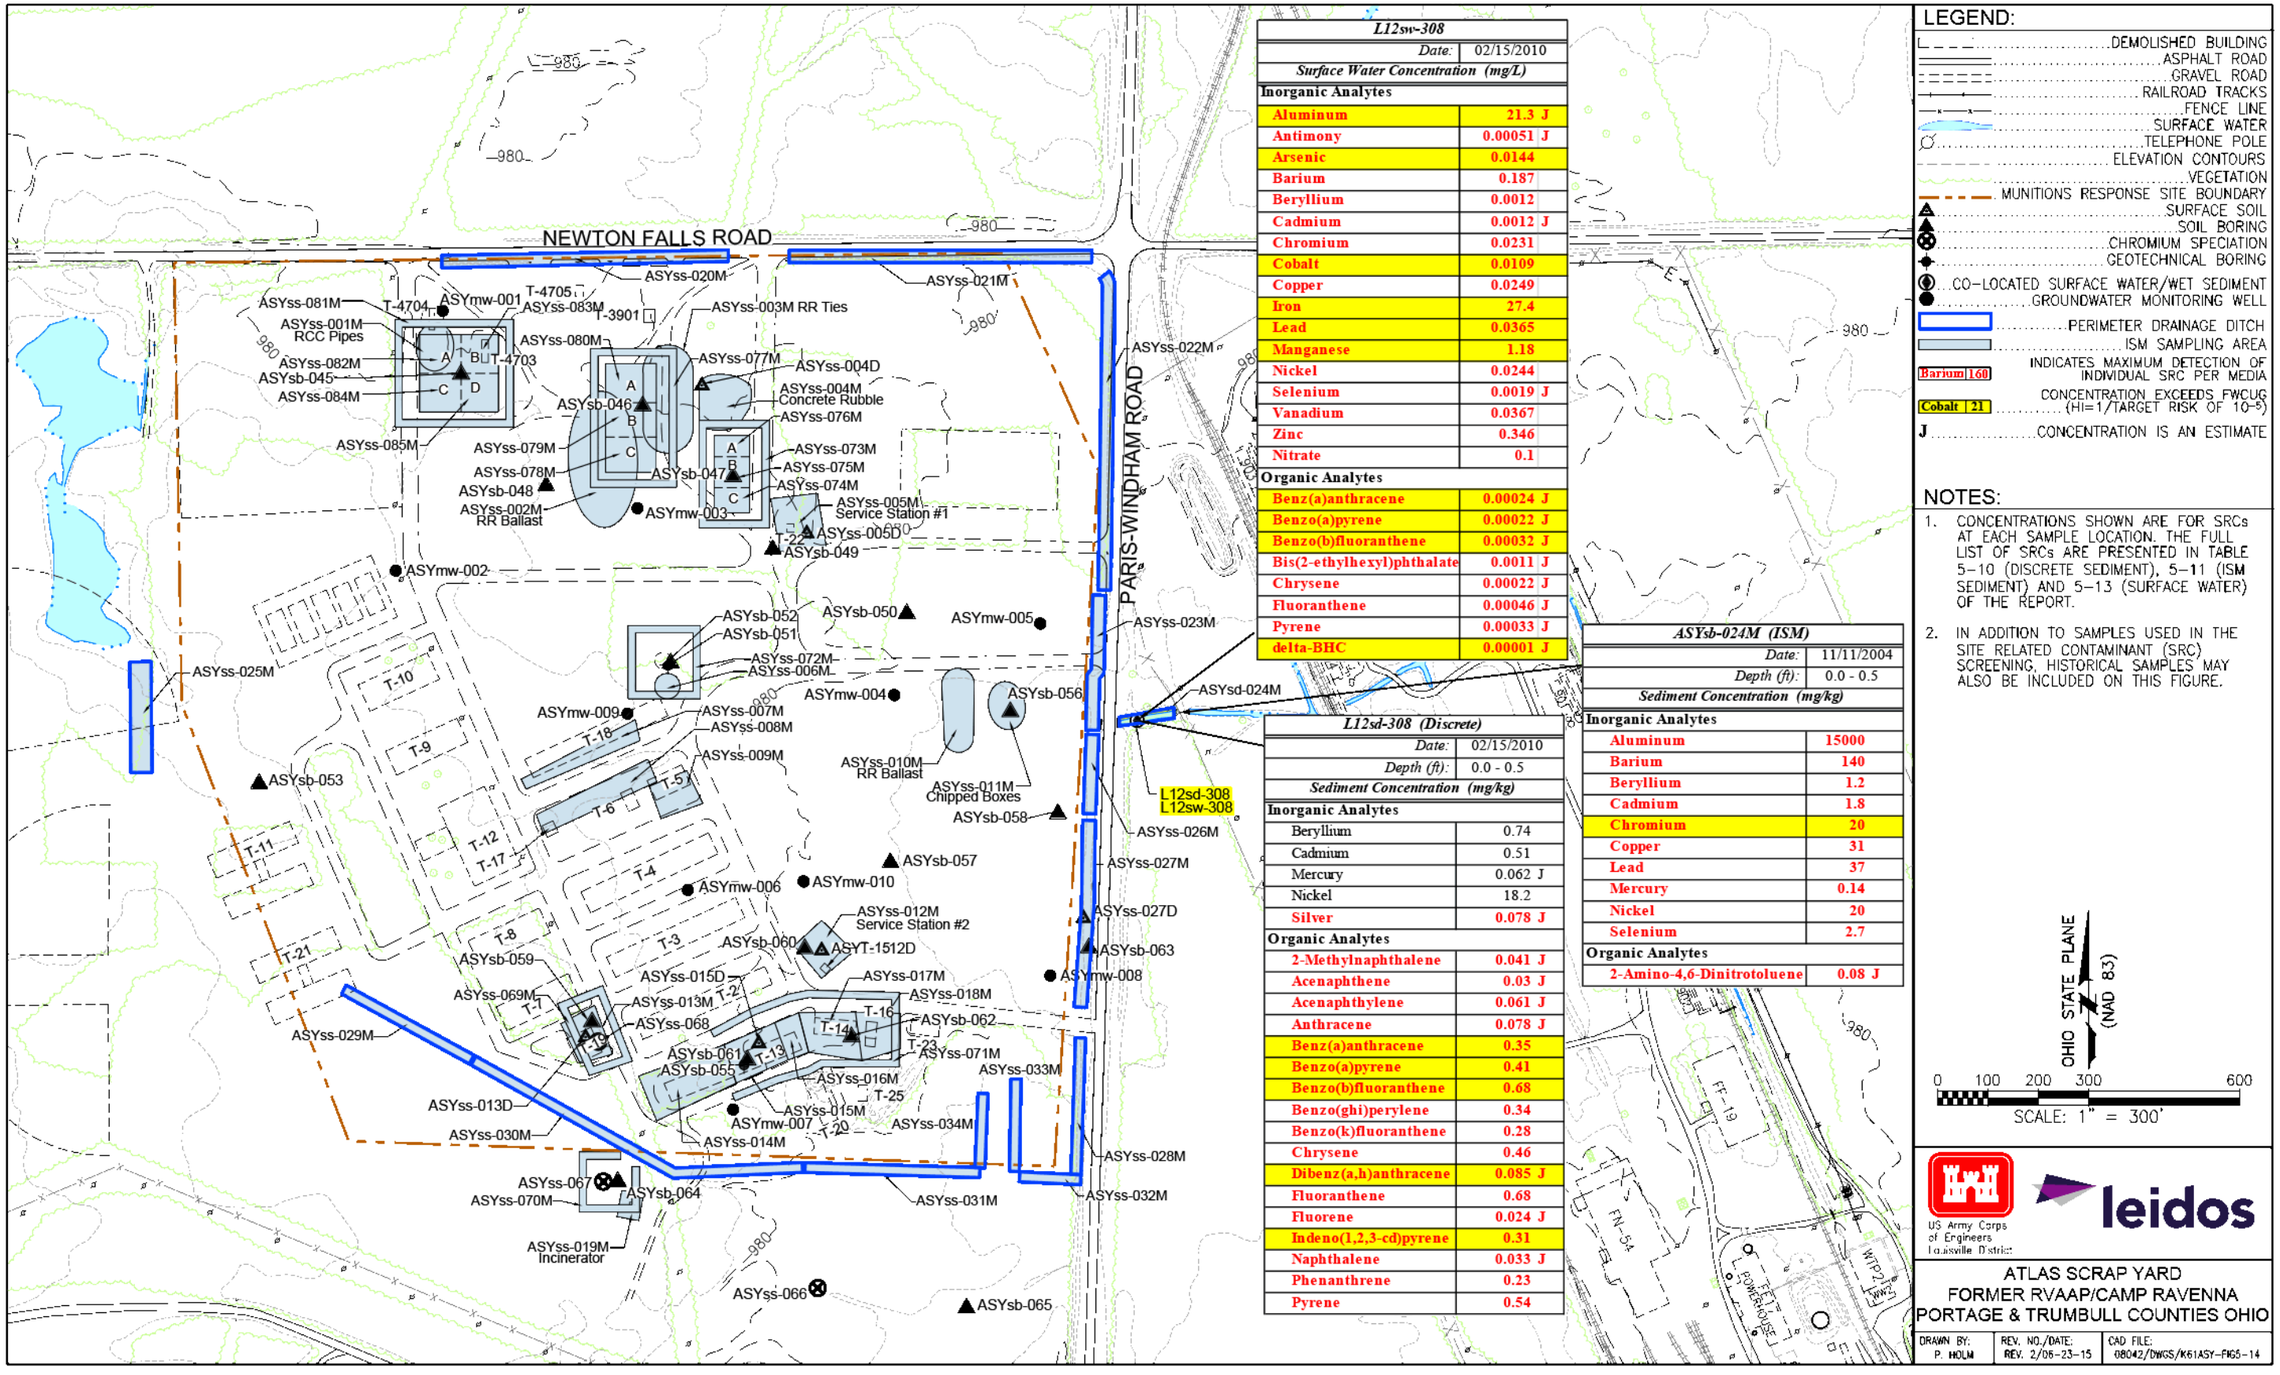

L12sw-308	
Date:	02/15/2010
Surface Water Concentration (mg/L)	
Inorganic Analytes	
Aluminum	21.3 J
Antimony	0.00051 J
Arsenic	0.0144
Barium	0.187
Beryllium	0.0012
Cadmium	0.0012 J
Chromium	0.0231
Cobalt	0.0109
Copper	0.0249
Iron	27.4
Lead	0.0365
Manganese	1.18
Nickel	0.0244
Selenium	0.0019 J
Vanadium	0.0367
Zinc	0.346
Nitrate	0.1
Organic Analytes	
Benz(a)anthracene	0.00024 J
Benzo(a)pyrene	0.00022 J
Benzo(b)fluoranthene	0.00032 J
Bis(2-ethylhexyl)phthalate	0.0011 J
Chrysene	0.00022 J
Fluoranthene	0.00046 J
Pyrene	0.00033 J
delta-BHC	0.00001 J

L12sd-308 (Discrete)	
Date:	02/15/2010
Depth (ft):	0.0 - 0.5
Sediment Concentration (mg/kg)	
Inorganic Analytes	
Beryllium	0.74
Cadmium	0.51
Mercury	0.062 J
Nickel	18.2
Silver	0.078 J
Organic Analytes	
2-Methylnaphthalene	0.041 J
Acenaphthene	0.03 J
Acenaphthylene	0.061 J
Anthracene	0.078 J
Benz(a)anthracene	0.35
Benzo(a)pyrene	0.41
Benzo(b)fluoranthene	0.68
Benzo(ghi)perylene	0.34
Benzo(k)fluoranthene	0.28
Chrysene	0.46
Dibenz(a,h)anthracene	0.085 J
Fluoranthene	0.68
Fluorene	0.024 J
Indeno(1,2,3-cd)pyrene	0.31
Naphthalene	0.033 J
Phenanthrene	0.23
Pyrene	0.54

ASYsb-024M (ISM)	
Date:	11/11/2004
Depth (ft):	0.0 - 0.5
Sediment Concentration (mg/kg)	
Inorganic Analytes	
Aluminum	15000
Barium	140
Beryllium	1.2
Cadmium	1.8
Chromium	20
Copper	31
Lead	37
Mercury	0.14
Nickel	20
Selenium	2.7
Organic Analytes	
2-Amino-4,6-Dinitrotoluene	0.08 J

LEGEND:

- DEMOLISHED BUILDING
- ASPHALT ROAD
- GRAVEL ROAD
- RAILROAD TRACKS
- FENCE LINE
- SURFACE WATER
- TELEPHONE POLE
- ELEVATION CONTOURS
- VEGETATION
- MUNITIONS RESPONSE SITE BOUNDARY
- SURFACE SOIL
- SOIL BORING
- CHROMIUM SPECIATION
- GEOTECHNICAL BORING
- CO-LOCATED SURFACE WATER/WET SEDIMENT
- GROUNDWATER MONITORING WELL
- PERIMETER DRAINAGE DITCH
- ISM SAMPLING AREA
- Barium 160 — INDICATES MAXIMUM DETECTION OF INDIVIDUAL SRC PER MEDIA
- Cobalt 21 — CONCENTRATION EXCEEDS FWCUG (HI=1/TARGET RISK OF 10-5)
- J — CONCENTRATION IS AN ESTIMATE

NOTES:

1. CONCENTRATIONS SHOWN ARE FOR SRCs AT EACH SAMPLE LOCATION. THE FULL LIST OF SRCs ARE PRESENTED IN TABLE 5-10 (DISCRETE SEDIMENT), 5-11 (ISM SEDIMENT) AND 5-13 (SURFACE WATER) OF THE REPORT.
2. IN ADDITION TO SAMPLES USED IN THE SITE RELATED CONTAMINANT (SRC) SCREENING, HISTORICAL SAMPLES MAY ALSO BE INCLUDED ON THIS FIGURE.

OHIO STATE PLANE (NAD 83)

0 100 200 300 600

SCALE: 1" = 300'

US Army Corps of Engineers Louisville District

leidos

ATLAS SCRAP YARD
FORMER RVAAP/CAMP RAVENNA
PORTAGE & TRUMBULL COUNTIES OHIO

DRAWN BY:	REV. NO./DATE:	CAD FILE:
P. HOLM	REV. 2/06-23-15	08042/DWGS/K61ASY-FIG5-14

Figure 5–14. Concentrations of SRCs in Sediment and Surface Water Samples

6.0 CONTAMINANT FATE AND TRANSPORT

Contaminant fate and transport modeling assesses the potential for SRCs to leach from surface soil, subsurface soil, and sediment sources at Atlas Scrap Yard and impact groundwater beneath the sources and downgradient receptor locations. Modeling results were included in the decision-making process to determine whether remedial actions of sources may be necessary to protect groundwater resources. Surface water transport pathways were evaluated in the HHRA and ERA and are presented in Sections 7.2 and 7.3, respectively. A summary of the principles of contaminant fate and transport are presented in this section along with the results of the modeling.

Section 6.1 describes the physical and chemical properties of SRCs found in soil and sediment at the AOC. Section 6.2 presents a conceptual model for contaminant fate and transport that considers AOC topography, hydrogeology, contaminant sources, and release mechanisms. Section 6.3 presents a soil screening analysis. Section 6.4 presents a sediment screening analysis to identify SRCs with the potential to migrate from soil and sediment to groundwater as initial CMCOPCs. Section 6.5 describes fate and transport modeling of final CMCOPCs and presents CMCOCs. Section 6.6 presents a summary and conclusions of the fate and transport analysis.

6.1 PHYSICAL AND CHEMICAL PROPERTIES OF SITE-RELATED CONTAMINANTS

Surface and subsurface soil SRCs (including 16 inorganic chemicals and 40 organic chemicals) and sediment SRCs (including 11 inorganic chemicals and 18 organic chemicals) were detailed in Section 5.0 and are summarized below:

- Inorganic SRCs in surface and subsurface soil: aluminum, arsenic, barium, beryllium, cadmium, chromium, cobalt, copper, lead, manganese, mercury, nickel, selenium, silver, thallium, and zinc.
- Inorganic SRCs in sediment: aluminum, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, selenium, and silver.
- Organic SRCs in surface and subsurface soil: 1,3,5-trinitrobenzene (TNB); 2,6-DNT; 2-amino-4,6-DNT; 2-methylnaphthalene; 2-nitrotoluene; 2-butanone; 3-nitrotoluene; 4-amino-2,6-DNT; 4-methylphenol; acenaphthene; acenaphthylene; acetone; anthracene; benz(a)anthracene; benzenemethanol; benzo(a)pyrene; benzo(b)fluoranthene; benzo(ghi)perylene; benzo(k)fluoranthene; bis(2-ethylhexyl)phthalate; butyl benzyl phthalate; carbazole; carbon disulfide; chrysene; di-n-butyl phthalate; dibenz(a,h)anthracene; dibenzofuran; diethyl phthalate; fluoranthene; fluorene; HMX; indeno(1,2,3-cd)pyrene; naphthalene; nitrocellulose; PCB-1260; phenanthrene; phenol; pyrene; tetryl; and toluene.
- Organic SRCs in sediment: 2-amino-4,6-DNT; 2-methylnaphthalene; acenaphthene; acenaphthylene; anthracene; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; benzo(ghi)perylene; benzo(k)fluoranthene; chrysene; dibenz(a,h)anthracene; fluoranthene; fluorene; indeno(1,2,3-cd)pyrene; naphthalene; phenanthrene; and pyrene.

Chemicals released into the environment are susceptible to several degradation pathways, including hydrolysis, oxidation, reduction, isomerization, photolysis, photo-oxidation, biotransformation, and biodegradation. Transformed products resulting from these processes may behave differently than their parent chemical in the environment.

Chemical migration is governed by the physical and chemical properties and the surface and subsurface media through which chemicals are transferred. In general, chemicals and structures with similar physical and chemical characteristics will show similar patterns of transformation, transport, or attenuation in the environment. Solubility, vapor pressure data, chemical partitioning coefficients, degradation rates, and Henry's Law Constant (HLC) provide information that can be used to evaluate contaminant mobility in the environment. Partitioning coefficients are used to assess relative affinities of chemicals for solution or solid phase adsorption. However, the synergistic effects of multiple migrating chemicals and complexity of soil/water interactions, including pH and oxidation-reduction potential, grain size, and clay mineral variability, are typically unknown.

The physical properties of the chemicals defined as SRCs in surface and subsurface soil are summarized in Tables E-1 and E-2 in Appendix E. These properties are used to assess the anticipated behavior of each chemical under environmental conditions. The physical properties of the chemicals defined as SRCs detected in soil and sediment are summarized in Section 6.1.1 through Section 6.1.5.

6.1.1 Chemical Factors Affecting Fate and Transport

The water solubility of a chemical is a measure of the saturated concentration of the chemical in water at a given temperature and pressure. The tendency for a chemical to be transported by groundwater is directly related to its solubility and inversely related to its tendencies to adsorb to soil and volatilize from water (OGE 1988). Chemicals with high water solubilities tend to desorb from soil, are less likely to volatilize from water, and are susceptible to biodegradation. The water solubility of a chemical varies with temperature, pH, and the presence of other dissolved chemicals (including organic carbon and humic acids).

The octanol-water partition coefficient (K_{ow}) can be used to estimate the tendency for a chemical to partition between environmental phases of different polarity. The K_{ow} is a laboratory-determined ratio of the concentration of a chemical in the n-octanol phase of a two-phase system to the concentration in the water phase. Chemicals with log K_{ow} values less than one are highly hydrophilic, while chemicals with log K_{ow} values greater than four will partition to soil particles (Lyman et al. 1990).

The water/organic carbon partition coefficient (K_{oc}) is a measure of the tendency of an organic chemical to partition between water and organic carbon in soil. The K_{oc} is defined as the ratio of the absorbed chemical per unit weight of organic carbon to the aqueous solute concentration.

This coefficient can be used to estimate the degree to which an organic chemical will adsorb to soil and thus not migrate with groundwater. The higher the K_{oc} value, the greater is the tendency of the chemical to partition into soil (OGE 1988). The soil/water partitioning coefficient (K_d) is calculated by multiplying the K_{oc} value by the fraction of organic carbon in the soil.

Vapor pressure is a measure of the pressure at which a chemical and its vapor are in equilibrium. The value can be used to determine the extent to which a chemical would travel in air, as well as the rate of volatilization from soil and solution (OGE 1988). In general, chemicals with vapor pressures lower than 10^{-7} mm mercury will not be present in the atmosphere or air spaces in soil in significant amounts, while chemicals with vapor pressures higher than 10^{-2} mm mercury will exist primarily in the air (Dragun 1988).

The HLC value for a chemical is a measure of the ratio of the chemical's vapor pressure to its aqueous solubility. The HLC value can be used to make general predictions about a chemical's tendency to volatilize from water. Chemicals with HLC values less than 10^{-7} atm-m^3/mol will generally volatilize slowly, while chemicals with a HLC greater than 10^{-3} atm-m^3/mol will volatilize rapidly (Lyman et al. 1990).

6.1.2 Biodegradation

Organic chemicals with differing chemical structures will biodegrade at different rates. Primary biodegradation consists of any biologically induced structural change in an organic chemical. Complete biodegradation is the biologically mediated degradation of an organic chemical into carbon dioxide, water, oxygen, and other metabolic inorganic products (Dragun 1988). The first order biodegradation rate of an organic chemical is proportional to the concentration:

$$-dC/dt = kC \qquad \text{(Equation 6-1)}$$

Where:

C = concentration
t = time
k = biodegradation rate constant = $\ln 2 / t_{1/2}$
$t_{1/2}$ = biodegradation half-life

The biodegradation half-life is the time necessary for half of the chemical to degrade. The biodegradation rate of an organic chemical generally depends on the presence and population size of soil microorganisms that are capable of degrading the chemical.

6.1.3 Inorganic Chemicals

Inorganic chemicals detected in soil and sediment samples are associated with the aqueous phase and leachable metal ions on soil particles. The transport of this material from unsaturated soil to the underlying water table is controlled by the physical processes of precipitation percolation, chemical interaction with the soil, and downward transport of metal ions by continued percolation. The chemistry of inorganic chemical interactions with percolating precipitation and varying soil conditions is complex and includes numerous chemical transformations that may result in altered oxidation states, including ion exchange, adsorption, precipitation, or complexation. These chemical reactions, which are affected by environmental conditions (pH, oxidation/reduction conditions, type and amount of organic matter, clay content, and the presence of hydrous oxides), may act to enhance

or reduce the mobility and toxicity of metal ions. In general, these reactions are reversible and add to the variability commonly observed in distributions of inorganic chemicals in soil.

The chemical form of an inorganic chemical determines its solubility and mobility in the environment; however, chemical speciation is complex and difficult to delineate in routine laboratory analysis. Inorganic chemicals in soil are commonly found in several forms, including dissolved concentrations in soil pore water, metal ions occupying exchange sites on inorganic soil constituents (adsorbed to inorganic soil constituents), metal ions associated with insoluble organic matter, precipitated inorganic chemicals as pure or mixed solids, and metal ions present in the structure of primary or secondary minerals.

The dissolved (aqueous) fraction and its equilibrium sorbed fraction are important when considering the migration potential of inorganic chemicals through soil. Of the inorganic chemicals that are likely to form, chlorides, nitrates, and nitrites are commonly the most soluble. Sulfate, carbonate, and hydroxides generally have low to moderate solubility. Soluble chemicals are transported in aqueous forms subject to attenuation, whereas less soluble chemicals remain as a precipitate and limit the overall dissolution of metal ions. The solubility of the metal ions is also regulated by ambient chemical conditions, including pH and oxidation/reduction.

The attenuation of metal ions in the environment can be estimated numerically using the retardation factor (R), dispersion in higher flow systems (high conductivity environments), and diffusion in low conductivity environments. R defines the extent to which the velocity of the contaminant is slowed, which is largely derived from the soil/water K_d. R is calculated using the following equation:

$$R = 1 + (K_d \rho_b)/ \theta_w \qquad \text{(Equation 6-2)}$$

Where:

ρ_b = the soil bulk dry density (g/cm^3)
θ_w = soil moisture content (dimensionless)

Metal ion concentrations in the environment do not attenuate by natural or biological degradation because of low volatility and solubility of the ions. Inorganic chemicals may be biotransformed or bioconcentrated through microbial activity.

6.1.4 Organic Chemicals

Organic chemicals, such as SVOCs or VOCs, may be transformed or degraded in the environment by processes including hydrolysis, oxidation/reduction, photolysis, volatilization, biodegradation, or biotransformation. The half-life of organic chemicals in transport media can vary from minutes to years, depending on environmental conditions and chemical structures. Some types of organic chemicals are very stable, and degradation rates can be very slow. Organic degradation may either enhance (by producing more toxic byproducts) or reduce (reducing concentrations) the toxicity of a chemical in the environment.

6.1.5 Explosives – Related Chemicals

Several explosive compounds were detected in soil and sediment at Atlas Scrap Yard. Microbiological and photochemical transformation may affect the fate and transport of explosive compounds in the environment. For example, based on the results of culture studies involving the removal of TNT by activated sludge microorganisms, it has been concluded that TNT undergoes biotransformation but not biodegradation (USABRDL 1989). Biotransformation of TNT occurs when the nitro groups are reduced by microbial reduction, typically under anaerobic conditions. Beneficial bacteria in these reactions include Pseudomonas, Escherichia, Bacillus, Citrobacter, Enterobacter, Klebseilla, Veillonella, and Clostridium (USACHPPM 2000). It has been found that anaerobic metabolism occurs in two stages (Funk et al. 1993). The first stage is the reductive stage in which TNT is reduced to its amino derivatives. In the second stage, degradation to non-aromatic products begins after the third nitro group is reduced.

The biotransformation rate of TNT has been found to be rapid at most sites (ERDC 2007) and may be increased with the presence of carbon (USACHPPM 2000). Fungi and photolysis can also biotransform TNT. 1,3,5-TNB, 4,6-dinitroanthranil, 2,4,6-trinitrobezadehyde, and 2,4,6-trinitrobenzonitrite are the predominant transformation products due to photolysis of TNT (USACHPPM 2000). The biotransformation pathway for TNT is shown in Figure E-1 in Appendix E (Kaplan and Kaplan 1982).

Biotransformation of 2,4-DNT has been systematically studied in laboratory cell cultures. The biotransformation pathway is shown in Figure E-2 in Appendix E (McCormick et al. 1978). The reduction products include the amino and azoxy derivatives as observed with TNT biotransformation. As with TNT and DNT, the principal mode of microbial transformation of the nitroaromatic chemicals TNB and 1,3-dinitrobenzene is reduction of nitro groups to form amino groups. TNB is a photolytic product of TNT but will not undergo further photolysis. TNB will also resist hydrolysis. TNB primarily breaks down through microbial degradation (USACHPPM 2001b).

Tetryl may undergo biotransformation, hydrolysis, and photodegradation to produce several different products, such as N-methylpicramide and 4-amino-N-methyl-N,2,6-trinitroaniline (USACE 1994). Nitrocellulose is an aliphatic nitrate ester that will gelatinize when mixed with nitroglycerin. Nitrocellulose occurs as a fibrous solid that can act as a sorbent that will dissolve in water under highly basic conditions with high temperatures. Nitrocellulose can undergo denitrification as a degradation pathway. Degradation of nitrocellulose to non-reactive nitrocellulose has been observed under methanogenic and fungus-mediated reducing conditions (USACE 2006).

Limited information exists regarding biotransformation or biodegradation of cyclotrimethylenetrinitramine (RDX) and HMX. RDX has a natural degradation rate, typically in the range of months, but may take years in more arid environments (ERDC 2007). One pilot study evaluated the treatment of pink water waste using an anaerobic fluidized-bed granular activated carbon bioreactor (USACE 2004). The study indicated RDX biodegrades in the presence of ethanol. Such data may be useful for evaluating potential use of enhanced bioremediation as a remedial option. Figure E-3 in Appendix E shows the biotransformation pathway for RDX (McCormick et al.

1981). A conservative biodegradation rate of 5.00E-04 per day was used for RDX (ANRCP 1999). Biotransformation of HMX, primarily by anaerobic degradation (ERDC 2007), occurs at a slow rate in the environment (USACHPPM 2001a). HMX degrades at a slower rate than RDX (ERDC 2007). HMX is primarily broken down by photolysis and has a photolytic rate constant of 0.15 days (USEPA 1988). Breakdown products of HMX include nitrate, nitrite, and formaldehyde (USACHPPM 2001a). Figure E-4 in Appendix E shows the biotransformation pathway for HMX (ATSDR 1997).

6.2 CONCEPTUAL MODEL FOR FATE AND TRANSPORT

The CSM, which defines the framework for fate and transport modeling, describes conditions at Atlas Scrap Yard, including the contaminant sources, surficial and subsurface hydrogeologic conditions, contaminant migration and pathways, and contaminant release mechanisms.

AOC conditions described in Sections 2.0 through 5.0 include contaminant source information, the surrounding geologic and hydrologic conditions, and the magnitude of SRCs and their current spatial distribution. Information from the site information presented in Section 3 and the nature and extent evaluation in Section 5.0 was used to develop the CSM for fate and transport modeling by identifying SRCs and migration pathways. The CSM is based on information and data collected for historical investigations, this RI Report, and informed assumptions about the AOC. Assumptions contained in the CSM are reiterated throughout this section. The better the information and the greater the accuracy of the assumptions, the more accurately the CSM describes the AOC; therefore, the more reliable the fate and transport modeling predictions can be. A summary of the salient elements of the CSM that apply to fate and transport modeling are summarized in the following sections.

6.2.1 Contaminant Sources

Some primary contaminant sources are still located at the AOC. These include parking areas made up of slag and asphalt gravel, stockpiled railroad ties, concrete debris, and other stockpiled building demolition material. Secondary sources (contaminated media) identified in previous investigations are further evaluated in this report. Another potential secondary source of contamination at the AOC is contaminated sediment within the drainage ditch along Paris-Windham Road, which may have been deposited during a storm event, which has potential to leach contaminants to the groundwater.

6.2.2 Hydrogeology

A description of regional and AOC-specific geology and hydrology are provided in Sections 3.3.3 and 3.4.2, respectively, and are summarized below.

- The topography at Atlas Scrap Yard ranges from approximately 986 ft amsl near the northwestern boundary of the AOC to approximately 976 ft amsl near the central eastern boundary of the AOC. Surface water drainage associated with heavy rainfall events would follow the topography (Figure 3-1). Most of the surface runoff flows overland and drains into drainage ditches that run parallel to roads bordering the AOC that flow to the north and to the east.

- Soil beneath the AOC consists of silty clay tills with trace gravel, with sand content generally increasing with depth, as observed in subsurface borings installed during the PBA08 RI (Appendix A). Bedrock was encountered at 19-29 ft bgs during monitoring well installation under the Characterization of 14 AOCs (MKM 2007).
- Ten groundwater monitoring wells were installed at the AOC to an average depth of 24 ft bgs. Monitoring wells ASYmw-007, ASYmw-008, and ASYmw-010 were screened in unconsolidated zone groundwater, while ASYmw-001 through ASYmw-006 and ASYmw-009 were screened in the Sharon Sandstone, based on observations in the soil.
- The potentiometric surface shows the groundwater flow pattern from east to west. The average horizontal hydraulic gradient is 0.0046 ft/ft (Figure 3-1).
- Water level elevations at the AOC ranged from 967.54-973.63 ft amsl with the highest elevation at the unconsolidated well ASYmw-008 (Figure 3-1). Potentiometric data indicate the groundwater table occurs within the unconsolidated soil throughout the AOC.

6.2.3 Contaminant Release Mechanisms and Migration Pathways

Based on the information presented above, the following contaminant release mechanisms and migration pathways have been identified at the AOC:

- Contaminant leaching from soil to the water table (vertical migration) and lateral transport to downgradient receptors [i.e., unnamed tributary to Sand Creek (flowing northwest) and unnamed tributary to the Mahoning River flowing southwest)];
- Contaminated sediment transported to potential downstream receptors;
- Contaminated surface water migrating to potential downstream receptors; and
- Contaminated sediment within wet ditches and deposited on ditch banks as a secondary source of leaching to the water table (vertical migration) and lateral transport to potential downgradient receptors [i.e., unnamed tributary to Cobbs Ponds (flowing northeast)].

The first of these pathways, which considers a primary groundwater transport pathway, is treated explicitly in this fate and transport section. Sediment and surface water transport pathways were evaluated in the HHRA and ERA and are presented in Sections 7.2 and 7.3, respectively. The fourth pathway listed above, which considers a secondary groundwater transport pathway, was evaluated using the sediment screening analysis presented in Section 6.4.

One of the principal migration pathways at the AOC is percolation through the unsaturated soil to the water table (i.e., vertical leaching of contaminants from soil into groundwater). However, because of the very heterogeneous nature of the unconsolidated glacial material, groundwater flow patterns within the unconsolidated soil are difficult to predict. Precipitation that does not leave the AOC as surface runoff percolates into the subsurface. Some of the percolating water leaves this environment via evapotranspiration after little or no vertical migration.

The remainder of the water percolates into the water table. As discussed in Section 6.2.4, the rate of percolation is controlled by soil cover, ground slope, saturated conductivity of the soil, and meteorological conditions. Figure 6-1 illustrates the contaminant migration conceptual model.

Once the contaminant leachate percolates through the soil and reaches the water table, it migrates with the local groundwater and discharges at the downgradient receptors. Groundwater flow likely occurs along preferential pathways (e.g., sand seams, channel deposits, or other stratigraphic discontinuities) having higher permeabilities. For inorganic chemicals, lateral migration through groundwater will be very limited due to their high retardation by the bedrock material (USACE 2003a).

Additional factors that affect the leaching rate include a chemical's solubility, sorption capacity (expressed by the K_d), and the amount of percolation. Insoluble chemicals will precipitate out of the solution in the subsurface or remain in insoluble forms with little leaching.

Another factor that affects whether a chemical will reach the water table through percolation of precipitation is the chemical's rate of decay. Most organic compounds decay at characteristic rates proportional to the chemical's half-life. For a given percolation rate, those chemicals with long half-lives have a greater potential for contaminating groundwater than those with shorter half-lives. For this analysis, the rate of decay/half-life was not considered.

Contaminant releases through gaseous emissions and airborne particulates are not significant at Atlas Scrap Yard. The AOC is vegetated, located in a humid temperate climate, and soil moisture is typically high, which prevents dust borne contaminant migration. SRCs generally exhibit low volatility, which limits the production of gaseous emissions. Therefore, there is likely little to no gaseous emission, and contaminant levels in the air pathway are minor to nonexistent.

6.2.4 Water Budget

The potential for contaminant transport begins with precipitation. Percolation is the driving mechanism for leaching of soil contaminants to groundwater. The actual amount of rainwater available for flow and percolation to groundwater is highly variable and depends upon soil type and climatic conditions. A water balance calculation can be used as a tool to quantitatively account for all components of the hydrologic cycle. The quantified elements of the water balance are used for inputs to the soil leaching and groundwater transport models discussed later.

The components of a simple steady-state water balance model include precipitation, evapotranspiration, surface runoff, and groundwater recharge or percolation. These terms are defined as follows:

$$P = ET + Sr + q \qquad \text{(Equation 6-3)}$$

or

$$\text{Rainwater available for flow} = Sr + q = P - ET \qquad \text{(Equation 6-4)}$$

Where:

P = precipitation
ET = evapotranspiration
Sr = surface runoff
q = groundwater recharge or percolation

It is expected that loss of runoff also occurs in the form of evaporation. The remaining water, after runoff and evaporation, is available for percolation which includes loss to the atmosphere by evapotranspiration. The water balance estimations were developed using the Hydrologic Evaluation of Landfill Performance (HELP) model (USEPA 1994). See Table E-3 in Appendix E for parameters used in the HELP model to develop the water budget estimates used in the evaluation. Calculations using precipitation and temperature data for a 100-year period were generated synthetically using coefficients for Cleveland, Ohio (e.g., the nearest weather station to Camp Ravenna with HELP model coefficients).

The annual average water balance estimates indicate an evapotranspiration of 28% (10.3 inches) of total precipitation (37 inches). The remaining 72% (27 inches) of rainwater is available for surface water runoff and percolation to groundwater. Of the 72% (27 inches) of water available for runoff or percolation, groundwater recharge (percolation) accounts for 13% (3.6 inches), and surface runoff (along downgradient topography to nearest surface water bodies) accounts for the remaining 87% (23 inches).

6.3 SOIL SCREENING ANALYSIS

Soil screening analyses are screening evaluations performed to identify SRCs with the potential to leach to groundwater as CMCOPCs. The five steps for the soil leachability analysis are illustrated in Figure 6-2.

6.3.1 Soil Screening Analysis

The first step of the soil screening analysis is the development of SRCs, as presented Section 5.0. A summary of SRCs identified for soil and sediment is presented in Section 6.1.

The second step of the soil screening process (Figure 6-2) involves comparing the maximum concentrations of the SRCs with maximum contaminant level (MCL)-based Generic Soil Screening Levels (GSSLs), which were developed for Superfund sites for contaminant migration to groundwater (USEPA 1996b, USEPA 2012). The GSSL is defined as the concentration of a chemical in soil that represents a level of contamination below which there is no concern for impacts to groundwater under CERCLA, provided conditions associated with USEPA risk-based Soil Screening Levels (SSLs) are met.

Generally, if chemical concentrations in soil fall below the GSSL, and there are no groundwater receptors of concern or anticipated exposures, then no further study or action is warranted for that chemical. If the GSSL for a chemical is not available, the USEPA risk-based SSL for groundwater migration, dated November 2012 (USEPA 2012), will be obtained from the USEPA regional screening level (RSL) website and used. If neither the GSSL nor the USEPA risk-based SSL for a chemical is available, then no further evaluation of the chemical is performed and it is eliminated from the list of the initial CMCOPCs. However, some chemicals have been assigned surrogates by risk assessors if the chemical without an SSL is similar to another chemical with an SSL. Surrogates

used for this analysis include acenaphthene for acenaphthylene and pyrene for benzo(ghi)perylene and phenanthrene.

One soil SRC, carbazole, was eliminated as an initial CMCOPC because it does not have an associated GSSL or USEPA risk-based SSL. Because this constituent does not have an associated USEPA RSL or MCL, an AOC-specific SSL could not be calculated. Carbazole was detected in 4 of 14 soil samples at a maximum concentration of 0.44 mg/kg. Carbazole is an SVOC with a relatively high K_{oc} value (9.16E+03 L/kg); therefore, this compound has the tendency to partition into soil and is not likely to pose a risk to groundwater. Carbazole was not detected in groundwater samples collected at Atlas Scrap Yard under the 2009 FWGWMP (EQM 2010).

The initial CMCOPC screen, as presented in Table E-4 in Appendix E, eliminates one inorganic SRC and 17 organic SRCs from further consideration. There were 15 inorganic and 23 organic SRCs carried forward to the third step of the soil CMCOPC screening process.

The third step of the soil screening process (Figure 6-2) involves comparing the maximum chemical concentrations with the Site-specific SSLs (SSSLs). The SSSL is defined as the GSSL (or the USEPA risk-based SSL for groundwater protection if a GSSL is not available) multiplied by the AOC-specific Dilution Attenuation Factor (DAF). Direct partitioning is used to derive the GSSLs, assuming groundwater is in contact with the chemicals in soil and the groundwater concentration is equal to the leachate concentration. However, as leachate moves through soil, chemical concentrations are attenuated by adsorption and degradation. When the leachate reaches the water table, dilution by groundwater further reduces leachate concentrations. This concentration reduction can be expressed by a DAF. DAFs can vary based on AOC-specific characteristics (e.g., hydrogeologic properties, contaminated source area, depth to contamination). As described in the *Soil Screening Guidance: Technical Background Document* (USEPA 1996b), chemical dilution in groundwater is estimated at each AOC from an AOC-specific DAF. The DAF, which is defined as the ratio of soil leachate concentration to receptor point concentration, is minimally equal to one. Dilution in groundwater is derived from a simple mixing zone equation (Equation 6-5) and relies upon estimation of the mixing zone depth (Equation 6-6).

$$DAF = 1 + \frac{(K \times i \times d)}{(q \times L)} \qquad \text{(Equation 6-5)}$$

Where:

DAF = dilution attenuation factor
K = aquifer hydraulic conductivity (m/yr)
i = horizontal hydraulic gradient (m/m)
q = percolation rate (m/yr)
L = source length parallel to groundwater flow (m)
d = mixing zone depth (m) (which is defined below)

$$d = \sqrt{0.0112 \times L^2} + d_a \times \left[1 - \exp\left(\frac{-L \times I}{K \times i \times d_a}\right)\right] \quad \text{(Equation 6-6)}$$

Where:

d_a = aquifer thickness (m)

$d \leq d_a$

As stated above, if the aquifer thickness is less than the calculated mixing zone depth, then the aquifer thickness is used for "d" in the DAF calculation. The DAF calculation for the AOC is presented in Table E-5 in Appendix E. It should be noted that the purpose of this screen is not to identify the chemicals that may pose risk at downgradient locations, but to target those chemicals that pose the greatest problem if they migrate from the AOC.

Based on this screening and an AOC-specific DAF of 1.51, aluminum, acenaphthene, bis(2-ethylhexyl)phthalate, and fluorene were eliminated from further consideration. All the remaining SRCs exceeded their published or calculated GSSL multiplied by the respective DAF and were identified as the initial CMCOPCs, based on leaching to groundwater. The SRCs identified as initial CMCOPCs are presented in Table E-6 in Appendix E.

The fourth step of the soil screening process (Figure 6-2) involves eliminating initial CMCOPCs identified in the SSSL evaluation which require more than 1,000 years to leach through the unsaturated zone before reaching the water table from further consideration. A period of 1,000 years was conservatively selected to evaluate eventual migration of the contaminant front to the water table despite uncertainties in vadose zone hydraulic parameters and groundwater recharge over time. Additionally, USACE suggests a screening value of 1,000 years be used due to the high uncertainty associated with predicting conditions beyond that time frame (USACE 2003a). Therefore, the initial CMCOPCs at the selected sources were screened against a travel time of greater than 1,000 years. The travel time in this screen is the time required for a CMCOPC to migrate vertically from the base of the soil interval detected above the background concentration to the water table. This distance is the leaching zone evaluated in Table E-7 of Appendix E, which may vary across the AOC based on the varying depths of soil sample concentrations above the facility-wide background concentrations and the elevation of the water table.

The estimated travel time for each initial CMCOPC to reach the water table is determined using the following equations:

$$T = \frac{Lz \times R}{V_p} \quad \text{(Equation 6-7)}$$

Where:

T = leachate travel time (year)

Lz = thickness of attenuation zone (ft)

R = retardation factor (dimensionless) (Equation 6-2)

V_p = porewater velocity (ft/year)

and

$$V_p = \frac{q}{\theta_w} \qquad \text{(Equation 6-8)}$$

Where:

q = percolation rate (ft/year)

θ_w = fraction of total porosity that is filled by water

If the travel time for a chemical from a source area exceeded 1,000 years, then the chemical was eliminated from the list of initial CMCOPCs. Twelve inorganic and six organic SRCs were eliminated from further consideration based on their travel times exceeding 1,000 years. Initial CMCOPCs with travel times less than 1,000 years were retained for further evaluation (Appendix E, Table E-7). The constituents selected for further evaluation with Seasonal Soil Compartment Model (SESOIL) modeling are listed in Table 6-1.

In the fifth step (Figure 6-2), the initial CMCOPCs were further evaluated using fate and transport models provided in Section 6.5.

6.3.2 Limitations and Assumptions of Soil Screening Analysis

It is important to recognize that acceptable soil concentrations for individual chemicals are highly AOC-specific. The GSSLs used in this screening are based on a number of default assumptions chosen to be protective of human health for most AOC conditions (USEPA 1996b). These GSSLs are expected to be more conservative than SSSLs based on AOC conditions. The conservative assumptions included in this analysis are: (1) no adsorption in the unsaturated zone or in the aquifer; (2) no biological or chemical degradation in the soil or aquifer; and (3) contamination is uniformly distributed throughout the source. However, the GSSL does not incorporate existing contamination already present within the aquifer.

6.4 SEDIMENT SCREENING ANALYSIS

Sediment SRCs were developed in Section 4.4 and are presented in Section 6.1. The purpose of this screening analysis is to identify CMCOPCs based on contaminant migration from sediment to groundwater. Any identified CMCOPCs are modeled with Analytical Transient 1-, 2-, 3- Dimensional (AT123D) to a downgradient receptor if present. The four steps for the sediment screening analysis are illustrated in Figure 6-2.

As there were no co-located sediment and surface water data for Atlas Scrap Yard, the sample-specific DAF was calculated based on sediment and surface water concentration data from location L12-308, which was collected from the drainage ditch along Paris-Windham Road. Sediment SRCs were screened by developing leachate concentrations assuming equilibrium between sediment and groundwater. The predicted leachate concentrations were diluted based on a sample-specific DAF calculated by dividing the calculated leachate concentrations by the co-located surface water concentrations. The DAF was calculated for each chemical that was detected in the sediment and surface water at the same sample location. The calculated DAF was then used to calculate the maximum groundwater concentration, considering dilution for sediment SRCs. The lowest DAF

calculated for the sample area was used for sediment SRCs that did not have a sample-specific DAF. The DAFs calculated for each chemical are shown in Table 6-2.

This sediment screening analysis assumed that the sediment concentration and recharging groundwater concentration were in equilibrium and a sample-specific DAF for each chemical was used for dilution in the aquifer. Based on this screening analysis, five inorganic SRCs (aluminum, beryllium, cadmium, nickel, and silver) and 11 organic SRCs [2-methylnaphthalene, acenaphthene, acenaphthylene, anthracene, benzo(ghi)perylene, benzo(k)fluoranthene, chrysene, fluoranthene, fluorene, phenanthrene, and pyrene] did not exceed the risk-based screening criteria and were eliminated from further evaluation. The remaining SRCs [barium, chromium, copper, lead, mercury, selenium, 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene] were evaluated with AT123D models, described in Section 6.5. See Table E-8 in Appendix E for the results of the sediment screening analysis.

6.5 FATE AND TRANSPORT MODELING

Contaminant fate and transport modeling represents the fifth step in the fate and transport screening and evaluation process (Figure 6-3). SESOIL modeling was performed for chemicals identified as initial CMCOPCs from the soil screening analysis presented in Section 6.3 and summarized in Table 6-1. SESOIL modeling was performed to predict chemical concentrations in the leachate immediately beneath the selected source areas and just above the water table. If the predicted maximum leachate concentration of an initial CMCOPC was higher than the facility-wide background concentration and the lowest risk-based screening value (Resident Adult FWCUG, MCL, or RSL), the CMCOPC was further evaluated using the AT123D model to predict future maximum concentrations in groundwater beneath the source, as well as at downgradient receptor locations, if applicable. The downgradient receptor location (if required) is the closest surface water body feature downgradient of the source areas that is connected to the groundwater. The predicted concentrations of CMCOPCs in groundwater beneath the source were compared to available groundwater monitoring results for the AOC to validate modeling results and provide WOE for identifying or eliminating CMCOCs.

6.5.1 Modeling Approach

Contaminant transport includes the movement of water and dissolved material from the source areas to groundwater. This occurs as rainwater infiltrates from the surface and percolates through the area of contamination, its surrounding soil, and into the saturated zone. The downward movement of water, driven by gravitational potential, capillary pressure, and other components of total fluid potential mobilizes the contaminants and carries them through the soil into the mixing zone with the water table. Lateral transport within the shallow bedrock is controlled by the groundwater gradient. Vertical transport (evaluated with the SESOIL model) through the overburden to the water table and horizontal transport (evaluated with the AT123D model) through the shallow bedrock to downgradient receptor locations are illustrated in Figure 6-1.

The output of the contaminant fate and transport modeling is presented as the expected maximum concentration of modeled contaminants at the selected receptor locations. For SESOIL, the receptor location is the groundwater table beneath the source area. For this analysis, seven ISM sampling locations were considered as sources of contamination based on the results of the soil screening analysis. A separate SESOIL analysis was performed for each initial CMCOPC listed in Table 6-1 and is presented in Figure 6-4.

The predicted maximum leachate concentration just above the water table, observed in the SESOIL results, was compared against its applicable RVAAP facility-wide background concentration, as well as RVAAP FWCUGs for the Resident Adult, MCL, and RSL. If the predicted maximum leachate concentration of an initial CMCOPC was higher than the facility-wide background concentration, and the lowest risk-based screening value (Resident Adult FWCUG, MCL, or RSL), the CMCOPC was further evaluated using the AT123D model to predict future maximum concentrations in groundwater beneath the source, as well as at downgradient receptor locations, if applicable.

If a predicted maximum leachate concentration was lower than the screening criteria, the chemical was no longer considered a CMCOPC.

For chemicals identified as CMCOPCs, maximum concentrations predicted by AT123D in groundwater directly below the source areas and at the downgradient receptor locations were compared to the applicable RVAAP facility-wide background concentrations, as well as RVAAP FWCUGs for the Resident Adult, MCL, and RSL. If the predicted maximum concentration of a CMCOPC was higher than its facility-wide background concentration and the lowest risk-based screening value (Resident Adult FWCUG, MCL, or RSL), the chemical was retained as a CMCOC. If the predicted maximum concentration of a CMCOPC in groundwater directly below the source areas and at the downgradient receptor location was lower than the screening criteria, the chemical is not considered a CMCOC.

CMCOCs identified by modeling results were evaluated with respect to WOE for retaining or eliminating CMCOCs from further consideration as a basis for potential soil or sediment remedial actions. Lines of evidence include validation of modeling results using available AOC-specific groundwater monitoring data. Modeled timelines for potential leaching and lateral transport were evaluated with respect to estimated times for contaminant releases during former RVAAP operations to determine if peak leaching concentrations would likely have occurred in the past. Some CMCOCs present at or below RVAAP soil or sediment background concentrations may have predicted leachate or groundwater concentrations exceeding risk-based criteria due to conservative model assumptions; therefore, these were also identified and considered in the evaluation. Additionally, identified CMCOCs were compared to COCs identified in the HHRA to determine if they had an associated risk related to direct exposure to soil or sediment or if CMCOCs and COCs were co-located and may be addressed simultaneously under a potential remedial action.

6.5.2 Model Applications

The SESOIL model (GSC 1998) used for leachate modeling, when applicable, estimates pollutant concentrations in the soil profile following introduction via direct application and/or interaction with transport media. The AT123D model (DOE 1992) is an analytical groundwater pollutant fate and transport model. It computes the spatial-temporal concentration distribution of waste in the aquifer system and predicts the transient spread of a contaminant plume through a groundwater aquifer. The application of both of these models is discussed in the following subsections.

6.5.2.1 SESOIL Modeling

The SESOIL model defines the soil column as compartments extending from the ground surface through the unsaturated zone and to the upper level of the saturated soil zone or top of bedrock. Processes simulated in SESOIL are categorized in three cycles: the hydrologic cycle, sedimentation cycle, and pollutant cycle. Each cycle is a separate submodule in the SESOIL code. The hydrologic cycle includes rainfall, surface runoff, percolation, soil-water content, evapotranspiration, and groundwater recharge. The sediment washload cycle includes erosion and sediment transport.

The pollutant cycle includes convective transport, volatilization, adsorption/desorption, and degradation/decay. A chemical in SESOIL can partition in up to four phases (liquid, adsorbed, air, and pure). Data requirements for SESOIL are not extensive and utilize a minimum of AOC-specific soil and chemical parameters and monthly or seasonal meteorological values as input.

The SESOIL model output includes pollutant concentrations at various soil depths and pollutant loss from the unsaturated soil zone in terms of surface runoff, percolation to groundwater, volatilization, and degradation. The mathematical representations in SESOIL generally consider the rate at which the modeled processes occur, the interaction of different processes with each other, and the initial conditions of the waste area and the surrounding subsurface matrix material.

The input data for SESOIL can be grouped into four data types: climatic, chemical, soil, and application. There are 61 separate parameters contained in these four data groups. Wherever possible, AOC-specific parameter values were used for modeling. However, certain parameters were not available for the source areas and were estimated based on pertinent scientific literature, geochemical investigations, and checks for consistency between model results and historical data. Conservative estimates were used when a range of values existed or parameter values were not available.

6.5.2.2 Climate Data

The climatic data file of SESOIL consists of an array of mean monthly temperature, mean monthly cloud cover fraction, average monthly relative humidity, average monthly reflectivity of the earth's surface (i.e., shortwave albedo), average daily evapotranspiration, monthly precipitation, mean number of storm events per month, mean duration of rainfall, and mean length of rainy season. The climatic data are presented in Table E-9 of Appendix E. The dataset was taken from the Youngstown National Weather Service Office weather station at the Youngstown–Warren Regional Airport in

Vienna, Ohio, as it was determined to be most appropriate in corresponding to the latitude and the longitude at Camp Ravenna.

Climate data from the Youngstown weather station did not have all of the necessary climatic parameters for the HELP model simulation. Accordingly, the water balance evaluation presented in Section 6.2.4 was based on the nearest available weather station data with all necessary coefficients stored within the HELP model (Cleveland, Ohio). Inputs for the SESOIL model (Youngstown station) and HELP model (Cleveland station) produced virtually the same recharge rate (9.40 cm/yr for Cleveland and 9.42 cm/yr for Youngstown) for each location. Therefore, the use of the two different weather station datasets did not impact modeling results.

6.5.2.3 Chemical Data

The pollutant fate cycle of SESOIL focuses on various chemical transport and transformation processes that may occur in the soil zone. These processes include volatilization/diffusion, adsorption/desorption, cation exchange, biodegradation and hydrolysis, and metal complexation. The chemical-specific parameters used for SESOIL are presented in Appendix E (Table E-10). The distribution coefficients (K_ds) for inorganic chemicals were obtained from the *Soil Screening Guidance: Technical Background Document,* assuming a neutral pH of 7, unless otherwise stated (USEPA 1996b). The K_ds for organic chemicals were estimated from organic, carbon-based K_{oc} using the relationship $K_d = (f_{oc})(K_{oc})$, where f_{oc} = mass fraction of the organic carbon soil content obtained from AOC-specific measurements. K_{oc} values were obtained from *Soil Screening Guidance: Technical Background Document* (USEPA 1996b), unless otherwise stated. In general, biodegradation rates are not applicable for inorganic CMCOPCs and biodegradation was not considered for the organic chemicals in this evaluation.

6.5.2.4 Soil Data

The soil data file of SESOIL contains input parameters describing the physical characteristics of the subsurface soil and is presented in Table 6-3. These parameters include soil bulk density, intrinsic permeability, soil disconnectedness index, soil porosity, organic carbon content, and cation exchange capacity. AOC-specific data were used from geotechnical samples collected at the AOC during the PBA08 RI (Table 5-4). There is, however, no measurement method for the soil disconnectedness index or a measured value of the Freundlich exponent. Soil disconnectedness index is a parameter that relates the soil permeability to the moisture content. Thus, SESOIL default values were used for these two parameters.

An average intrinsic permeability for the vadose zone, representing the unconsolidated zone above the water table, was calibrated using the percolation rate of 9.42 cm/yr (3.6 inches/year) as the calibration target. The model was calibrated against the percolation rate by varying the intrinsic permeability and keeping all other AOC-specific geotechnical parameters fixed. The final hydrogeologic parameter values used in this modeling are shown in Table 6-3. The soil porosity was set to the AOC-specific value. The intrinsic permeability, calibrated in SESOIL to the percolation rate

(determined from a water balance estimated in HELP), was found to match the AOC-specific measurements from geotechnical samples.

The soil disconnectedness index replaces the moisture retention curves (or characteristic curves) used by other unsaturated zone leaching models. SESOIL's User Guide defines this parameter to be the exponent relating the "wetting" and "drying" time-dependent permeability of soil to its saturated permeability (Hetrick and Scott 1993). This "one variable" approach of using soil disconnectedness index in SESOIL simplifies the data estimation process and reduces computational time. In addition, this parameter was calibrated for four different soil types ranging from sandy loam to clay (Hetrick et. al. 1986), and calibrated values fell within the default range specified in the SESOIL's User Guide.

6.5.2.5 Source Terms

Analytical data from surface and subsurface soil collected at the AOC were used as source terms for SESOIL modeling. All the samples collected at different depth intervals were compiled to provide a detailed loading option for the SESOIL model. The maximum soil concentrations for each CMCOPC, listed in Table 6-1, were used as source term concentrations for the SESOIL model.

6.5.2.6 Application Data

Four different layering schemes were developed for sample locations within the AOC due to varying thicknesses of the loading and leaching zones that are based on varying soil sample and groundwater depths throughout the AOC. Leaching zone thicknesses are based on distance from the deepest detection of a CMCOC to the water table based on the potentiometric surface map (Figure 3-1). Details of the model layers utilized in this modeling are presented in Table E-11 in Appendix E.

Each model was arranged in four layers. The top layer (Layer 1) for each model consisted of the loading zone. Layer 1 in all layering schemes was 0-1.0 ft bgs.

The thicknesses of Layers 2 and 3 varied between the models for each chemical but served as a leaching zone in each. The fourth layer (Layer 4) was 0.5 ft thick and did not contain sublayers. Layer 4 was included just above the water table to read output results at the water table/vadose zone interface (i.e., leachate concentration entering groundwater).

For the selenium model, Layers 2 and 3 served as a leaching zone in the 13-ft thick vadose zone. For the 2,6-DNT; 4-amino-2,6-DNT; 2-methylnaphthalene; benz(a)anthracene; benzo(b)fluoranthene; benzo(a)pyrene; dibenz(a,h)anthracene; and indeno(1,2,3-cd)pyrene models, Layers 2 and 3 served as a leaching zone in the 12-ft thick vadose zone. For the 3-nitrotoluene model, Layers 2 and 3 served as a leaching zone in the 10-ft thick vadose zone. For the 2-amino-4,6-DNT; 2-nitrotoluene; naphthalene; and silver models, Layers 2 and 3 served as a leaching zone in the 9-ft thick vadose zone. In each of these models, Layer 4 was included just above the water table to read output results at the water table/vadose zone interface (i.e., leachate concentration entering groundwater).

6.5.3 SESOIL Modeling Results

SESOIL modeling was performed for initial CMCOPCs [2,6-DNT; 2-amino-4,6-DNT; 4-amino-2,6-DNT; 2-methylnaphthalene; 2-nitrotoluene; 3-nitrotoluene; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; naphthalene; selenium; and silver] that have the potential to reach the water table within 1,000 years based on the soil screening analysis results (Table 6-1). Table 6-4 presents the predicted peak leachate concentrations beneath the source areas relative to the discrete sample locations and ISM areas corresponding to the time of peak leachate concentrations. The Resident Adult FWCUGs, RVAAP facility-wide background concentrations, and MCL/RSL values for the CMCOPCs, if available, are also shown in this table for comparison purposes. Benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; and indeno(1,2,3-cd)pyrene were eliminated as a final CMCOPC based on the results of the SESOIL modeling, as the leachate below the source and just above the water table was below its screening criterion. The remaining SRCs were selected as final CMCOPCs. Figures E-5 through E-13 in Appendix E show the leachate mass flux versus time plots generated by SESOIL.

Selenium, silver, 2-nitrotoluene, 2,6-DNT, 2-amino-4,6-DNT, 3-nitrotoluene, 4-amino-2,6-DNT, 2-methylnaphthalene, and naphthalene were identified as the final soil CMCOPCs based on SESOIL results for each sample location within the AOC where the leachate concentration exceeded its screening criteria.

6.5.4 AT123D Modeling in the Saturated Zone

The fate and transport processes accounted for in the AT123D model include advection, dispersion, adsorption/retardation, and decay. This model can be used as a tool for estimating the dissolved concentration of a chemical in three dimensions in the groundwater, resulting from a mass release over a source area (point, line, area, or volume source). The model can handle instantaneous, as well as continuous, source loadings of CMCOPC concentrations. AT123D is frequently used by the scientific and technical community to perform quick and conservative estimates of groundwater plume movements in space and time. SESOIL and AT123D are linked in a software package (RISKPRO) so that mass loading to the groundwater predicted by SESOIL can be transferred directly to AT123D. Therefore, AT123D was chosen to predict the maximum concentration of contaminants in groundwater after mixing with the leachate and the future concentrations for the contaminants in groundwater at the receptor locations.

The hydrogeologic parameter values used in this modeling are shown in Table 6-3. Most of the parameters presented in this table are AOC-specific values, unless otherwise indicated. The chemical-specific parameters used for AT123D are presented in Appendix E (Table E-12). A discussion of model assumptions and limitations is presented in Section 6.5.6.

Selenium, silver, 2-nitrotoluene, 2,6-DNT, 2-amino-4,6-DNT, 3-nitrotoluene, 4-amino-2,6-DNT, 2-methylnaphthalene, and naphthalene were identified as the final soil CMCOPCs based on SESOIL

results for each sample location within the AOC where the leachate concentration exceeded its screening criteria.

Barium, chromium, copper, lead, mercury, selenium, 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene were identified as final CMCOPCs based on the sediment screening analysis. Figure 6-5 presents the locations of the soil and sediment samples where the final CMCOPCs exist. Figures E-14 through E-35 show the predicted concentration versus time curves based on AT123D modeling.

6.5.5 AT123D Modeling Results

Results of AT123D modeling for final soil and sediment CMCOPCs are shown in Table 6-5. The results show predicted groundwater concentrations for CMCOPCs beneath the source area and at the selected downgradient receptor locations [i.e., unnamed tributary to Sand Creek (flowing northwest), unnamed tributary to Cobbs Ponds (flowing northeast) and an unnamed tributary to the Mahoning River (flowing southwest)]. Observed groundwater concentrations from AOC monitoring wells are included in Table 6-5; however, it should be noted that these wells may not exist near the sample location with the maximum concentration and should not be considered in direct correlation. The observed groundwater concentrations were added for comparison, not for screening criteria. The distances to the downgradient receptors were based on the distance along the groundwater flow direction to the closest surface water body.

Based on the flow direction shown in Figure 3-1, the unnamed tributary to Sand Creek was chosen as the downgradient receptor for ISM areas ASYss-084M-SO (selenium), ASYss-088M-SO (naphthalene and 2-methylnaphthalene), and ASYss-093M-SO (3-nitrotoluene) at a distance of 2,560 ft; 2,720 ft; and 2,880 ft, respectively. The unnamed tributary to the Mahoning River was selected as the downgradient receptor for ASYss-018M-SO (2-nitrotoluene, 2-amino-4,6-DNT, and silver) at a distance of 2,720 ft. The unnamed tributary to Cobbs Ponds was also considered as a receptor for the areas where the final CMCOPCs existed in soil because it was closer than the unnamed tributary to Sand Creek. Multiple receptors were considered because a groundwater divide occurs in this vicinity and even though Figure 3-1 shows a westerly flow direction, the facility-wide potentiometric surface shows an easterly flow direction. The unnamed tributary to Cobbs Ponds was the downgradient receptor for the sediment sample locations at a distance of 2,080 ft.

For final soil CMCOPCs, the maximum predicted concentrations of selenium and silver in groundwater were not predicted to exceed the screening criteria beneath the source area and were eliminated as CMCOCs. The maximum predicted concentrations of 2-nitrotoluene, 3-nitrotoluene, 2,6-DNT, 2-amino-4,6-DNT, 4-amino-2,6-DNT, 2-methylnaphthalene, and naphthalene were predicted to exceed the screening criteria in groundwater beneath the source area and were; therefore, modeled to the downgradient receptors [i.e., unnamed tributary to Sand Creek (flowing northwest) and unnamed tributary to the Mahoning River (flowing southwest)]. The identified sediment CMCOPCs [barium, chromium, copper, lead, mercury, selenium, 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene] were also predicted by analytical solutions to exceed

screening criteria in groundwater beneath their source and were retained for lateral transport modeling to downgradient receptors [i.e., unnamed tributary to Cobbs Ponds (flowing northeast)].

Lateral transport modeling showed the maximum predicted concentrations of final soil CMCOPCs did not exceed the screening criteria at their downgradient receptor location [i.e., unnamed tributary to Sand Creek (flowing northwest) and unnamed tributary to the Mahoning River (flowing southwest)]. Likewise, maximum predicted concentrations of final sediment CMCOPCs did not exceed screening criteria at their downgradient receptor [i.e., unnamed tributary to Cobbs Ponds (flowing northeast)]. However, the seven final soil CMCOPCs (2-nitrotoluene, 3-nitrotoluene, 2,6-DNT, 2-amino-4,6-DNT, 4-amino-2,6-DNT, 2-methylnaphthalene, and naphthalene) and the 13 final sediment CMCOPCs [barium, chromium, copper, lead, mercury, selenium, 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene] exceeded screening criteria in groundwater beneath their respective source areas and were retained for further evaluation.

6.5.6 Limitations/Assumptions

In general, a conservative modeling approach was used, which may overestimate the contaminant concentration in the leachate for migration from observed soil concentrations. Listed below are important assumptions used in this analysis:

- Chemical and biological degradation rates for organic CMCOPCs were not considered in the SESOIL and AT123D models.
- Using K_d and R to describe the reaction term of the transport equation assumes that an equilibrium relationship exists between the solid-phase and solution-phase concentrations and that the relationship is linear and reversible.
- Since AOC-specific data are not available, the K_d and K_{oc} values used in this analysis for all CMCOPCs represent literature or calculated values and may not represent conditions at the AOC.
- The K_d for inorganic chemicals used here assumed a pH of 6.8 [i.e., the middle value in the USEPA's evaluation presented in the soil screening guidance document (USEPA 1996b)]. The K_d for inorganic chemicals varies with pH (generally decreasing with decreasing pH, although there are few exceptions); therefore, if AOC-specific pH measurements are greater or less than 6.8, the K_d and calculated screening parameters (such as R) will deviate from those presented here.
- Flow and transport in the vadose zone is one-dimensional (i.e., only in the vertical direction).
- This modeling used the current soil concentrations that were collected approximately 65 years after historical operations were terminated at the AOC. Therefore, it does not account for constituents that have already leached to groundwater.
- Flow and transport are not affected by density variations.
- A realistic distribution of soil contamination was not considered. The maximum concentration value was used as the source term concentrations for SESOIL model layers; this is a highly conservative assumption that is expected to produce higher

leachate concentrations for the CMCOPCs than the average condition. The horizontal distribution of soil contamination was assumed based on concentration levels from nearby sample locations as opposed to taking into account the entire area.

- The water balance represents an overall average rainwater recharge and assumes an even distribution of infiltration in the modeled area. An average water balance assumes some areas will have higher or lower recharge based on the heterogeneity of the soil and varying topography.

The inherent uncertainties associated with using these assumptions must be recognized. K_d values are highly sensitive to changes in the major chemistry of the solution phase. Therefore, it is important that the values be measured or estimated under conditions that will closely represent those of the contaminant plume. Deviations from actual AOC-specific parameter values from assumed literature values may significantly affect contaminant fate predictions. It is also important to note that the contaminant plume will change over time and will be affected by multiple solutes present at the AOC. The effects of heterogeneity and anisotropy are not addressed in these simulations.

The discrepancy between the contaminant concentrations measured in the field and the values predicted by the model could be investigated by performing sensitivity analyses on the model input parameters that have the most influence on the model predictions.

These parameters are: (1) biodegradation rate constants for organic chemicals; (2) saturated hydraulic conductivity; (3) soil porosity; (4) fraction of soil organic carbon-content (f_{oc}) for organic chemicals; (5) K_d for inorganic chemicals; and (6) longitudinal, transverse, and vertical dispersivity values. Generally, higher biodegradation rates will produce lower concentrations, and lower rates will produce higher concentrations for organic chemicals without impacting the results of the inorganic chemicals. Higher hydraulic conductivity and dispersivity causes higher advection and dispersion, thereby producing lower peaks near the source area, but increasing the migration distance. The reverse will be true with lower hydraulic conductivity and dispersivity values. Higher f_{oc} values have a similar effect on organic chemicals as higher K_d has on inorganic chemicals; they decrease chemical mobility and produce lower concentrations in groundwater.

AOC-specific groundwater data indicate the AT123D modeling results are conservative with respect to predicted concentrations of chemicals in groundwater beneath the sources. None of the final CMCOPCs in soil and sediment were detected in recent AOC groundwater samples collected from 2009-2012 (EQM 2010), except the metals (e.g., barium, chromium, copper, and lead) at concentrations below the screening criteria (Table 6-5). These data indicate soil and sediment sources are not currently impacting groundwater quality.

Predictive modeling for seven final soil CMCOPCs (2-nitrotoluene, 3-nitrotoluene, 2,6-DNT, 2-amino-4,6-DNT, 4-amino-2,6-DNT, 2-methylnaphthalene, and naphthalene) indicated they may exceed the screening criteria in groundwater beneath their respective source areas. Naphthalene and 2-methylnaphthalene, and 2,6-DNT modeling results did not indicate breakthrough in groundwater beneath the source at concentrations above MCLs or RSLs until over 100 years in the future even under conservative model assumptions that assume no chemical degradation. These results indicate

very high retardation in the soil matrices and it is likely these chemicals would degrade prior to mixing with groundwater.

The explosive compounds 2-nitrotoluene, 3-nitrotoluene, 2-amino-4,6-DNT, and 4-amino-2,6-DNT modeling results indicate concentrations in groundwater beneath the source areas would exceed MCLs or RSLs at about 30 years or less with peak concentrations occurring at approximately 50 years or less. Therefore, these chemicals should have already been detected in the existing groundwater. However, none of these explosive compounds have been detected in the AOC groundwater samples. Therefore, it may be concluded that the model predicted concentrations are highly conservative and would potentially be below their screening levels had site-specific biodegradation rates been determined and used by the groundwater models (SESOIL and AT123D). Considering activities at Atlas Scrap Yard occurred from1945-1970, detectable concentrations of chemicals near or above MCLs or RSLs are predicted by the models. However, the predicted concentrations are conservative based on current groundwater monitoring data for the AOC, in which none of these chemicals were detected except for the metals. All the metals detected in groundwater were detected at concentrations below screening criteria. These data indicate retardation and degradation are higher than accounted for by the modeling results and potential impacts to groundwater are mitigated by these factors. Predictive modeling for final sediment CMCOPCs [barium, chromium, copper, lead, mercury, selenium, 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene] show peak concentrations in groundwater beneath the source would occur very quickly (< 20 years). Considering the timeline of Atlas Scrap Yard activities, peak concentrations likely occurred in the past and modeling results do not indicate potential future impacts.

None of the final soil CMCOPCs predicted to exceed screening criteria in groundwater beneath the sources were identified as COCs for soil in the HHRA (Section 7.0). Likewise, none of the sediment CMCOPCs modeled using AT123D were identified as COCs for sediment in the HHRA. Groundwater wells are nearby potential groundwater sources at this AOC; however, additional wells by the ASA may be considered. Potential additional investigation under the Facility-wide Groundwater AOC may be warranted, but based on review of the screening and modeling results, along with the WOE factors noted above, none of the identified CMCOCs are impacting groundwater at Atlas Scrap Yard and do not warrant further evaluation of source removal in an FS.

6.6 SUMMARY AND CONCLUSIONS

Inorganic and organic SRCs exist in surface soil, subsurface soil, and sediment at Atlas Scrap Yard. These SRCs were further evaluated to determine if residual concentrations in soil and sediment may potentially impact groundwater quality and warrant evaluation in an FS. Evaluation of modeling results with respect to current AOC groundwater data and model limitations indicated identified soil SRCs are not currently impacting groundwater beneath the source areas and that predicted future impacts would be mitigated by factors such as chemical and biological degradation and lateral dispersivity. All SRCs identified in surface and subsurface soil at Atlas Scrap Yard were evaluated through the stepwise fate and transport evaluation and were eliminated as posing future impacts to groundwater.

A sediment screening analysis was performed for sediment samples at the AOC. An AOC-specific DAF was calculated using a co-located surface water and sediment concentrations for identified sediment SRCs. These DAFs were used in the sediment screening analysis to identify CMCOPCs for predictive modeling and further evaluation. Results for the sediment screening analysis and modeling eliminated all SRCs in sediment as posing future impacts to groundwater at Atlas Scrap Yard.

Based on review of the screening and modeling results, along with WOE factors, none of the identified CMCOCs for soil or sediment are impacting groundwater at Atlas Scrap Yard and do not warrant further evaluation of source removal in a FS.

Table 6-1. Initial CMCOPCs Evaluated with SESOIL Modeling

SRCs	Maximum Concentrations (mg/kg)	ISM Area or Discrete Sample Location	Sample Depth (ft bgs)	Leachate Modeling? (Yes/No)
Inorganic Chemicals				
Selenium	2.90E+00	ASYss-084M-5758-SO	0.0 - 1.0	Yes
Silver	5.20E+00	ASYss-018M-SO	0.0 - 1.0	Yes
Organic Chemicals - Explosive				
2,6-Dinitrotoluene	1.30E-01	ASYss-076M-5750-SO	0.0 - 1.0	Yes
2-Amino-4,6-Dinitrotoluene	1.00E-01	ASYss-018M-SO	0.0 - 1.0	Yes
4-Amino-2,6-Dinitrotoluene	2.10E-01	ASYss-080M-5754-SO	0.0 - 1.0	Yes
2-Nitrotoluene	4.30E-01	ASYss-018M-SO	0.0 - 1.0	Yes
3-Nitrotoluene	1.20E-01	ASYss-093M-5767-SO	0.0 - 1.0	Yes
Organic Chemicals - Semi-volatile				
2-Methylnaphthalene	2.20E+00	ASYss-088M-5756-SO	0.0 - 1.0	Yes
Benz(a)anthracene	1.70E+01	ASYss-078M-5752-SO	0.0 - 1.0	Yes
Benzo(a)pyrene	2.00E+01	ASYss-080M-5754-SO	0.0 - 1.0	Yes
Benzo(b)fluoranthene	3.70E+01	ASYss-078M-5752-SO	0.0 - 1.0	Yes
Dibenz(a,h)anthracene	5.10E+00	ASYss-080M-5754-SO	0.0 - 1.0	Yes
Indeno(1,2,3-cd)pyrene	1.30E+01	ASYss-080M-5754-SO	0.0 - 1.0	Yes
Naphthalene	1.40E+00	ASYss-088M-5756-SO	0.0 - 1.0	Yes

ft bgs = Feet below ground surface,
ISM = Incremental Sampling Method.
mg/kg = Milligrams per kilogram.
SRC = Site-related contaminant.

Table 6-2. Calculated Sample-specific DAFs for Atlas Scrap Yard

Analyte	Sediment Concentration (mg/kg)	Sediment and Surface Water Sample Location	K_d (L/kg)	Reference	Maximum Groundwater Concentration (mg/L)[a]	Co-located Surface Water Concentration (mg/L)	DAF[b]
Inorganic Chemicals							
Beryllium	7.40E-01	L12sd-308/L12sw-308	7.90E+02	c	9.37E-04	1.20E-03	1
Cadmium	5.10E-01	L12sd-308/L12sw-308	7.50E+01	c	6.80E-03	1.20E-03	6
Nickel	1.82E+01	L12sd-308/L12sw-308	6.50E+01	c	2.80E-01	2.44E-02	11
Organic chemicals - Semi-volatile							
Benz(a)anthracene	3.50E-01	L12sd-308/L12sw-308	1.77E+05	d	1.98E-06	2.40E-04	1
Benzo(a)pyrene	4.10E-01	L12sd-308/L12sw-308	5.87E+05	d	6.98E-07	2.20E-04	1
Benzo(b)fluoranthene	6.80E-01	L12sd-308/L12sw-308	5.99E+05	d	1.13E-06	3.20E-04	1
Chrysene	4.60E-01	L12sd-308/L12sw-308	1.81E+05	d	2.55E-06	2.20E-04	1
Fluoranthene	6.80E-01	L12sd-308/L12sw-308	5.55E+04	d	1.23E-05	4.60E-04	1
Pyrene	5.40E-01	L12sd-308/L12sw-308	5.43E+04	d	9.94E-06	3.30E-04	1

As there were no co-located sediment and surface water data for Atlas Scrap Yard, the sample-specific DAF was calculated based on sediment and surface water concentration data from location L12-308 near Atlas Scrap Yard. Sample data for location L12-308 was taken on 2/15/2010. Sediment samples were taken from a depth of 0.0-0.5 ft bgs.

[a] Maximum groundwater concentration = maximum sediment concentration divided by the distribution coefficient.

[b] DAFs were calculated by dividing the calculated groundwater concentration by the co-located surface water concentration.

[c] USEPA 1996b. *Soil Screening Guidance: Technical Background Document*. Office of Solid Waste and Emergency Response, Washington, D.C. May 1996.

[d] USEPA 2012. EPA Regional Screening Level. Website: http://www.epa.gov/reg3hwmd/risk/human/rb-concentration_table/index.htm (November 2012).

DAF = Dilution Attenuation Factor.

Kd = Distribution Coefficient.

L/kg = Liters per kilogram.

mg/kg = Milligrams per kilogram.

mg/L =Milligrams per liter.

Table 6-3. Unit-specific Parameters Used in SESOIL and AT123D Modeling

Parameters	Symbol	Units	Value	Source for Value
SESOIL				
Percolation Rate (Recharge Rate)	q	m/year	9.42E-02	0.1 SESOIL precipitation for Youngstown, Ohio
Horizontal Area of Aggregate	A_p	cm^2	ISM Specific	Sample specific
Intrinsic Permeability	p	cm^2	1.05E-10	Calibrated from SESOIL model
Disconnectedness Index	c	unitless	11	Calibrated from SESOIL model
Freundlich Equation Exponent	n	unitless	1	SESOIL default
Fraction Organic Carbon	f_{oc}	unitless	2.60E-03	Average from the PBA08 RI Geotechnical Samples ASYSB-051-5684-SO, ASYSB-051-5685-SO, ASYSB-055-5700-SO, and ASYSB-055-5701-SO
Bulk Density	ρb	kg/L	1.75	
Moisture Content	w	wt %	19.6	
Water-filled Soil Porosity	θw	unitless	0.343	
Air-filled Soil Porosity	θa	unitless	0.016	
Porosity - total	n_T	unitless	0.359	
Vadose Zone Thickness	Vz	m	2.7-4.0	Average depth to water from potentiometric surface map (Figure 6-4)
Leaching Zone Thickness	Lz	m	2.4-3.7	Based on distance from the deepest detection of a CMCOC to the water table from potentiometric surface map (Figure 6-4)
AT123D				
Aquifer Thickness	h	m	6	Facility-wide assumption for the unconsolidated aquifer presented the Load Line 1 investigation (USACE 2003a)
Hydraulic Conductivity in Saturated Zone	K_S	cm/s	3.89E-04	Average from slug test results from Atlas Scrap Yard monitoring wells (MKM 2007)
Hydraulic Gradient	i	unitless	4.60E-03	Average gradient determined from Figure 6-4
Effective porosity	n_e	unitless	0.2	Assumed for sandstone (USEPA 1985)
Dispersivity, longitudinal	α_L	m	30	Assumed
Dispersivity, transverse	α_T	m	3	0.1 α_L
Dispersivity, vertical	α_V	m	0.3	0.01 α_L
Retardation factor	R	unitless	chemical-specific	Presented in Table E-7 in Appendix E

MKM 2007. Characterization of 14 AOCs at Ravenna Army Ammunition Plant (March 2007).
USACE 2003a. Phase II Remedial Investigation Report for the Load Line 1 at the Ravenna Army Ammunition Plant, Ravenna, Ohio. June 2003.
USEPA (United States Environmental Protection Agency) 1985. Water Quality Assessment: A Screening Procedure for Toxic and Conventional Pollutants in Surface and Ground Water, Revised 1985 Parts 1 and 2, EPA/600/6-85/002. Office of Research and Development, Environmental Research Laboratory, Athens, Georgia. September 1985.
AT123D = Analytical Transient 1-,2-,3-Dimensional model.
cm^2 = Square centimeters.
CMCOC = Contaminant Migration Chemical of Concern.
cm/s = Centimeters per second.
FWGWMP = Facility-Wide Groundwater Monitoring Program.
ISM = Incremental Sampling Method.
kg/L = Kilograms per liter.
m = Meter.
m/yr = Meters per year.
PBA08 RI = Performance Based Acquisition 2008 Remedial Investigation.
SESOIL = Seasonal Soil Compartment Model.
wt % = Weight by percent.

THIS PAGE INTENTIONALLY LEFT BLANK.

Table 6-4. Summary of SESOIL Modeling Results

Initial CMCOPC	Maximum Soil Concentration (mg/kg)	ISM Area or Discrete Sample Location	Maximum Depth of Contamination (ft bgs)	Depth to Groundwater (ft bgs)	Predicted ($C_{L, max}$) Beneath the Source (mg/L)	Time Required to Reach ($C_{L, max}$) (years)	MCL/RSL (mg/L)	Resident Farmer Adult FWCUG[a] (mg/L)	Facility-Wide Background Unconsolidated Groundwater (mg/L)	Final CMCOPC?[b] (Yes/No)
Inorganic Chemicals										
Selenium	**2.90E+00**	**ASYss-084M-5758-SO**	**1.0**	**13.0**	**8.83E-02**	**187**	**5.00E-02**	**None**	**0.00E+00**	**Yes**
Silver	**5.20E+00**	**ASYss-018M-SO**	**1.0**	**9.0**	**1.46E-01**	**209**	**7.10E-02**	**None**	**0.00E+00**	**Yes**
Organic Chemicals - Explosives										
2,6-Dinitrotoluene	**1.30E-01**	**ASYss-076M-5750-SO**	**1.0**	**12.0**	**1.39E-02**	**57**	**1.50E-02**	**1.22E-04**	**None**	**Yes**
2-Amino-4,6-Dinitrotoluene	**1.00E-01**	**ASYss-018M-SO**	**1.0**	**9.0**	**2.66E-02**	**23**	**3.00E-02**	**7.30E-04**	**None**	**Yes**
4-Amino-2,6-Dinitrotoluene	**2.10E-01**	**ASYss-080M-5754-SO**	**1.0**	**12.0**	**4.26E-02**	**30**	**3.00E-02**	**7.30E-04**	**None**	**Yes**
2-Nitrotoluene	**4.30E-01**	**ASYss-018M-SO**	**1.0**	**9.0**	**7.29E-02**	**28**	**2.70E-04**	**3.70E-04**	**None**	**Yes**
3-Nitrotoluene	**1.20E-01**	**ASYss-093M-5767-SO**	**1.0**	**10.0**	**2.41E-02**	**31**	**1.30E-03**	**None**	**None**	**Yes**
Organic Chemicals - Semi-volatiles										
2-Methylnaphthalene	**2.20E+00**	**ASYss-088M-5756-SO**	**1.0**	**12.0**	**4.80E-02**	**216**	**2.70E-02**	**None**	**None**	**Yes**
Benz(a)anthracene	1.70E+01	ASYss-078M-5752-SO	1.0	12.0	0.00E+00	>1000	2.90E-05	4.00E-06	None	No
Benzo(a)pyrene	2.00E+01	ASYss-080M-5754-SO	1.0	12.0	0.00E+00	>1000	2.00E-04	2.30E-07	None	No
Benzo(b)fluoranthene	3.70E+01	ASYss-078M-5752-SO	1.0	12.0	0.00E+00	>1000	2.90E-05	2.00E-06	None	No
Dibenz(a,h)anthracene	5.10E+00	ASYss-080M-5754-SO	1.0	12.0	0.00E+00	>1000	2.90E-06	1.50E-07	None	No
Indeno(1,2,3-cd)pyrene	1.30E+01	ASYss-080M-5754-SO	1.0	12.0	0.00E+00	>1000	2.90E-05	2.00E-06	None	No
Naphthalene	**1.40E+00**	**ASYss-088M-5756-SO**	**1.0**	**9.0**	**6.58E-02**	**102**	**1.40E-04**	**None**	**None**	**Yes**

[a] The Resident Adult FWCUG is based on a target risk of 10^{-6} and a Hazard Index of 0.1.
[b] The Final CMCOPC was identified comparing predicted maximum leachate concentration to MCL/RSL, Resident Adult FWCUGs, and facility-wide background concentrations. A constituent is a CMCOPC if its predicted leachate concentration exceeds its MCL/RSL within 1,000 years.
ft bgs = Feet below ground surface.
$C_{L, max}$ = maximum leachate concentration
CMCOPC = Contaminant migration chemical of potential concern.
FWCUG = Facility-Wide Cleanup Goal.
ISM = Incremental sampling method.
MCL = Maximum contaminant level.
mg/kg = Milligram per kilogram.
mg/L = Milligram per liter.
PCB = Polychlorinated biphenyl.
RSL = Regional Screening Level.
SESOIL = Seasonal soil compartment model.
Bold = CMCOPCs exceeding MCL/RSL, Resident Adult FWCUGs, and facility-wide background concentrations.

Table 6-5. Summary of AT123D Modeling Results

Final CMCOPC	Predicted Maximum Leachate Concentration[a] ($C_{L, max}$) (mg/L)	Predicted Maximum Groundwater Concentrations[b] Beneath the Source ($C_{S, max}$) (mg/L)	Predicted Maximum Groundwater Concentrations[b] at the Downgradient Receptor ($C_{R,max}$) (mg/L)	Distance to Downgradient Receptor (ft)	Observed Maximum Groundwater Concentration[c] (mg/L)	MCL/RSL (mg/L)	Resident Farmer Adult FWCUG[d] (mg/L)	Facility-Wide Background Unconsolidated Groundwater (mg/L)	Identified CMCOC for Further Evaluation?[e] (Yes/No)
Final CMCOPCs in Soil									
Inorganic Chemicals									
Selenium	8.83E-02	4.21E-02	0.00E+00	2,560	ND	5.00E-02	None	0.00E+00	No
Silver	1.46E-01	4.17E-02	0.00E+00	2,720	ND	7.10E-02	None	0.00E+00	No
Organic Chemicals – Explosives									
2,6-Dinitrotoluene	1.39E-02	4.00E-03	0.00E+00		ND	1.50E-02	1.22E-04	None	Yes
2-Amino-4,6-dinitrotoluene	2.66E-02	7.61E-03	4.12E-07	2,720	ND	3.00E-02	7.30E-04	None	Yes
2-Nitrotoluene	7.29E-02	2.04E-02	3.49E-08	2,720	ND	2.70E-04	3.70E-04	None	Yes
3-Nitrotoluene	2.41E-02	1.17E-02	1.92E-07	2,880	ND	1.30E-03	None	None	Yes
4-Amino-2,6-dinitrotoluene	4.26E-02	1.56E-02	3.63E-05	2080	ND	3.00E-02	7.30E-04	ND	Yes
Organic Chemicals – Semi-Volatile									
2-Methylnaphthalene	4.8E-02	2.92E-02	0.00E+00	2,720	ND	2.70E-02	None	None	Yes
Naphthalene	6.58E-02	3.00E-02	0.00E+00	2720	ND	1.40E-04	None	None	Yes
Final CMCOPCs in Sediment[f]									
Inorganic Chemicals									
Barium	3.41E+00	3.39E+00	0.00E+00	2,080	5.44E-02	2.00E+00	1.47E-03	0.00E+00	Yes
Chromium	1.05E+00	1.03E+00	0.00E+00	2,080	1.02E-02	1.00E-01	8.81E-03	7.30E-03	Yes
Copper	1.41E+00	1.39E+00	0.00E+00	2,080	1.25E-02	1.30E+00	None	0.00E+00	Yes
Lead	6.73E-02	6.69E-02	0.00E+00	2,080	5.30E-03	1.50E-02	None	0.00E+00	Yes
Mercury	2.69E-03	2.68E-03	0.00E+00	2,080	ND	2.00E-03	None	0.00E+00	Yes
Selenium	5.40E-01	5.38E-01	0.00E+00	2,080	ND	5.00E-02	None	0.00E+00	Yes
Organic Chemicals – Explosives									
2-Amino-4,6-Dinitrotoluene	1.09E-01	1.07E-01	0.00E+00	2,080	ND	3.00E-02	7.30E-04	None	Yes
Organic Chemicals – Semi-Volatile									
Benz(a)anthracene	7.61E-04	7.58E-04	0.00E+00	2,080	ND	2.90E-05	4.00E-06	None	Yes
Benzo(a)pyrene	2.68E-04	2.65E-04	0.00E+00	2,080	ND	2.00E-04	2.30E-07	None	Yes
Benzo(b)fluoranthene	4.36E-04	4.34E-04	0.00E+00	2,080	ND	2.90E-05	2.00E-06	None	Yes
Dibenz(a,h)anthracene	1.71E-05	1.69E-05	0.00E+00	2,080	ND	2.90E-06	1.50E-07	None	Yes
Indeno(1,2,3-cd)pyrene	6.11E-05	6.10E-05	0.00E+00	2,080	ND	2.90E-05	2.00E-06	None	Yes
Naphthalene	8.24E-03	8.21E-03	0.00E+00	2,080	ND	1.40E-04	None	None	Yes

[a] Represents SESOIL predicted maximum leachate concentration just above the water table.
[b] The predicted concentration was estimated using the results from SESOIL and applying AT123D model.
[c] Observed groundwater concentrations were reported in the *RVAAP Facility-wide Groundwater Monitoring Program 2009 Annual Report* (EQM 2010) and sampling events through 2012.
[d] The FWCUG is based on a target risk of 10^{-6} and a Hazard Index of 0.1.
[e] The CMCOC was identified comparing predicted concentration in groundwater to MCL/RSL, FWCUGs, and facility-wide background concentrations. A constituent is a CMCOC if its predicted concentration in groundwater exceeds all its screening criteria within 1,000 years.
[f] Maximum groundwater concentration = maximum sediment concentration divided by the distribution coefficient.
AT123D = Analytical Transient 1-,2-,3-Dimensional
$C_{L, max}$ = maximum leachate concentration.
$C_{R,max}$ = maximum groundwater mixing concentration at closest downgradient receptor
$C_{S, max}$ = maximum groundwater mixing concentration beneath source
CMCOC = Contaminant Migration Contaminant of Concern.
CMCOPC = Contaminant Migration Contaminant of Potential Concern.
ft = Feet.
FWCUG = Facility-Wide Cleanup Goal.
MCL = Maximum Contaminant Level.
mg/kg = Milligram per kilogram.
mg/L = Milligram per liter.
ND = Not detected.
RSL = Regional Screening Level.
SESOIL = Seasonal Soil Compartment Model.

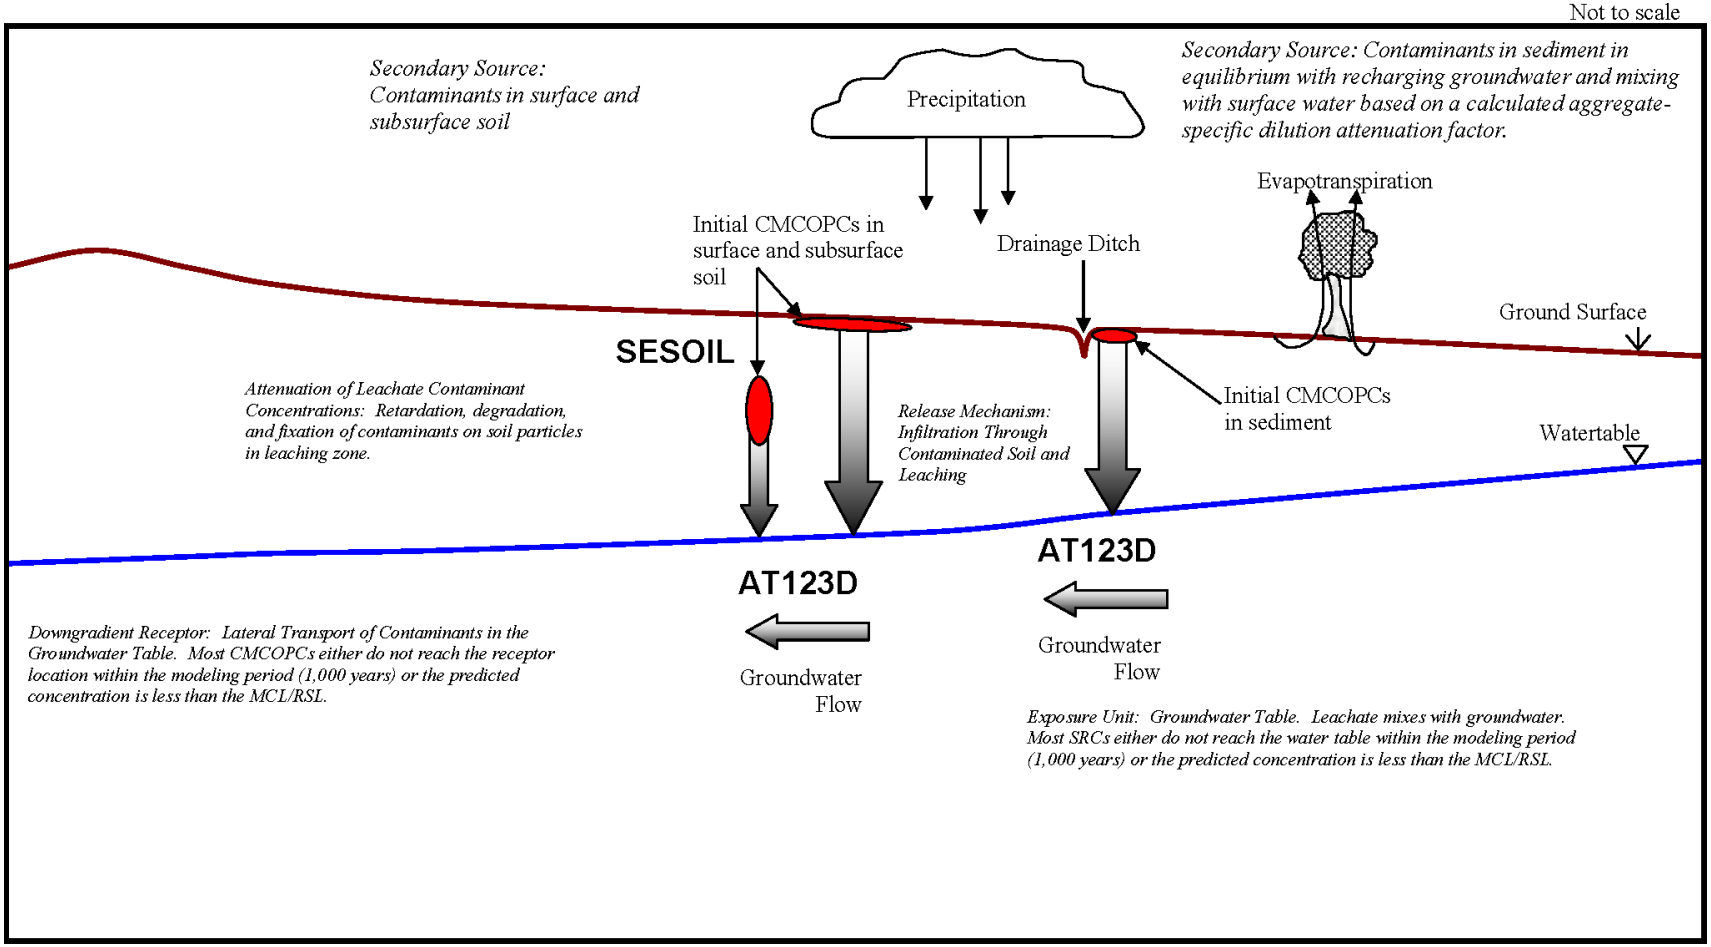


Figure 6–1. Contaminant Migration Conceptual Model

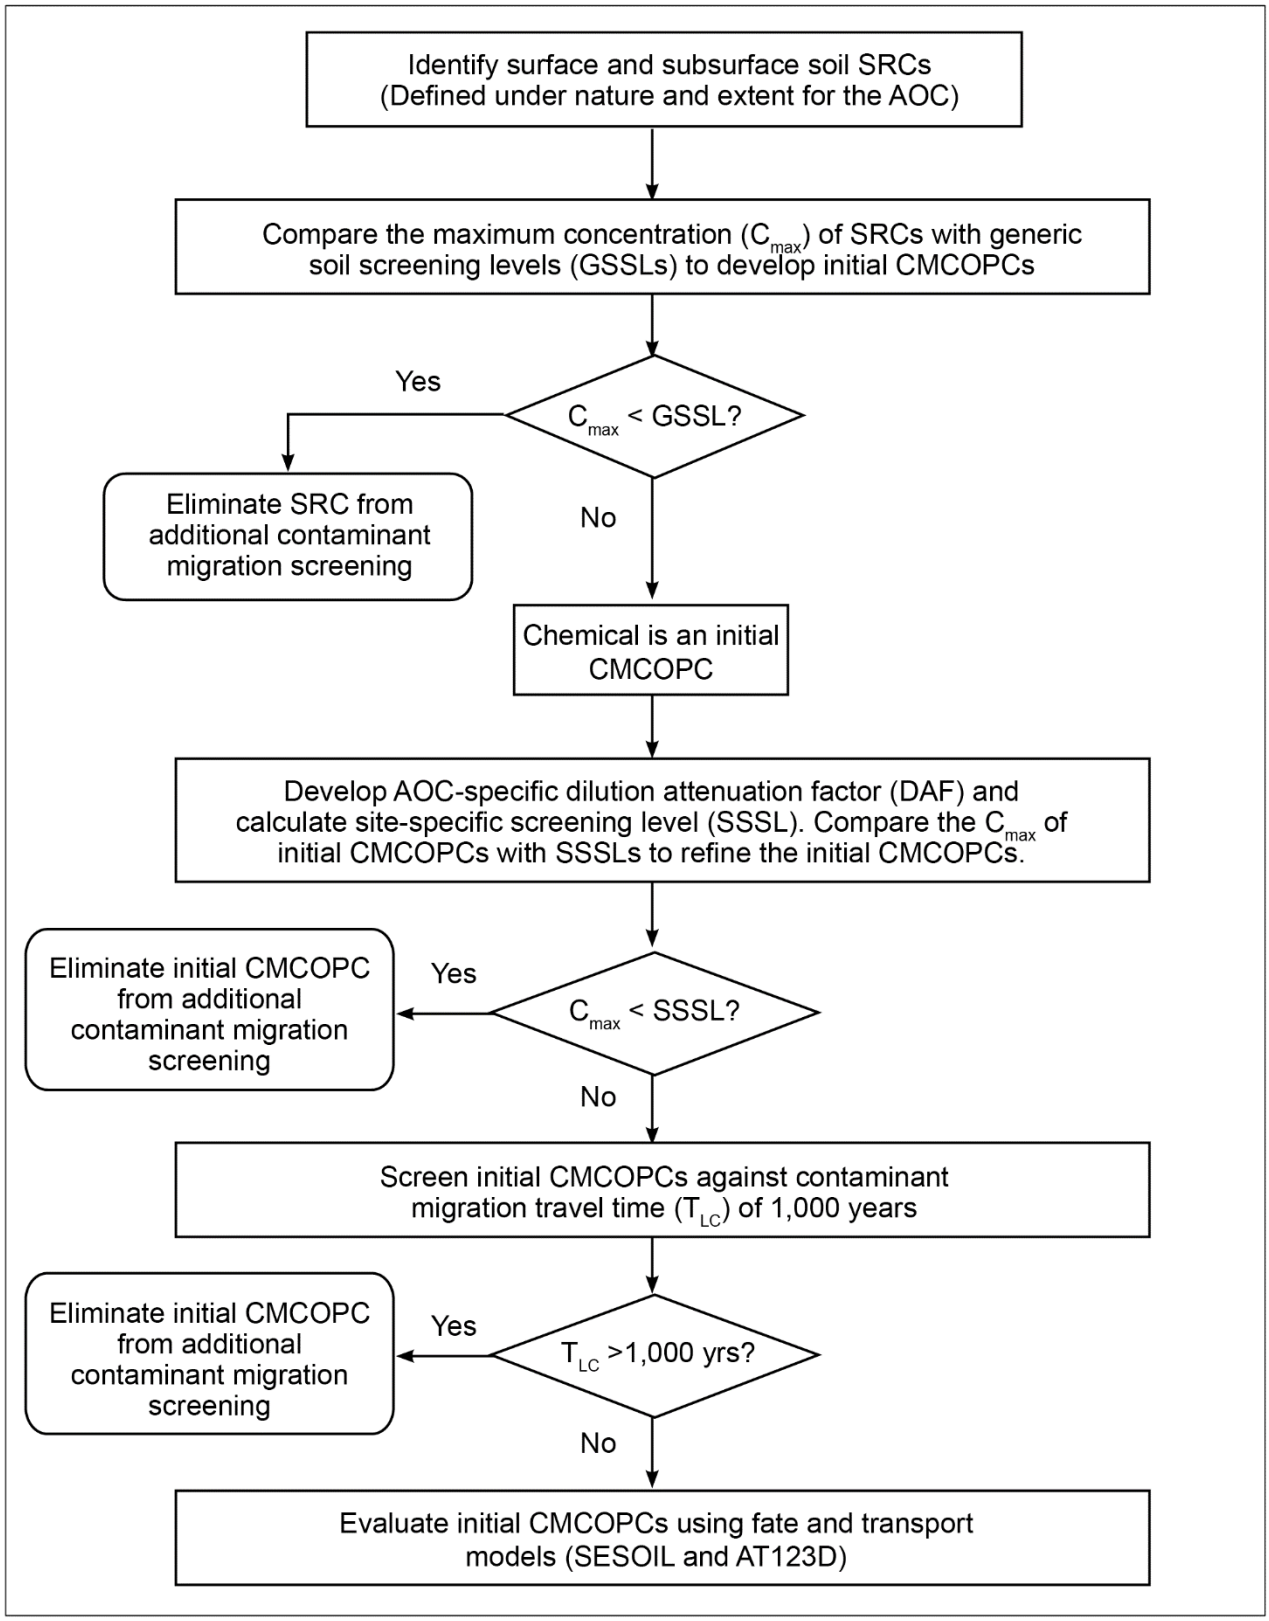


Figure 6–2. Initial CMCOPCs Identified in Soil Screening Analysis for SESOIL Evaluation

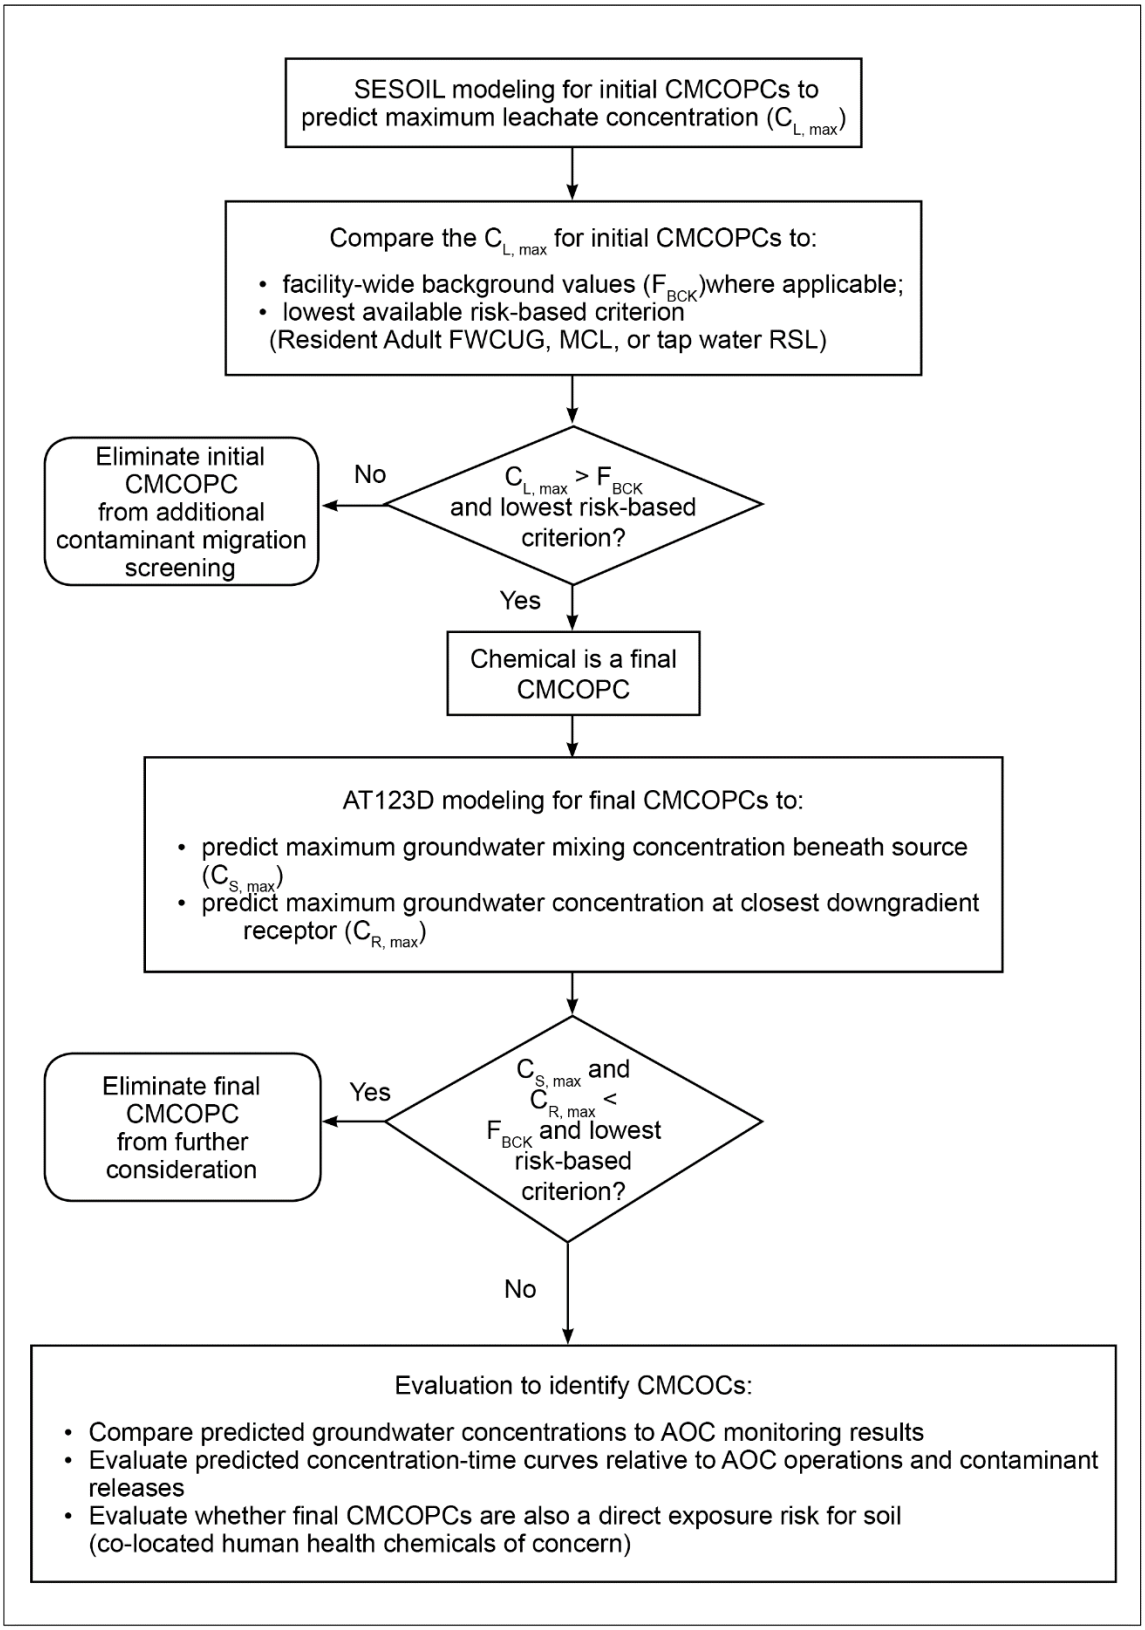


Figure 6-2. Initial CMCOPCs Identified in Soil Screening Analysis for SESOIL Evaluation (continued)

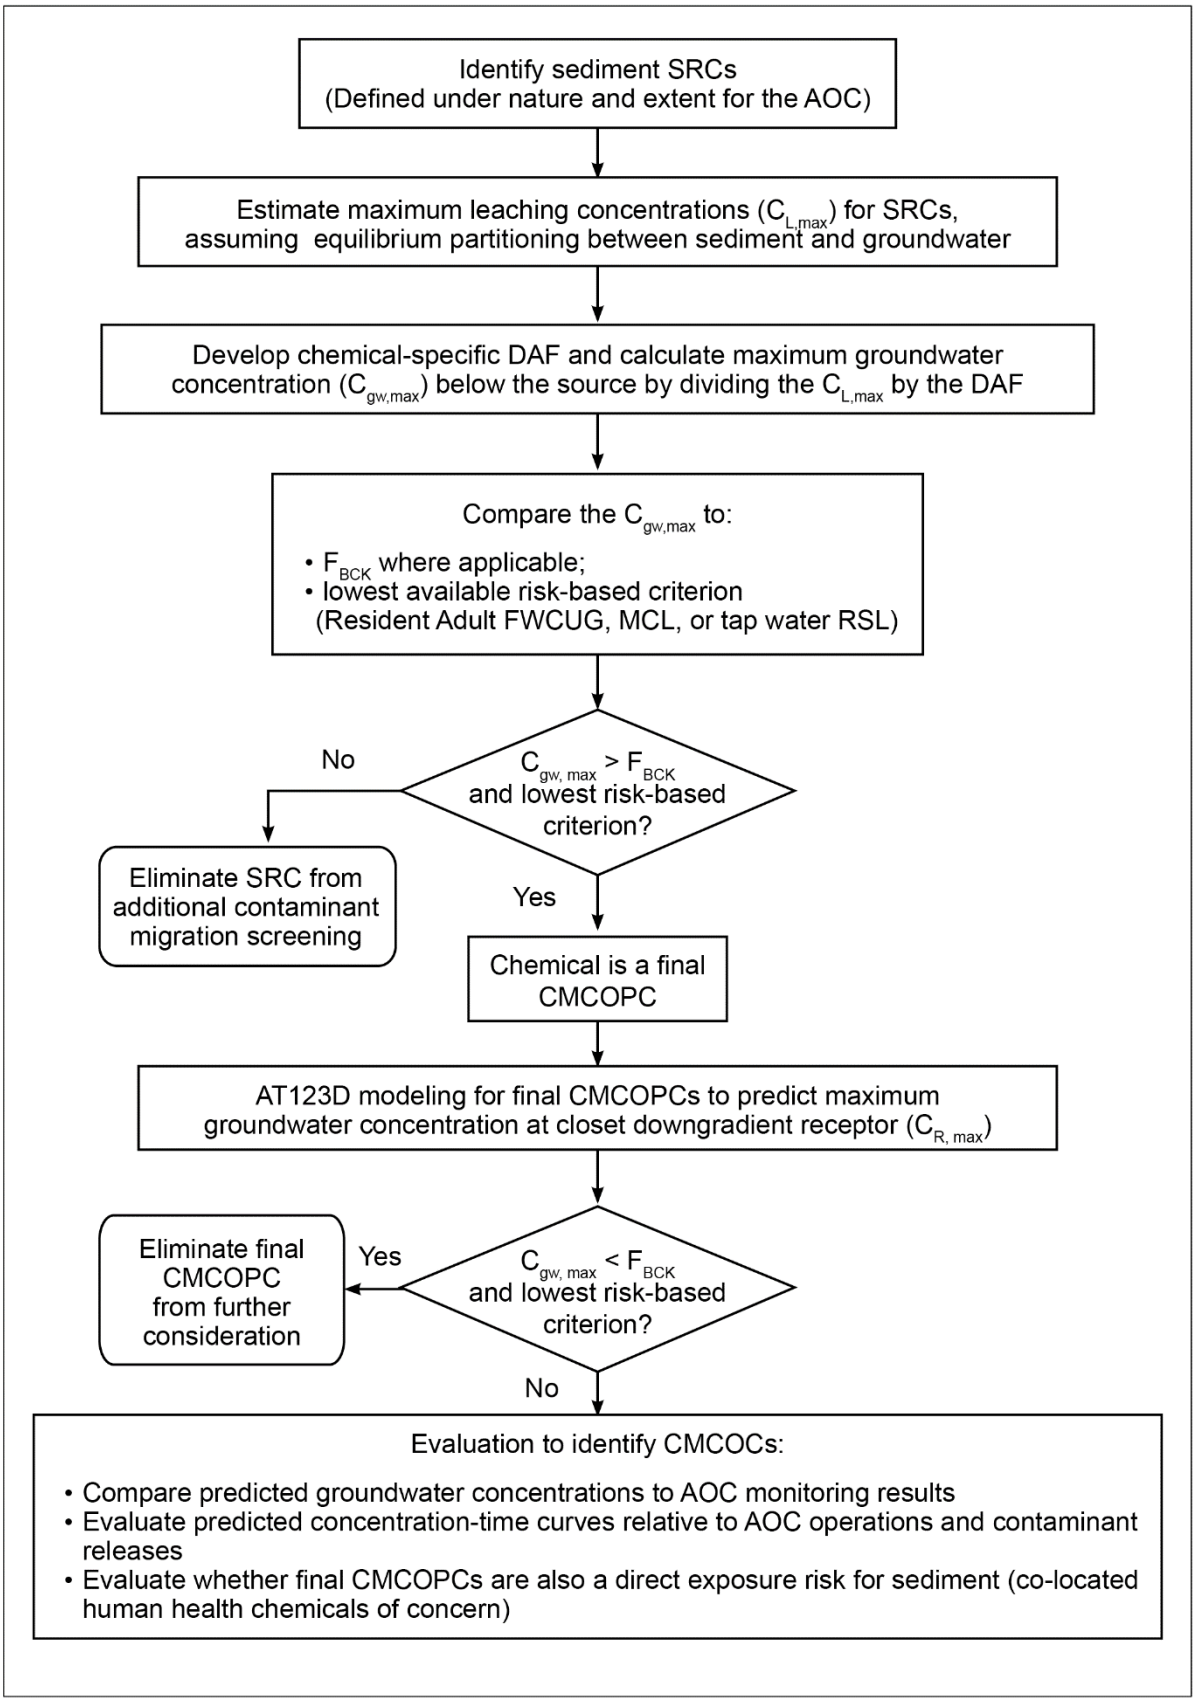


Figure 6–3. AOC Fate and Transport Modeling Approach – Sediment

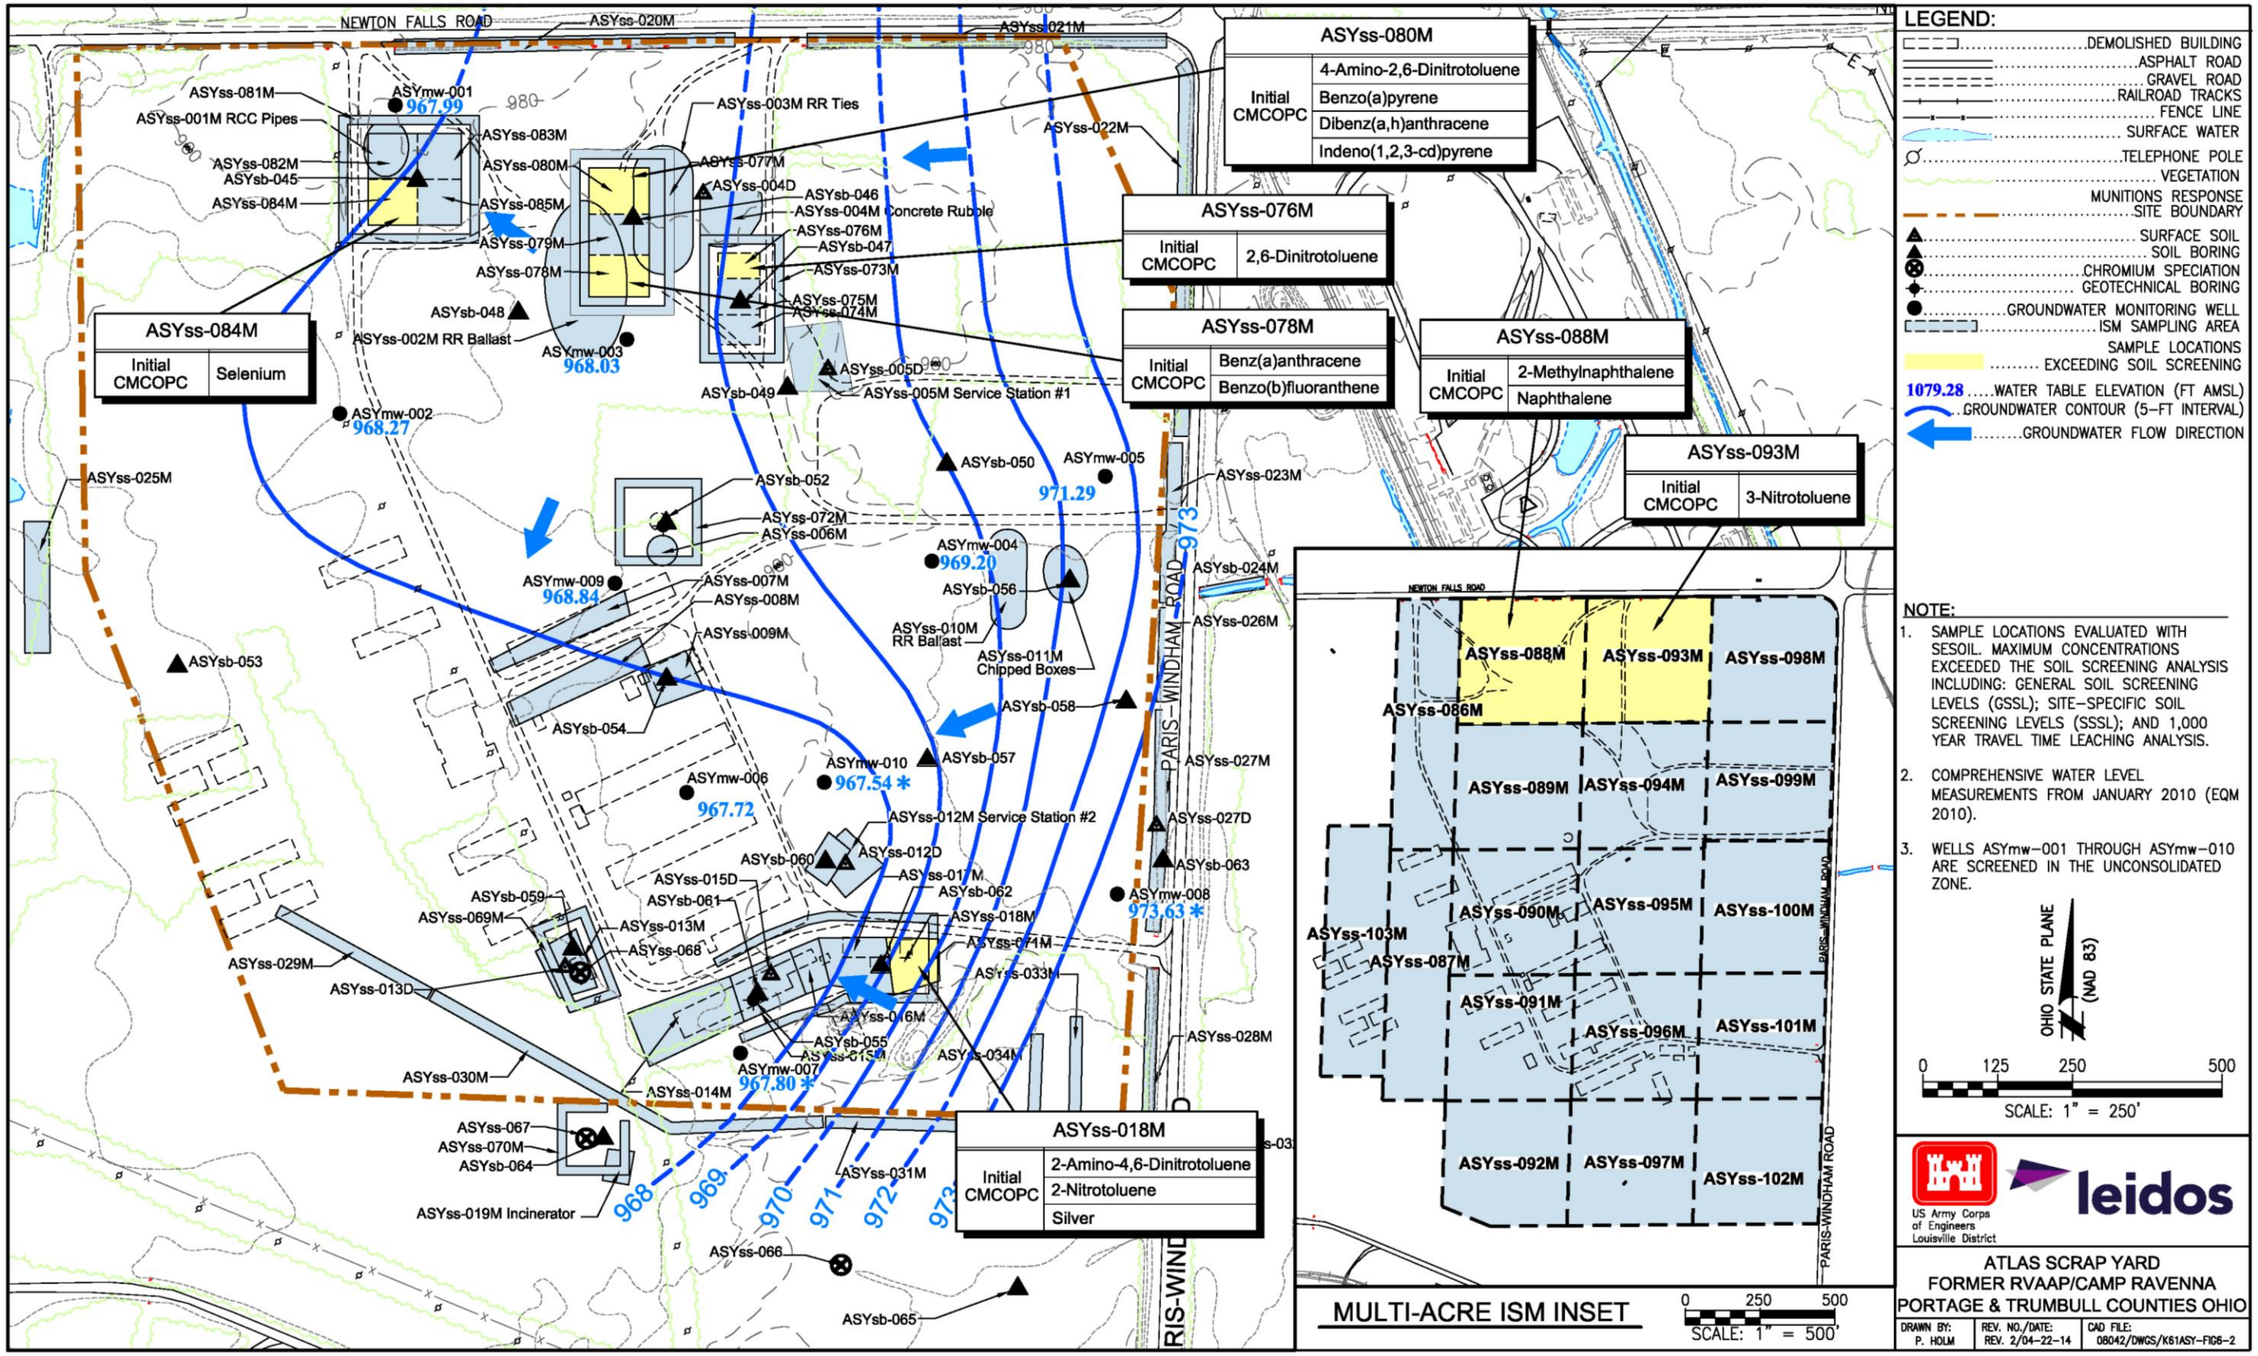


Figure 6–4. Initial CMCOPCs Identified in Soil Screening Analysis for SESOIL Evaluation

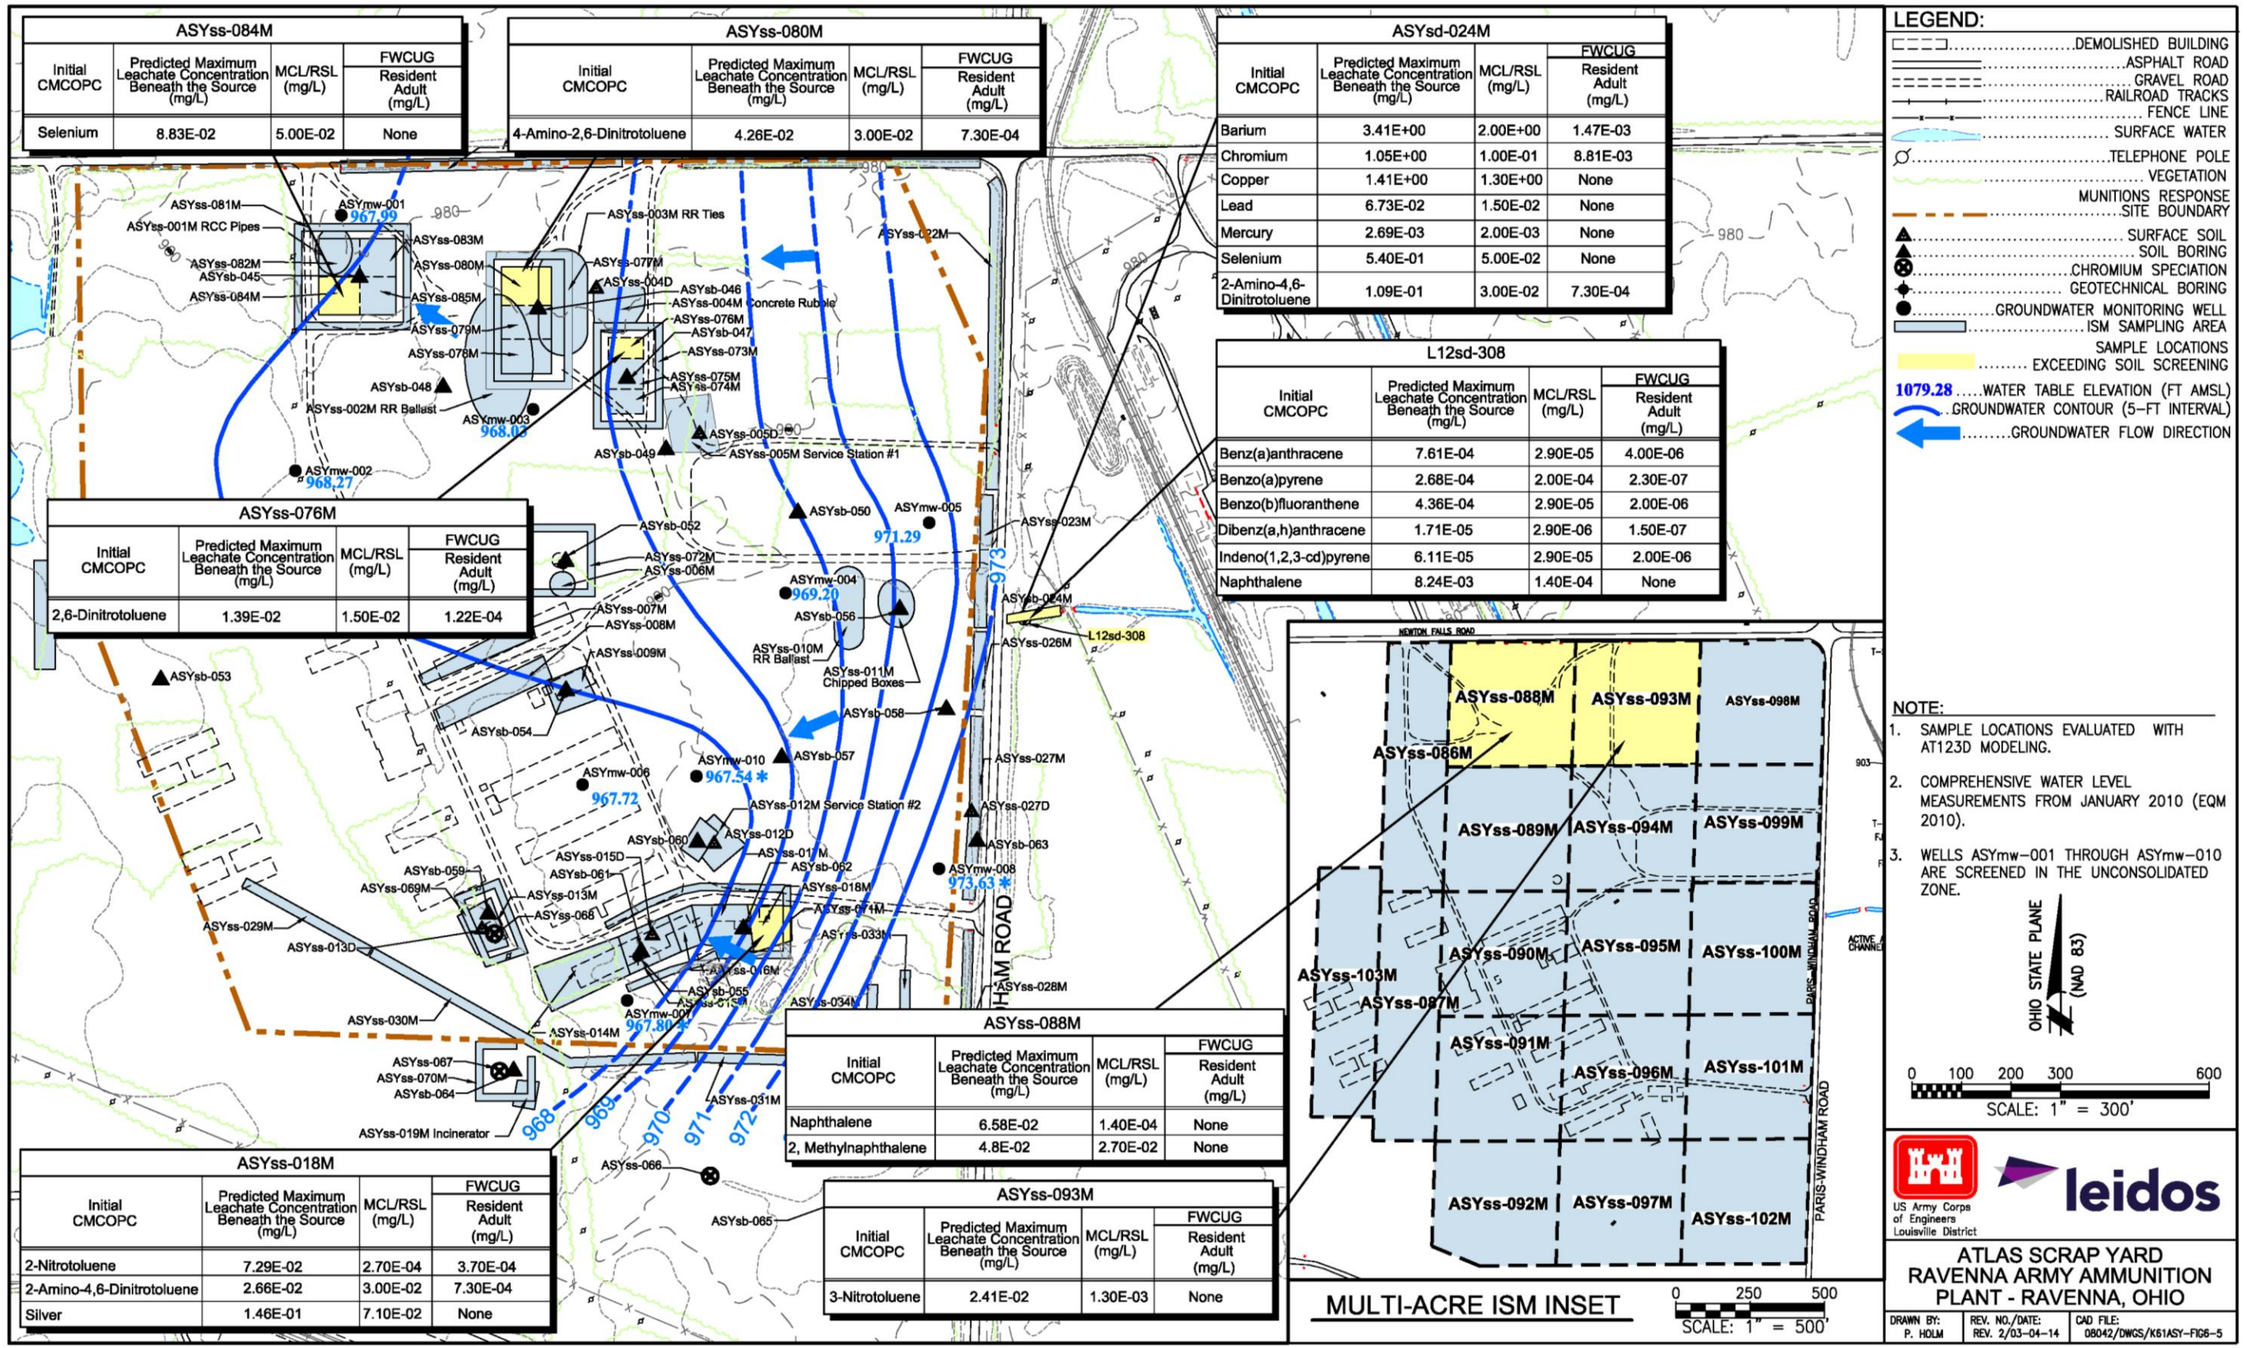


Figure 6–5. CMCOPCs Identified in SESOIL and Sediment Screening Analysis for AT123D Evaluation

7.0 RISK ASSESSMENT

7.1 DATA EVALUATION FOR HUMAN HEALTH AND ECOLOGICAL RISK ASSESSMENTS

The purpose of this data evaluation is to develop a set of chemical data suitable to use in the HHRA and ERA. Atlas Scrap Yard data are evaluated to establish data aggregates and identify a list of SRCs.

7.1.1 Data Aggregates

Section 4.4 provides a summary of available data. Soil data collected at Atlas Scrap Yard were grouped (aggregated) by exposure depth (e.g., surface soil), EU, and sample type (i.e., discrete or ISM). Samples included in the risk assessment datasets are listed in Tables 7-1 and 7-2. No surface water or sediment data were collected at the AOC, as perennial surface water bodies are not present at the AOC. Sediment and surface water samples at ASYsd-024 and L12sd-308 were collected in the ditch east of Atlas Scrap Yard and Paris-Windham Road under the PBA08 RI for Load Line 12. The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains details of these samples. A description of the data aggregates for the media for which human and ecological receptors are potentially exposed is provided in Section 7.1.1, followed by a summary of SRCs in Section 7.1.2.

EUs were established at Atlas Scrap Yard as part of the data aggregation prior to the risk assessment evaluations. An EU is an area where receptors could come into contact with contaminants in soil on a regular basis. The EUs take into account the potential current and future exposures at Atlas Scrap Yard.

Soil at Atlas Scrap Yard was evaluated in the following two EUs, as shown in Figure 2-1.

- ASA EU: the north-central portion of the AOC was historically used for stockpiling a variety of bulk materials and is currently used for storage of salvaged inert materials, including railroad ties, concrete, and brick.
- IA EU: the area outside the ASA.

Soil data were aggregated by the following depth intervals:

- Surface soil with an exposure depth of 0–1 ft bgs was evaluated for the human health receptors and potential risk to ecological receptors, as this layer is the most active biological zone (USACE 2003b). Table 7-1 presents the risk assessment data for surface soil (0–1 ft bgs). For this risk assessment, 81 surface soil (0–1 ft bgs) ISM samples were used to characterize surface soil. The evaluation of VOCs and hexavalent chromium speciation were done using results from discrete soil samples. All other discrete surface soil samples collected in 2010 were not used for risk assessment screening purposes since the entire AOC was sampled using ISM, and ISM and discrete data should not be

combined into a single statistical analysis. For surface soil ISM samples, each sample result was evaluated as an individual decision unit. Discrete data were used to supplement the evaluation of ISM results and are included in the uncertainty assessment.

- Subsurface soil with an exposure depth of 1–13 ft bgs was evaluated for the human health receptors. Discrete soil data from samples collected from 1–4, 4–7, and 7–13 ft bgs intervals were used to evaluate this exposure depth. Table 7-2 presents the risk assessment data for subsurface soil (1–13 ft bgs).

7.1.2 Identification of SRCs

Section 4.4 presents the statistical methods and screening criteria used to identify SRCs. The purpose of identifying SRCs is to determine the presence or absence of contamination that is above naturally occurring levels.

The SRC screen followed the three steps outlined in the FWCUG Report, as summarized below:

- Background screening: MDCs of naturally occurring inorganic chemicals were compared to RVAAP BSVs, which are summarized in the FWCUG Report. Inorganic chemicals detected above BSVs or having no BSVs were retained as SRCs. All detected organic chemicals were retained as SRCs.
- Screening of essential human nutrients: Chemicals considered essential nutrients (e.g., calcium, chloride, iodine, iron, magnesium, potassium, phosphorous, and sodium) are an integral part of the human food supply and are often added to foods as supplements. USEPA recommends these chemicals not be evaluated so long as they are: (1) present at low concentrations (i.e., only slightly elevated above naturally occurring levels) and (2) toxic at very high doses (i.e., much higher than those that could be associated with contact at the AOC) (USEPA 1989). Essential nutrients detected near or below their RDA/RDI-based screening levels were eliminated as SRCs.
- Frequency of detection screening: In accordance with the FWCUG Report and as revised in the *Final (Revised) United States Army Corps of Engineers RVAAP Position Paper for the Application and Use of Facility-Wide Human Health Cleanup Goals* (USACE 2012b) (hereafter referred to as the Position Paper for Human Health FWCUGs), analytes detected in less than 5% of the samples are screened out from further consideration, with the exception of explosives and propellants. At Atlas Scrap Yard, 42 discrete subsurface samples (1–13 ft bgs) were available for frequency of detection screening; however, no SRCs were screened out on this basis. Several PAHs were detected in less than 5% of subsurface soil samples. These PAHs were retained as SRCs because they were identified as SRCs in surface (0–1 ft bgs) soil. The MDC for all of the PAHs identified as SRCs for the 1–13 ft bgs soil interval are from the same sample (ASYsb-048-5673-SO), and most are significantly greater than the detection limit (i.e., 10 times greater than the detection limit). The frequency of detection screening was not applied to ISM samples.

Details of the SRC screening for each exposure medium are provided in Tables G-1 and G-2 of Appendix G. The SRCs identified for Atlas Scrap Yard are summarized in Table 7-3.

7.2 HUMAN HEALTH RISK ASSESSMENT

This HHRA identifies COCs that may pose potential health risks to humans resulting from exposure to contamination at Atlas Scrap Yard. This HHRA was conducted as part of the PBA08 RI and is based on methods from the following guidance documents:

- FWHHRAM (USACE 2005b),
- FWCUG Report (USACE 2010a), and
- Position Paper for Human Health FWCUGs (USACE 2012b), and
- Technical Memorandum (ARNG 2014).

To accomplish the goal of streamlined, risk-based decision making, the FWCUG Report was developed to support risk assessments of the remaining AOCs that will undergo final transfer of the land for use and management by OHARNG. The FWCUG Report contains calculated FWCUGs and guidance for applying the FWCUGs to accelerate the risk assessment process. This approach takes advantage of the many risk assessment inputs and decisions that have previously been accepted by stakeholders through the application of the CERCLA process at the former RVAAP.

Most of the agreed upon risk assessment methodology has been documented in the FWHHRAM (USACE 2005b) and follows standard USEPA-approved risk assessment guidance. This includes the process to identify RVAAP COPCs (presented in Figure 5-1), a TR of 1E-06 and HQ of 0.1 to identify COPCs, and a TR of 1E-05 and HQ of 1 to identify COCs.

Other approaches, such as calculating the sum-of-ratios (SOR), were developed in the FWCUG Report (USACE 2010a) and Position Paper for Human Health FWCUGs (USACE 2012b).

The approach to risk-based decision making is as follows:

4. ***Develop FWCUGs*** – Use the risk assessment process presented in the FWHHRAM to develop FWCUGs for all COPCs identified from the facility-wide dataset. This process has been completed in the FWCUG Report.
5. ***RI Characterization Sampling*** – Perform sampling and analysis to characterize an AOC and establish baseline chemical concentrations. A summary and the results of the RI characterization sampling for Atlas Scrap Yard are presented in Section 4.0 of this report.
6. ***Mapping and Data Analysis to Identify SRCs and COPCs*** – Follow the requirements specified in the FWHHRAM and the Position Paper for Human Health FWCUGs (USACE 2012b), perform data analysis and mapping to identify SRCs and COPCs, establish EUs, and calculate exposure point concentrations (EPCs) for each COPC. The results of the mapping and data analysis for Atlas Scrap Yard to identify SRCs are presented in Section 4.4 of this report and are summarized in Section 7.1.

7. ***Identification of COCs*** – Compare EPCs to FWCUGs to determine COCs.
8. ***Address Identified COCs*** – Develop FS, PP, and ROD to address any COCs requiring remedy.

Identifying COPCs and COCs follows the four steps for a streamlined risk assessment established in the FWCUG Report and shown in Figure 1-3: identify media of concern, identify COPCs, present AOC Land Use and appropriate receptors, and compare to appropriate FWCUGs to identify COCs. These steps are discussed in the following subsections.

7.2.1 Identify Media of Concern

Media of concern at Atlas Scrap Yard are surface soil and subsurface soil. Surface water and sediment samples were not collected within the AOC during the PBA08 RI, as perennial surface water bodies are not present at the AOC. The only samples (ASYsd-024M and L12sd-308) collected from surface water features that coincided with Atlas Scrap Yard were the samples across Paris-Windham Road, adjacent to Load Line 12. Groundwater is present at this AOC and will be evaluated (including a risk assessment) in a separate document, as explained in Section 2.4.2.

7.2.2 Identify COPCs

Section 4.4 presents the statistical methods and screening criteria used to identify SRCs. COPCs are a subset of the SRCs in each exposure medium present at concentrations that indicate the potential for impacts to human receptors. The COPC screen follows the approach specified in the FWCUG Report and is summarized in this section.

To identify COPCs, the MDC of all SRCs was screened against the most stringent chemical-specific FWCUG of all RVAAP receptors at a target cancer risk level of 1E-06 and non-carcinogenic target HQ of 0.1 for the Resident Receptor (Adult and Child) and National Guard Trainee. If no FWCUGs existed for an SRC, the USEPA Residential RSL (from RSL table dated November 2012) was used for this screen. No reference dose (RfD) or cancer potency factors are available for acenaphthylene, benzo(g,h,i)perylene, and phenanthrene; therefore, the RSL for pyrene was used for these PAHs (NDEP 2006).

Hexavalent chromium was detected in two of three discrete surface soil samples collected at Atlas Scrap Yard for chromium speciation. Since hexavalent chromium was detected as part of the conservative screening approach for identifying COPCs, the FWCUG for hexavalent chromium (the more toxic of the two chromium species evaluated) was used at this stage.

Details of the COPC screenings for each exposure medium are provided in Tables G-1 and G-2 of Appendix G. The COPCs identified for the media of concern at Atlas Scrap Yard are presented in Table 7-4 and are summarized below.

7.2.2.1 COPCs in Surface Soil

A total of 60 chemicals were detected in surface soil ISM samples, 53 of these chemicals (16 inorganic chemicals, 9 explosives, 26 SVOCs, 1 PCB, and 1 VOC) were identified as SRCs. Risk-based screening identified seven inorganic chemicals (aluminum, arsenic, cadmium, chromium, cobalt, lead, and manganese) and seven SVOCs [benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] as COPCs in surface soil.

At Atlas Scrap Yard, chromium was identified as an SRC in surface soil ISM samples. The MDC of total chromium in surface soil ISM samples was 64 mg/kg, which is greater than the lowest screening value for hexavalent chromium (1.64 mg/kg) and greater than the total chromium background concentration for surface soil (17.4 mg/kg). Therefore, total chromium was retained as a COPC for surface soil.

7.2.2.2 COPCs in Subsurface Soil

A total of 46 chemicals were detected in discrete subsurface soil samples collected from the 1–13 ft bgs exposure depth. Thirty of these chemicals (7 inorganic chemicals, 3 explosives, 17 SVOCs, and 3 VOCs) were identified as SRCs. Risk-based screening identified two inorganic chemicals (arsenic and cobalt) and five SVOCs [benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] as COPCs for subsurface soil.

7.2.3 Land Use and Representative Receptors

Camp Ravenna is a controlled-access facility. Atlas Scrap Yard is located in the southeastern portion of the facility and is not currently used for training. However, the north-central portion of the AOC is used for storage of railroad ties and salvaged inert materials. Three Land Uses for the RVAAP restoration program are specified in the Technical Memorandum (ARNG 2014) for consideration in the RI along with the following Representative Receptors:

1. Unrestricted (Residential) Land Use – Resident Receptor (Adult and Child)
2. Military Training Land Use – National Guard Trainee
3. Commercial/Industrial Land Use – Industrial Receptor (USEPA's Composite Worker)

Unrestricted (Residential) Land Use is considered protective for all three Land Uses at Camp Ravenna. Therefore, if an AOC meets the requirements for Unrestricted (Residential) Land Use, then the AOC is also considered to have met the requirements of the other Land Uses (i.e., Industrial and Military Training), and those other Land Uses do not require evaluation.

As stated in Paragraph 6.d of the Technical Memorandum, if an AOC fails to meet the Unrestricted (Residential) Land Use, then an FS will be completed that evaluates cleanup options for all three Land Uses [i.e., Unrestricted (Residential) Land Use, Military Training Land Use, and

Commercial/Industrial Land Use]. Remedial alternatives for meeting each Land Use are to be evaluated per the current guidelines for selecting a remedy for the AOC.

7.2.4 Compare to Appropriate FWCUGs

Previous sections have outlined the process for identifying SRCs and COPCs. Comparing COPC exposure concentrations to FWCUGs and determining COCs follows guidance presented in the Position Paper for Human Health FWCUGs (USACE 2012b) and Technical Memorandum (ARNG 2014).

The COC determination process is as follows:

- Report all carcinogenic and non-carcinogenic based screening levels for each COPC for the representative receptors: Unrestricted (Residential) Land Use [Resident Receptor (Adult and Child)], Military Training Land Use (National Guard Trainee), and Commercial/Industrial Land Use [Industrial Receptor (USEPA's Composite Worker)]. Screening levels for the Resident Receptor (Adult and Child) and National Guard Trainee are the FWCUGs corresponding to a TR of 1E-05 and target HQ of 1.0.If no FWCUG is available for a COPC, the residential RSL and industrial RSL, adjusted to represent a TR of 1E-05 or target HQ of 1.0 are used for the Resident Receptor and National Guard Trainee, respectively. Screening levels for the Industrial Receptor are the industrial RSLs adjusted to represent a TR of 1E-05 or target HQ of 1.0.
- Report critical effect and target organ for each non-carcinogenic-based FWCUG.
- Compare the selected FWCUG to the EPC, including an SOR.
    - For non-carcinogens, compare the EPC to the target HQ FWCUG. Sum the ratios of EPC/FWCUG for COPCs that affect similar target organs or do not have an identified target organ.
    - For carcinogens, compare the EPC to the TR FWCUG. Sum the ratios of EPC/FWCUG for all carcinogens.
- Identify the COPC as a COC for a given receptor if:
    - The EPC exceeds the most stringent screening level for either the 1E-05 target cancer risk or the 1.0 target HQ; or
    - The SOR for all carcinogens or all non-carcinogens that may affect the same organ is greater than one. Chemicals contributing at least 10% to the SOR are also considered COCs. In accordance with the Position Paper for Human Health FWCUGs (USACE 2012b), chemicals contributing greater than 5% but less than 10% to the SOR must be further evaluated before being eliminated as COCs.

The process for calculating FWCUGs rearranges cancer risk or non-cancer hazard equations in order to obtain a concentration that will produce a specific risk or hazard level (USEPA 1991, USACE 2010a). For example, the FWCUG for arsenic at the cancer risk level of 1E-05 for the Resident Receptor Adult is the concentration of arsenic that produces a risk of 1E-05 when using exposure parameters specific to the Resident Receptor Adult.

For carcinogens, risk is expressed as the probability that an individual will develop cancer over a lifetime as a result of exposure to the carcinogen. Cancer risk from exposure to contamination is expressed as the increased chance of cancer above the normal background rate. In the United States, the background chance of contracting cancer is a little more than 3 in 10, or 3E-01 (American Cancer Society 2003). The calculated incremental lifetime cancer risks (ILCRs) are compared to the range specified in the NCP of 10^{-6} to 10^{-4}, or 1 in a million to 1 in 10,000 exposed persons developing cancer (USEPA 1990). Cancer risks below 10^{-6} are considered acceptable; cancer risks above 10^{-4} are considered unacceptable. The range between 10^{-6} and 10^{-4} is of concern, and any decisions to address risks further in this range, either through additional study or engineered control measures, should account for uncertainty in risk estimates. The Ohio EPA Division of Environmental Response and Revitalization (DERR) program has adopted a human health cumulative ILCR goal within this range of 1E-05 to be used as the level of acceptable excess cancer risk and for developing remediation goals for the site. The DERR notes that the defined risk goal should be applied as a goal, recognizing the need to retain flexibility when evaluating and selecting remedial alternatives.

In addition to developing cancer from exposure to chemicals, an individual may experience other adverse effects. The term "adverse effects" is used here to describe a wide variety of systemic effects ranging from minor irritations, such as eye irritation and headaches, to more substantial effects, such as kidney or liver disease and neurological damage. The risks associated with toxic (i.e., non-carcinogenic) chemicals are evaluated by comparing an estimated exposure (i.e., intake or dose) from AOC media to an acceptable exposure expressed as an RfD. The RfD is the threshold level below which no adverse effects are expected to occur in a population, including sensitive subpopulations. The ratio of intake over the RfD is the HQ (USEPA 1989).

The SOR is used to account for potential additive effects from exposure to multiple chemicals that can cause the same effect (e.g., cancer) or affect the same target organ. Cancer risk is assumed to be additive for all carcinogens. Non-cancer risk is assumed to be additive for chemicals with similar sites of toxicological action (i.e., target organ such as the liver or critical effect such as adversely affecting the ability to reproduce). This approach compares the EPC of each COPC to the FWCUG to determine a ratio. The sum of these individual ratios is then compared to one. The SOR method is based on the principle that a ratio greater than one represents unacceptable cumulative exposure (i.e., above FWCUGs if adjusted for exposure to multiple COPCs), and a ratio less than or equal to one represents acceptable cumulative exposure (i.e., below FWCUGs if adjusted for exposure to multiple COPCs). The FWCUGs for some chemical/receptor combinations are less than the background concentration. In these instances, the chemical concentrations are compared to background concentrations to identify COCs. Since the background concentration is not risk-based, these chemicals are not included in the SOR calculations.

Selecting FWCUGs, calculating EPCs for comparison to the FWCUGs, and the resulting risk-based COCs are detailed in the following sections.

7.2.4.1 Selection of Appropriate FWCUGs

Unrestricted (Residential) Land Use is evaluated using FWCUGs for the Resident Receptor (Adult and Child). Military Training Land Use is evaluated using FWCUGs for the National Guard Trainee. Commercial/Industrial Land Use is evaluated using RSLs for the Industrial Receptor (USEPA's Composite Worker).

The screening levels provided in Table 7-5 for the Resident Receptor (Adult and Child) and National Guard Trainee are the FWCUGs corresponding to a TR of 1E-05 and target HQ of 1.0. If no FWCUG is available for a COPC, the residential RSL and industrial RSL, adjusted to represent a TR of 1E-05 or target HQ of 1.0 are used for the Resident Receptor and National Guard Trainee, respectively. Screening levels for the Industrial Receptor are the industrial RSLs adjusted to represent a TR of 1E-05 or target HQ of 1.0. The critical effects or target organs associated with the toxicity values used to calculate the non-cancer FWCUGs are also provided.

Chromium Speciation

FWCUGs are available for hexavalent chromium and trivalent chromium. Existing data at other AOCs, such the Building 1200 and Anchor Test Area AOCs (USACE 2012c, USACE 2012d), indicates chromium exists predominantly in the trivalent state, rather than the more toxic hexavalent state. Implementing the chromium speciation process per the PBA08 SAP is discussed below.

- **Collect hexavalent chromium and total chromium samples and results** – To determine whether the FWCUGs for trivalent or hexavalent chromium are most applicable to Atlas Scrap Yard and to support risk management decisions, three discrete surface soil samples were collected and analyzed for hexavalent chromium and total chromium per the PBA08 SAP and as described in Sections 4.2.2.3 and 5.1. Two samples were collected from areas previously identified as having elevated total chromium concentrations, and one was collected from an area identified as having chromium concentrations near background concentrations. Hexavalent chromium was detected in two of the three samples at 0.97 mg/kg and 1 mg/kg (Table 5-1).
- **Evaluate percent hexavalent chromium in chromium speciation samples –** As documented in the PBA08 SAP, "Chromium speciation evaluates the concentration ratio of hexavalent chromium to total chromium. This ratio will be calculated by collecting and analyzing three samples per AOC for both hexavalent chromium and total chromium." Hexavalent chromium was not detected in one of the three chromium speciation samples collected at Atlas Scrap Yard. The other two samples contained 6.5% and 7.2% hexavalent chromium. The FWCUG for hexavalent chromium is based on a cancer unit risk factor (URF) calculated using a chromium mixture containing 14% hexavalent chromium and 86% trivalent chromium. These sample results are below the 14% hexavalent chromium used as the basis for the cancer URF, which was used to calculate the hexavalent chromium FWCUGs.

- **Compare the concentration of hexavalent chromium detected in the chromium speciation samples to the residential RSL for hexavalent chromium** – The FWCUG for hexavalent chromium is more appropriately applied to total chromium because it was calculated from a cancer URF based on a chromium mixture containing one-seventh (14%) hexavalent chromium (USEPA 2010). The residential RSL (3 mg/kg based on a TR of 1E-05) for hexavalent chromium is specific to hexavalent chromium (i.e., it has been adjusted for the chromium mixture used in the toxicity study). The detected concentrations of hexavalent chromium in the chromium speciation samples (0.97 and 1 mg/kg) are less than 3 mg/kg, indicating hexavalent chromium is not present above the residential RSL for hexavalent chromium.
- **Compare the concentration of total chromium to the FWCUG for trivalent chromium** – After implementing the chromium speciation process specified in the PBA08 SAP, hexavalent chromium was determined to be present at a very low concentration (i.e., below the residential RSL for hexavalent chromium), and the percent hexavalent chromium is less than 14%. Therefore, hexavalent chromium is not of concern at Atlas Scrap Yard, and the reported concentrations of total chromium were compared to the FWCUGs for trivalent chromium for identifying COCs at this AOC.

7.2.4.2 Exposure Point Concentrations for Comparison to FWCUGs

Surface Soil

Surface soil (0–1 ft bgs) at Atlas Scrap Yard was characterized using ISM and discrete sampling. The ISM analytical results can provide a more reliable estimate of the average concentration for a decision unit but cannot be combined with analytical results from discrete samples (USACE 2009). As noted in the *Technical and Regulatory Guidance for Incremental Sampling Methodology* (ITRC 2012), different objectives require different spatial scales for ISM sample areas.

Some objectives call for characterizing contaminant concentrations over a relatively large area (e.g., multiple acres) if the primary objective is assessing risk in order to represent an exposure concentration within a human health exposure area. Other objectives focus on distinguishing concentration differences on a much smaller scale (e.g., within a few feet) to delineate potential remediation areas. In accordance with the PBA08 SAP, two types of ISM sampling were used to characterize surface soil at Atlas Scrap Yard.

1. Potential source area ISM samples were collected from areas biased toward locations anticipated to have the highest level of potential contamination (i.e., around former buildings, around railroad tie storage piles, and along roads) to delineate potential sources. These ISM samples generally ranged from 0.01–0.6 acres and averaged 0.3 acres but also included three larger, 3-acre samples.
2. Larger ISM grid samples were collected to characterize the potential exposure area within the AOC, but these samples do not provide the spatial resolution needed to identify

potential source areas. Characterization of the AOC was achieved using ISM samples with a nominal 3-4 acre grid size.

EPCs are intended to provide representative concentrations that a receptor might contact during the period of exposure. Although Atlas Scrap Yard was assessed as two EUs (ASA and IA), exposure to surface soil was based on ISM samples. The ISM was used to determine an average concentration representative of the soil contained within a defined area (i.e., the "decision unit"). Therefore, individual ISM results were compared directly to the surface soil FWCUGs for the Atlas Scrap Yard receptors.

Subsurface Soil

EPCs were calculated for the 1–13 ft bgs subsurface soil exposure depth using analytical results from the discrete samples presented in Table 7-2. The EPC is either the 95% upper confidence limit (UCL) of the mean or the MDC, whichever value is lowest. If the 95% UCL could not be determined, the EPC is the MDC. Because the subsurface soil samples were collected from a variety of depth intervals within the 1–13 ft interval (i.e., 1–4 ft bgs, 4–7 ft bgs, 7–13 ft bgs, and 8–9.5 ft bgs) the 95% UCL was calculated for a depth weighted mean and standard error using the Chebyshev approach (ITRC 2012) shown below:

Chebyshev 95% UCL = weighted mean + sqrt(1/0.05-1) x weighted standard error

The weight for each sample was the sample interval thickness in feet. The samples taken from 1–4 and 4–7 ft bgs were given a weight of 3 and the 7–13 ft bgs samples were given a weight of 6 and the 8–9.5 ft samples were given a weight of 1.5. In addition to evaluation of the EPC, chemical concentrations in individual samples were evaluated to identify the location and depth of any exceedances of screening levels.

7.2.4.3 Identification of COCs for Unrestricted (Residential) Land Use

Atlas Scrap Yard COCs for Unrestricted (Residential) Land Use, as represented by the Resident Receptor (Adult and Child), are presented below.

COCs in Surface Soil (0–1 ft bgs)

COC screening for surface soil for the Resident Receptor (Adult and Child) is detailed in Tables G-3 through G-8 of Appendix G. Lead and several PAHs were identified as COCs for the Resident Receptor (Adult and Child), as explained below.

COPCs with EPCs Lower than the Resident Receptor (Adult and Child) FWCUG – All reported concentrations of aluminum, cadmium, chromium, cobalt, and chrysene at the ASA and IA are lower than the Resident Receptor (Adult and Child) FWCUG.

COPCs with EPCs Exceeding the Resident Receptor (Adult and Child) FWCUG – Reported concentrations of arsenic, lead, manganese, and several PAHs exceed the FWCUG at one or more sample location.

The reported arsenic concentrations at ASYss-017M (22 mg/kg) and ASYss-018M (41 mg/kg) exceed the FWCUG of 4.25 mg/kg and the surface soil BSV of 15.4 mg/kg. The reported concentrations in all other 23 samples are less than the surface soil BSV. Arsenic is not identified as a COC in surface soil based on the following WOE:

- Evaluation of the arsenic soil data indicates soil concentrations are not indicative of AOC contamination.
- Samples ASYss-017M and ASYss-018M were collected in 2004 to evaluate the former locations of Building T-14 (Garage) and T-16 (Blacksmith Shop). After 1944, these buildings were used for roads and ground equipment storage and were demolished sometime after 1971. Because building demolition and other earthmoving activities have disturbed the soil, it is appropriate to compare surface soil sample results to the surface and subsurface BSVs. The detected arsenic concentration at ASYss-017M (22 mg/kg) is essentially equivalent to the subsurface BSV for arsenic of 19.8 mg/kg.
- Arsenic is a common element in Ohio soil, and values exceeding 20 mg/kg are not uncommon (ODNR 2010). For example, an environmental study of three locations in Cuyahoga County performed for Ohio EPA (Weston 2012) showed arsenic ranged from 4.6–25.2 mg/kg (22.9 mg/kg excluding statistical outliers) in surface soil (0–2 ft bgs) and 5.3–34.8 mg/kg (22.6 mg/kg excluding statistical outliers) in subsurface soil (2–4 ft bgs). Also, Vosnakis and Perry (2009) published the results of arsenic concentration studies that included 313 samples of Ohio soil. Naturally occurring arsenic in these samples ranged from 1.6–71.3 mg/kg. In other studies, native soil concentrations of arsenic in Ohio have been reported as ranging from 0.5–56 mg/kg (Ohio EPA 1996), and the U.S. Geological Survey's Certificate of Analysis of the Devonian Ohio Shale estimates arsenic concentrations of 68.5 mg/kg are naturally present in bedrock shale (USGS 2004). Based on this information, arsenic appears to be present at Atlas Scrap Yard at naturally occurring concentrations.
- Each ISM sample was evaluated as a separate EU. The sampled area at ASYss-018M was 0.1 acres (65 x 65 ft) and was intended to characterize the footprint of former Building T-16. This area is too small to represent an EU for the Resident Receptor. Sample ASYss-071M was collected around Sample ASYss-018M in 2010 to delineate the lateral extent of arsenic in this area. The measured arsenic concentration in the surrounding sample (ASYss-071M) is 8 mg/kg. ISM sample ASYss-017M and discrete sample ASYsb-062 were collected adjacent to sample ASYss-018M and have reported arsenic concentrations of 22 mg/kg and 10.8 mg/kg. The very limited extent of arsenic, within natural levels reported for Ohio, at ASYss-018M does not warrant further evaluation at this location.

The reported lead concentration at ASYss-019M (1,200 mg/kg) exceeds the residential RSL of 400 mg/kg, surface soil BSV of 26.1 mg/kg, and subsurface soil BSV of 19.1 mg/kg. The reported

concentrations in all other ISM samples are less than the RSL. Lead is identified as a COC in surface soil because evaluation of the lead soil data indicates soil concentrations are indicative of AOC contamination, as noted below:

- Sample ASYss-019M was collected in 2004 near the former construction camp incinerator. The brick structure associated with the incinerator is still present. Operations at the incinerator could have contributed lead to the surrounding soil.
- A discrete sample (ASYsb-064) collected in the same area showed a lead concentration of 3,570 mg/kg, which is well above the RSL.ISM sample ASYss-070M was collected around sample ASYss-019M in 2010 to delineate the lateral extent of lead in this area. The measured lead concentration in ASYss-070M is 312 mg/kg which is less than the RSL but well above the BSV.
- As described previously, each ISM sample was evaluated as a separate EU. The sampled area at ASYss-019M was 0.08 acres. This area is too small to represent an EU for the Resident Receptor; however, the measured concentrations in nearby samples (ASYss-070 and ASYsb-064) are also elevated above the RSL and/or background. The elevated levels of lead at a potential source area warrant further evaluation at this location.

The reported manganese concentrations at ASYss-078M (3,330 mg/kg), ASYss-078 (3,180 mg/kg), ASYss-123M (3,040 mg/kg), and ASYss-084M (3,600 mg/kg) exceed the FWCUG of 2,927 mg/kg and the surface soil BSV of 1,450 mg/kg. The reported concentrations in all other samples are less than the FWCUG. Manganese is not identified as a COC in surface soil because the manganese soil concentrations are not indicative of AOC contamination based on the following WOE:

- Building demolition and other earthmoving activities have disturbed the soil at Atlas Scrap Yard; therefore, it is appropriate to compare surface soil sample results to the surface and subsurface BSVs. Reported manganese concentrations slightly exceed the subsurface soil BSV of 3,030 mg/kg in less than 5% (4 of 81) ISM samples. The detected manganese concentration at these four locations range from 3,040 to 3,600 mg/kg.
- Samples ASYss-078M and ASYss-079M were collected in 2010 as part of the evaluation of the north-central portion of Atlas Scrap Yard (i.e., ASA). This area was utilized as a slag/gravel parking lot and storage area for railroad ballast. Sample ASYss-084 was collected in 2010 at the former staging area for RCC pipes. Sample ASYss-123M was collected in 2011 from a drainage ditch within the ASA. The only potential source of manganese in these areas is the slag used as fill and for gravel parking areas and stored railroad ballast. Steelmaking slag is a complex matrix structure consisting primarily of oxides of calcium, iron, silicon, aluminum, magnesium, and manganese in complexes of calcium silicates, aluminosilicates, and alumino ferrite. The matrix tightly binds the metals, and they are not easily leached into the environment. However, slag particles may be included as part of the sampled matrix in areas where slag is present. Slag used at RVAAP was sampled as part of the Load Line 2 Phase II RI (USACE 2004). Manganese concentrations in these slag samples ranged from 1,310–7,500 mg/kg.

- Based on this information, manganese appears to be present at Atlas Scrap Yard near naturally occurring concentrations, and the highest reported concentrations are in areas potentially impacted by particulates originating from slag.

Reported concentrations of one or more of the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene exceed Resident Receptor FWCUGs in all but one ISM source area samples collected at the ASA. As an example of these PAHs, concentrations of benzo(a)pyrene range from 0.12–50 mg/kg compared to the FWCUG for the Resident Receptor of 0.221 mg/kg. Ohio EPA has published soil cleanup goals for PAHs for the Ohio Voluntary Action Program (VAP) and BUSTR. A total of 17 of 24 source area ISM samples analyzed for PAHs at the ASA have benzo(a)pyrene concentrations greater than the Ohio VAP/BUSTR standard of 1.1 mg/kg. The ASA has been utilized as a stockpile storage area for bulk material, including gravel, railroad ballasts, sand, culvert pipe, railroad ties, and telephone poles. This north central portion of Atlas Scrap Yard is still actively utilized for ongoing materials storage, including concrete footers. The highest concentrations of PAHs are reported for samples collected from a slag/gravel/crushed asphalt parking area adjacent to the railroad tie storage pile and the drainage ditch paralleling the north/south road and collecting runoff from the road and parking and storage areas. Therefore, these PAHs are identified as COCs for Unrestricted (Residential) Land Use at the ASA. Reported concentrations of PAHs in three of the four large grid samples that make up the ASA also exceed residential FWCUGs; however, the source area ISM samples provide complete sample coverage of these grids and better describe the pattern of contamination. Therefore, the discussion focuses on the results of the source area samples.

Reported concentrations of one or more of the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene exceed Resident Receptor FWCUGs in 9 of 12 ISM source area samples collected at the IA. As an example of these PAHs, concentrations of benzo(a)pyrene range from 0.015–4.4 mg/kg. These concentrations are much lower than those identified at the ASA. The concentration of benzo(a)pyrene in two ISM source area samples at the IA exceeds the Ohio VAP/BUSTR standard of 1.1 mg/kg: ASYss-069M (1.7 mg/kg) and ASYss-071M (4.4 mg/kg). Both of these samples include portions of gravel roads. The concentration of benzo(a)pyrene (1.4 mg/kg) in ISM grid sample ASYss-104 also barely exceeds the Ohio VAP/BUSTR standard of 1.1 mg/kg. This sample was collected at the main entrance/exit point from the AOC and is most likely associated with traffic (especially diesel truck traffic) in this area. The reported concentrations of all other PAHs are less than their respective Ohio VAP/BUSTR standards in all samples. While no specific source of PAHs has been identified in the IA, the concentrations of PAHs across the IA are likely associated with the gravel/asphalt roads and attendant vehicle traffic. Therefore, PAHs are not identified as COCs for Unrestricted (Residential) Land Use at the IA.

SOR Analysis. No additional COCs or sample locations were identified for the Resident Receptor (Adult and Child) exposed to surface soil at the ASA or IA based on the SOR analysis. The SOR analysis is summarized below:

- No FWCUG is available for lead and the residential RSL is based on an acceptable blood-lead level, not a specific target organ. Therefore, lead was not included in the SOR analysis.
- Six COPCs (aluminum, arsenic, cadmium, chromium, cobalt, and manganese) identified in surface soil have FWCUGs for non-cancer endpoints. An SOR was calculated for each ISM sample (Tables G-5 and G-6). Aluminum, chromium, cobalt, and manganese were detected below the BSV at many ISM sample locations. These inorganic chemicals were not included in the SOR for samples where the detected concentration is less than the BSV (i.e., the inorganic chemical is not an SRC in the sample). The FWCUG for arsenic was less than background concentrations; therefore, arsenic was not included in the SOR. All calculated SORs are $\leq$1 with the exception of two samples at the ASA (ASYss-078M and ASYss-079M) and one sample at the IA (ASYss-084M). These SORs are associated primarily with manganese. The manganese concentrations in these samples exceed the FWCUG but are near the subsurface soil BSV and are likely associated with slag as discussed previously. Therefore no additional COCs were identified using this analysis.
- Ten COPCs [arsenic, cadmium, cobalt, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in surface soil have FWCUGs for the cancer endpoint. An SOR was calculated for each ISM sample (Tables G-7 and G-8). Cobalt was detected below the BSV at many ISM sample locations. This inorganic chemical was not included in the SOR for samples where the detected concentration is less than the BSV (i.e., it is not an SRC in the sample). The FWCUG for arsenic was less than the BSV; therefore, arsenic was not included in the SOR. The SORs for carcinogenic COPCs are greater than one in most samples at the ASA (Table G-7), largely due to the contribution from benzo(a)pyrene. COPCs contributing at least 5% to these SORs and identified as COCs are the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene. All of these PAHs were previously identified as COCs based on single chemical comparison to FWCUGs. All of the samples having SORs > 1 have at least one PAH at a concentration greater than the FWCUG. Therefore, no additional COCs or samples were identified at the ASA in this analysis. The SORs for carcinogenic COPCs are also greater than one in most samples at the IA (Table G-8), largely due to the contribution from benzo(a)pyrene. COPCs contributing at least 5% to these SORs are the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene. With the exception of benzo(a)pyrene in two ISM source area samples that include portions of gravel roads, the reported concentrations of all PAHs are less than their respective Ohio VAP/BUSTR standards in all samples. As noted previously, no specific source of PAHs has been identified in the IA and the concentrations of PAHs are likely associated with the gravel/asphalt roads and attendant vehicle traffic. Therefore, PAHs are not identified as COCs for Unrestricted (Residential) Land Use at the IA.

A summary of the COCs and sample locations having COCs is provided in Table 7-6.

COCs in Subsurface Soil (1–13 ft bgs)

The COC determination for the subsurface soil exposure depth (1–13 ft bgs) for the Resident Receptor (Adult and Child) is detailed in Tables G-9 through G-11 of Appendix G. No COCs were identified in subsurface soil samples for the Resident (Adult and Child) Receptor, as explained below.

COPCs with EPCs Lower than the Resident Receptor (Adult and Child) FWCUG – The EPCs and all individual sample results for cobalt, benz(a)anthracene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene are all lower than the FWCUGs for the Resident Receptor (Adult and Child) at the ASA and IA.

COPCs Exceeding the Resident Receptor (Adult and Child) FWCUG – The EPCs for arsenic at the ASA (18.4 mg/kg) and IA (17.6 mg/kg) exceed the FWCUG of 4.25 mg/kg but are less than the subsurface soil BSV of 19.8 mg/kg. The MDC of arsenic at the ASA [20.2 mg/kg at ASYsb-046 (at 1–4 ft bgs)] and the IA [25.2 mg/kg at ASYsb-059 (at 1–4 ft bgs)] exceed but are similar to the BSV of 19.8. As noted previously, these concentrations are within the range reported for natural Ohio soils; therefore, arsenic was not identified as a COC in subsurface soil.

The EPCs for benzo(a)pyrene at the ASA (0.035 mg/kg) and IA (0.078 mg/kg) are less than the Resident Receptor FWCUG of 0.221 mg/kg. The MDC of benzo(a)pyrene at the ASA [0.048 mg/kg at ASYsb-048 (at 1–4 ft bgs)] is also less than the Resident Receptor FWCUG. The MDC of benzo(a)pyrene at the IA [0.43 mg/kg at ASYsb-063 (at 1–4 ft bgs)] exceeds the FWCUG but is less than the Ohio VAP/BUSTR standard of 1.1 mg/kg. The concentration reported immediately below (4–7 ft bgs 0.011 mg/kg) this sample has a much lower concentration. Because benzo(a)pyrene was only detected in one sample at the IA above the Resident Receptor FWCUG but below the VAP/BUSTR standard, this PAH was not identified as a COC in subsurface soil.

SOR Analysis – No COCs were identified for the Resident Receptor (Adult and Child) exposed to subsurface soil based on the SOR analysis. The SOR analysis is summarized below:

- Arsenic and cobalt are the only non-cancer COPCs identified in subsurface soil and the FWCUG for arsenic is less than background concentrations; therefore, arsenic was not included in the SOR; therefore, a non-cancer SOR calculation was not needed.
- Six COPCs [arsenic, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in subsurface soil have FWCUGs for the cancer endpoint so SORs were calculated (Table G-11). SORs were calculated using the EPCs as well as MDCs. The SORs are less than one at the ASA. The SOR for the MDC of the PAHs at the IA exceeds one; however, the SOR for the EPC is less than one. As noted previously, benzo(a)pyrene was detected in one sample at the IA above the Resident Receptor FWCUG but below the VAP/BUSTR standard and the concentration reported immediately below this sample as well as the EPC are less than the FWCUG. PAHs were not identified as COCs in subsurface soil.

The COCs and ISM sample locations containing COCs are summarized in Table 7-6 for the Resident Receptor (Adult and Child). A summary of all sample data for arsenic, lead, manganese, and benzo(a)pyrene (as an example of the PAHs) compared to FWCUGs is provided in Tables 7-7 (arsenic and lead), 7-8 (manganese), and 7-9 [benzo(a)pyrene]. These tables include all sample results (source area ISM, grid ISM, and discrete, surface soil, and subsurface soil). Tables 7-8 and 7-9 also include a description of the sample area where chemical concentrations exceed FWCUGs. These results are shown graphically in Figures 7-1 (arsenic and lead), 7-2 (manganese), and 7-3 [benzo(a)pyrene].

7.2.4.4 Identification of COCs for Commercial/Industrial Land Use

Atlas Scrap Yard COCs for Commercial/Industrial Land Use, as represented by the Industrial Receptor, are presented below.

COCs in Surface Soil (0–1 ft bgs)

COC determination for surface soil for the Industrial Receptor is detailed in Tables G-12 through G-17 of Appendix G. Lead and several PAHs were identified as COCs for the Industrial Receptor, as explained below.

COPCs with EPCs Lower than the Industrial RSL – All reported concentrations of aluminum, cadmium, chromium, cobalt, manganese, benzo(k)fluoranthene, chrysene, and indeno(1,2,3-cd)pyrene at the ASA and IA are lower than the industrial RSL.

COPCs with EPCs Exceeding the Industrial RSL – The reported arsenic concentration at ASYss-018M (41 mg/kg) exceeds the FWCUG of 30 mg/kg. Arsenic is not identified as a COC in surface soil based on the WOE presented in previously in Section 7.2.4.3.

The reported lead concentration at ASYss-019M (1,200 mg/kg) exceeds the industrial RSL of 800 mg/kg and the surface and subsurface soil BSVs of 26.1 and 19.1 mg/kg. The reported concentrations in all other ISM samples are less than the RSL. Lead is identified as a COC in surface soil because evaluation of the lead soil data indicates soil concentrations are indicative of AOC contamination as described previously (Section 7.2.4.3).

Reported concentrations of one or more of the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene exceed industrial RSLs in 15 of 24 source area ISM samples at the ASA. As an example of these PAHs, concentrations of benzo(a)pyrene range from 0.12–50 mg/kg compared to the industrial RSL of 2.9 mg/kg. The ASA has been utilized as a stockpile storage area for bulk material, including gravel, railroad ballasts, sand, culvert pipe, railroad ties, and telephone poles. This north central portion of Atlas Scrap Yard is still actively utilized for ongoing materials storage, including concrete footers. Therefore, these PAHs are identified as COCs for Commercial/Industrial Land Use at the ASA. Reported concentrations of PAHs in three of the four large grid samples that make up the ASA also exceed industrial RSLs; however, the source area

ISM samples provide complete sample coverage of these grids and better describe the pattern of contamination. Therefore the discussion focuses on the results of the source area samples.

The reported concentration of benzo(a)pyrene (4.4 mg/kg at ASYss-071M) exceeds the industrial RSL of 2.9 mg/kg in 1 of 12 ISM source area samples collected at the IA. A portion of this sample includes a section of gravel road. While no specific source of PAHs has been identified in the IA, the concentrations of PAHs across the IA are likely associated with the gravel/asphalt roads and attendant vehicle traffic. Therefore, PAHs are not identified as COCs for Commercial/Industrial Land Use at the IA.

SOR Analysis – No additional COCs were identified for the Industrial Receptor exposed to surface soil at the ASA or IA based on the SOR analysis. One additional sample location was identified as having COCs for the Industrial Receptor based on the SOR analysis. The SOR analysis is summarized below:

- No FWCUG is available for lead and the industrial RSL is based on an acceptable blood-lead level, not a specific target organ. Therefore, lead was not included in the SOR analysis.
- Six COPCs (aluminum, arsenic, cadmium, chromium, cobalt, and manganese) identified in surface soil have FWCUGs for non-cancer endpoints. An SOR was calculated for each ISM sample (Tables G-14 and G-15). Aluminum, arsenic, chromium, cobalt, and manganese were detected below the BSV at many ISM sample locations. These inorganic chemicals were not included in the SOR for samples where the detected concentration is less than the BSV (i.e., the inorganic chemical is not an SRC in the sample). All calculated SORs are less than one. Therefore no additional COCs were identified using this analysis.
- Ten COPCs [arsenic, cadmium, cobalt, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in surface soil have FWCUGs for the cancer endpoint. An SOR was calculated for each ISM sample (Tables G-16 and G-17). Arsenic and cobalt were detected below the BSV at many ISM sample locations. These inorganic chemicals were not included in the SOR for samples where the detected concentration is less than the BSV (i.e., the inorganic chemical is not an SRC in the sample). The SORs for carcinogenic COPCs are greater than one in many samples at the ASA (Table G-16), largely due to the contribution from benzo(a)pyrene. COPCs contributing at least 5% to these SORs and identified as COCs are the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene. All of these PAHs were previously identified as COCs at the ASA based on single chemical comparison to RSLs. One sample (ASYss-079M) having an SOR>1 does not have any individual chemicals at a concentration greater than the RSL (i.e., this sample was not identified as having COCs present based on single chemical comparison to RSLs). This sample was added to the list of sample locations having COCs at ASA (Table 7-10) based on this SOR analysis. At the IA, the only sample with an SOR>1 is ASYss-071M (SOR=2).In addition to

benzo(a)pyrene, which exceeds the RSL, benzo(a)anthracene, benzo(b)fluoranthene, and dibenz(a,h)anthracene each contribute at least 5% to the RSL. As described previously, sample ASYss-071M includes a portion of gravel road and PAH concentrations (including SOR) are less than RSLs in all other samples at the IA. Therefore, PAHs are not identified as COCs for Commercial/Industrial Land Use at the IA.

COCs in Subsurface Soil (1–13 ft bgs)

The RSL user's guide does not define an exposure depth for the Industrial Receptor. The Ohio EPA VAP (Ohio Administrative Code 3745-300) and USEPA Soil Screening Guidance (USEPA 1996b define the Industrial Receptor as have maximum exposure depth of 2 ft bgs. All of the subsurface soil data (i.e., to a depth of 13 ft bgs) were included in the evaluation of subsurface soil at the Atlas Scrap Yard.

The COC determination for subsurface soil for the Industrial Receptor is detailed in Tables G-18 through G-20 of Appendix G. No COCs were identified in subsurface soil samples for the Industrial Receptor, as explained below.

COPCs with EPCs Lower than the Industrial RSL – The EPCs and all individual sample results for all COPCs [i.e., arsenic, cobalt, benz(a)anthracene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] are all lower than the industrial RSLs at the ASA and the IA.

SOR Analysis – No COCs were identified for the Industrial Receptor exposed to subsurface soil based on the SOR analysis. The SOR analysis is summarized below:

- Arsenic and cobalt are the only non-cancer COPCs identified in subsurface soil. The target organs for these chemicals are skin and thyroid respectively; therefore, a non-cancer SOR was not calculated.
- Six COPCs [arsenic, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in subsurface soil have RSLs for the cancer endpoint so SORs were calculated (Table G-20). SORs were calculated using the EPCs as well as MDCs. The SORs are less than or equal to one at the ASA and IA.

No COCs were identified in subsurface soil for the Industrial Receptor.

The COCs and ISM sample locations having COCs are summarized in Table 7-10 for the Industrial Receptor.

7.2.4.5 Identification of COCs for Military Training Land Use

Atlas Scrap Yard COCs for Military Training Land Use, as represented by the National Guard Trainee, are presented below.

COCs in Surface Soil (0–1 ft bgs)

The FWCUG Report (USACE 2010a), defines the exposure depths for the National Guard Trainee as deep surface soil (0–4 ft bgs) and subsurface soil (4–7 ft bgs). At Atlas Scrap Yard, the 0–1 ft bgs portion of the deep surface soil interval was characterized using ISM sampling and the deeper portion (1–4 ft bgs) was characterized using discrete samples from soil borings. Due to different levels of variability in these two data types, these two intervals were evaluated separately. The evaluation of the 0–1 ft bgs ISM surface soil samples is detailed in Tables G-21 through G-29 of Appendix G and summarized here. The deeper portion of this interval is presented with the subsurface evaluation.

Lead and several PAHs were identified as COCs in 0–1 ft bgs ISM surface soil samples for the National Guard Trainee, as explained below.

COPCs with EPCs Lower than the National Guard Trainee FWCUG – All reported concentrations of aluminum, cadmium, chromium, cobalt, benzo(k)fluoranthene, chrysene, and indeno(1,2,3-cd)pyrene at the ASA and IA are lower than the National Guard Trainee FWCUG.

COPCs with EPCs Exceeding the National Guard Trainee FWCUG – The reported arsenic concentration at ASYss-018M (41 mg/kg) exceeds the FWCUG of 27.8 mg/kg. Arsenic is not identified as a COC in surface soil based on the WOE presented previously in Section 7.2.4.3.

No FWCUG is available for lead for the National Guard Trainee; therefore, the industrial RSL (800 mg/kg) is used for evaluating COCs for the National Guard Trainee. The reported lead concentration at ASYss-019M (1,200 mg/kg) exceeds the industrial RSL of 800 mg/kg and the surface soil BSV of 26.1 mg/kg. The reported concentrations in all other samples are less than the RSL. Lead is identified as a COC in surface soil because evaluation of the lead soil data indicates soil concentrations are indicative of AOC contamination as described previously (Section 7.2.4.3).

The FWCUG for manganese for the National Guard Trainee (350 mg/kg) is less than the BSVs for surface soil (1450 mg/kg) and subsurface soil (3,030 mg/kg). Therefore, the BSVs are used for identifying COCs. The reported manganese concentrations at ASYss-078M (3,330 mg/kg), ASYss-078 (3,180 mg/kg), ASYss-123M (3,040 mg/kg), and ASYss-084M (3,600 mg/kg) exceed the surface and subsurface soil BSVs. The reported concentrations in all other samples are less than the subsurface soil BSV. Manganese is not identified as a COC because the manganese soil concentrations are not indicative of AOC contamination as described previously (Section 7.2.4.3).

Reported concentrations of one or more of the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene exceed National Guard Trainee FWCUGs in 9 of 24 source area ISM samples at the ASA. As an example of these PAHs, concentrations of benzo(a)pyrene range from 0.12–50 mg/kg compared to the National Guard Trainee FWCUG of 4.77 mg/kg. These PAHs are identified as COCs for Military Training Land Use at the ASA. Reported concentrations of PAHs in three of the four large grid samples that make up the ASA also exceed National Guard Trainee FWCUGs; however, the source area ISM samples provide complete sample

coverage of these grids and better describe the pattern of contamination. Therefore, the discussion focuses on the results of the source area samples. Reported concentrations of all PAHs are less than National Guard Trainee FWCUGs at the IA; therefore, PAHs are not identified as COCs for Military Training Land Use at the IA.

SOR Analysis – No additional COCs or sample locations were identified for the National Guard Trainee exposed to surface soil at the ASA or IA based on the SOR analysis. The SOR analysis is summarized below:

- No FWCUG is available for lead and the industrial RSL used to evaluate the National Guard Trainee is based on an acceptable blood-lead level, not a specific target organ. Therefore, lead was not included in the SOR analysis.
- Six COPCs (aluminum, arsenic, cadmium, chromium, cobalt, and manganese) identified in surface soil have FWCUGs for non-cancer endpoints. An SOR was calculated for each ISM sample (Tables G-23 and G-24). Aluminum, arsenic, chromium, cobalt, and manganese were detected below the BSV at many ISM sample locations. These inorganic chemicals were not included in the SOR for samples where the detected concentration is less than the BSV (i.e., the inorganic chemical is not an SRC in the sample). All calculated SORs are less than one. Therefore, no additional COCs were identified using this analysis.
- Ten COPCs [arsenic, cadmium, cobalt, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in surface soil have FWCUGs for the cancer endpoint. An SOR was calculated for each ISM sample (Tables G-25 and G-26). Arsenic and cobalt were detected below the BSV at many ISM sample locations. These inorganic chemicals were not included in the SOR for samples where the detected concentration is less than the BSV (i.e., the inorganic chemical is not an SRC in the sample). The SORs for carcinogenic COPCs are greater than one in many samples at the ASA (Table G-25), largely due to the contribution from benzo(a)pyrene. COPCs contributing at least 5% to these SORs and identified as COCs are the PAHs benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene. All of these PAHs were previously identified as COCs at the ASA based on single chemical comparison to FWCUGs. All of the samples having SORs >1 have at least one PAH at a concentration greater than the FWCUG. Therefore, no additional COCs or samples were identified at the ASA in this analysis. At the IA, the only sample with an SOR >1 is ASYss-018M with an SOR of 2. This SOR is associated almost entirely (99%) with arsenic. Arsenic is not identified as a COC at the IA based on the WOE presented in Section 7.2.4.3.

COCs in Subsurface Soil (1–13 ft bgs)

The FWCUG Report (USACE 2010a), defines the exposure depths for the National Guard Trainee as deep surface soil (0–4 ft bgs) and subsurface soil (4–7 ft bgs). At Atlas Scrap Yard, the 0–1 ft bgs portion of the deep surface soil interval was characterized using ISM sampling and the deeper portion

(1–4 ft bgs) was characterized using discrete samples from soil borings. Due to different levels of variability in these two data types, these two intervals were evaluated separately. The deeper portion of the deep surface soil interval (1–4 ft bgs) is presented here along with samples collected from 4–7 ft bgs and samples collected from 7–13 ft bgs.

No COCs were identified in subsurface soil samples for the National Guard Trainee, as explained below.

COPCs with EPCs Lower than the National Guard Trainee FWCUG – The EPCs and all individual sample results for all COPCs [i.e., arsenic, cobalt, benz(a)anthracene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] are all lower than the National Guard Trainee FWCUGs at the ASA (Table G-25) and IA (Table G-26).

SOR Analysis – No COCs were identified for the National Guard Trainee exposed to subsurface soil based on the SOR analysis. The SOR analysis is summarized below:

- Arsenic and cobalt are the only non-cancer COPCs identified in subsurface soil. The target organs for these chemicals are skin and thyroid, respectively; therefore, a non-cancer SOR was not calculated.
- Six COPCs [arsenic, benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd)pyrene] identified in subsurface soil have FWCUGs for the cancer endpoint so SORs were calculated (Table G-27). SORs were calculated using the EPCs as well as MDCs. The SORs are less than or equal to one at the ASA and IA.

No COCs were identified in subsurface soil for the National Guard Trainee.

The COCs and ISM sample locations having COCs are summarized in Table 7-11 for the National Guard Trainee.

7.2.5 Uncertainty Assessment

The sources of uncertainty, as well as the potential bias they impart to the risk assessment (i.e., whether conservatism is increased or decreased) and approaches for minimizing their impact on the conclusions of the RI, are briefly discussed below.

7.2.5.1 Uncertainty in Estimating Potential Exposure

Sources of uncertainty in estimating potential human exposure include sampling and analysis limitations, comparison to background concentrations to identify SRCs, and estimation of EPCs.

Sampling Limitations – Uncertainties arise from limits on the media sampled, the total number of samples, specific locations that can be sampled, and the parameters chosen for analysis to

characterize the AOC. In accordance with the PBA08 SAP, potential source area ISM samples (generally 0.01-0.6 acres with three larger samples) were collected from areas biased toward areas anticipated to have the highest level of potential contamination (i.e., around former buildings and stockpiles) to delineate potential sources. In addition, 18 ISM grid samples were used to characterize surface soil (0–1 ft bgs) across the AOC. Characterization of the AOC was achieved using ISM samples with a nominal 4-acre grid size. These large sampling areas fully characterize the potential exposure area at the AOC but do not provide the spatial resolution needed to identify potential source areas.

In addition to the ISM samples, discrete samples are available from the 0–1 ft bgs interval of the soil borings used to evaluate subsurface soil. The results of these discrete samples were considered in the context of the ISM samples in which they were located. The results of the discrete samples are included in Tables 7-7, 7-8, and 7-9. In general, the discrete sample results parallel the conclusions of the ISM samples as noted below:

- All discrete sample results for arsenic are less than the BSV.
- One discrete sample result for lead exceeds all screening levels. This sample is located at the former incinerator near the ISM sample that has lead above the screening levels.
- Two discrete sample results for manganese exceed the subsurface BSV of 3,030 mg/kg. ASYsb-059 (5,480 mg/kg) is located within ISM sample ASYss-013M (1,900 mg/kg) and surrounded by ISM sample ASYss-069M (1,600 mg/kg).ASYsb-046 (3410 mg/kg) is located within ISM samples ASYss-079M (3,180 mg/kg) and ASYss-080M (1,930 mg/kg).
- All four discrete samples analyzed for PAHs at the ASA have reported concentrations above Resident Receptor FWCUGs (e.g., benzo(a)pyrene concentrations range from 0.24–4.5 mg/kg) while only 2 of 15 discrete samples in the IA have PAH concentrations above Resident Receptor FWCUGs (e.g., benzo(a)pyrene concentrations range from 0.028–0.87 mg/kg).

The results of surface soil sampling were used to select locations for discrete subsurface soil sampling that focused on areas with the highest potential for contamination.

Analytical Limitations – Uncertainty is associated with the contaminant concentrations detected and reported by the analytical laboratory. The quality of the analytical data used in the risk assessment was maximized and uncertainty was minimized by implementing QA/QC procedures that specify how samples are selected and handled; however, sampling errors, laboratory analysis errors, and data analysis errors can occur. Beyond the potential for errors, there is normal variability in analytical results.

Some current analytical methods are limited in their ability to achieve detection limits at or below risk-based screening levels. Under these circumstances, it is uncertain whether the true concentration is above or below the screening levels, which are protective of human health.

When analytes have a mixture of detected and non-detected concentrations, EPC calculations may be affected by these detection limits. Risks may be overestimated as the result of non-detected sample concentrations being reported at the method detection limit (MDL), when the actual concentration may be much lower. Risks may be underestimated if analytes that were not detected in any sample are removed from the COPC list. If these analyte concentrations are below the MDL but above the screening level, the risk would not be included in the risk assessment results.

There is some evidence that using stainless steel grinding blades when processing ISM samples could contribute chromium and nickel to the ISM soil samples. However, neither of these metals were identified as COCs at Atlas Scrap Yard; therefore, the impact of the potential contribution from grinding is minimal.

Identification of SRCs – Part of determining SRCs is to identify chemicals detected above the established RVAAP BSVs. This screen does not account for potential sources of chemicals, and BSVs are only available for inorganic chemicals.

Uncertainty associated with screening against background concentrations results from statistical limitations and natural variation in background concentrations. Because of these variations, inorganic chemical concentrations below the BSV likely represent background conditions. Inorganic chemical concentrations above the BSV may be above background concentrations or may reflect natural variation. This is especially true for measured concentrations close to the BSV.

At Atlas Scrap Yard, 10 inorganic SRCs (aluminum, arsenic, barium, cobalt, chromium, iron, manganese, nickel, potassium, and selenium) had MDCs in soil that were above but close to (i.e., less than three times) the BSVs. The consequences of carrying most of these inorganic chemicals forward as SRCs, even if they actually represent background concentrations, is negligible because they are not toxic at near background concentrations. By contrast, naturally occurring arsenic and manganese in soil exceed risk-based FWCUGs. Therefore, the consequence of identifying arsenic or manganese as SRCs if they are, in fact, representative of background can have a significant impact on the conclusions of the risk assessment.

Arsenic concentrations in surface soil (0–1 ft bgs) ISM samples at Atlas Scrap Yard range from 3.7-41 mg/kg, with concentrations in all but two samples below the RVAAP BSV for arsenic in surface soil (15.4 mg/kg) and subsurface soil (19.8 mg/kg). Because building demolition and other earthmoving activities such as removing surface soil and exposing subsurface soil at the surface have disturbed the soil, it is appropriate to compare surface soil sample results to the surface and subsurface BSVs. Other studies indicate arsenic may be naturally occurring in Ohio soils at greater than 20 mg/kg. For example, an environmental study of three locations in Cuyahoga County performed for Ohio EPA (Weston 2012) showed arsenic ranged from 4.6–25.2 mg/kg (22.9 mg/kg excluding statistical outliers) in surface soil (0–2 ft bgs) and 5.3–34.8 mg/kg (22.6 mg/kg excluding statistical outliers) in subsurface soil (2–4 ft bgs). Also, Vosnakis and Perry (2009) published the results of arsenic concentration studies that included 313 samples of Ohio soil. Naturally occurring arsenic in these samples ranged from 1.6–71.3 mg/kg with 95th percentiles of 21.7 mg/kg in surface

soil, 25.5 mg/kg in subsurface soil, and upper tolerance limits of 22.8 mg/kg for surface soil and 29.6 mg/kg for subsurface soil. In other studies, native soil concentrations of arsenic in Ohio have been reported as ranging from 0.5–56 mg/kg (Ohio EPA 1996), and the U.S. Geological Survey's Certificate of Analysis of the Devonian Ohio Shale estimates arsenic concentrations of 68.5 mg/kg are naturally present in bedrock shale (USGS 2004). Based on this information, arsenic appears to be present at Atlas Scrap Yard at naturally occurring concentrations.

Manganese concentrations in surface soil (0–1 ft bgs) ISM samples at Atlas Scrap Yard range from 95–3,600 mg/kg, with concentrations in all but four samples below the RVAAP BSV for manganese in subsurface soil (3,030 mg/kg). Other studies identify naturally occurring manganese in Ohio soils at concentrations ranging from 59-1,750 mg/kg (Weston 2012, Ohio EPA 1996) with concentrations as high as 7,000 mg/kg in the eastern United States (Shacklette and Boerngen 1984). The only potential source of manganese at Atlas Scrap Yard is the slag used as fill and for gravel parking areas and stored railroad ballast. Slag used at RVAAP was sampled as part of the Load Line 2 Phase II RI (USACE 2004). Manganese concentrations in these slag samples ranged from 1,310–7,500 mg/kg. Based on this information, manganese appears to be present at Atlas Scrap Yard at naturally occurring concentrations with a possible contribution from slag particles.

Organic chemicals are not screened against background concentrations, even though some organic compounds are present in the environment as a result of natural or human activities not related to CERCLA releases at the AOC. For example, PAHs are present in the environment as a result of burning fossil fuels and as a component of road dust, vehicle exhaust, tire wear particles, pavement, and slag used as railroad ballast and fill. Samples collected near roadways or parking areas may represent normal "urban" sources of PAHs. These issues represent significant sources of uncertainty at sites where low levels of PAHs are found over large areas of the AOC. At Atlas Scrap Yard, PAHs were detected across the entire AOC, and one or more PAHs were detected in all 54 surface soil samples analyzed for SVOCs. At the ASA, benzo(a)pyrene concentrations ranged from 0.078-50 mg/kg with a median concentration of 3.5 mg/kg. As discussed in Section 5, the April 2011 sampling indicated that high PAH concentrations are associated with the ditch along the access road (ASYss-123M and ASYss-126M) and the parking areas constructed of slag and asphalt gravel (ASYss-116M, ASYss-117M, ASYss-118M, and ASYss-119M). In addition, the samples collected around the railroad ties (ASYss-111M, ASYss-112M, and ASYss-113M) had benzo(a)pyrene concentrations from 0.72–1.4 mg/kg. At the IA, benzo(a)pyrene concentrations ranged from 0.015–4.4 mg/kg with a median concentration of 0.35 mg/kg. The highest PAH concentrations in the IA are reported in samples collected near roads and in gravel parking areas.

Although no BSVs for PAHs were established for RVAAP, the *Phase II Remedial Investigation Report for Winklepeck Burning Grounds* (USACE 2001b), which presented the BSVs for inorganics, included a characterization of naturally occurring background metal concentrations in surface and subsurface soil at Camp Ravenna using samples from outside the process areas. Surface soil samples were collected at 15 locations on the eastern half of Camp Ravenna. These background locations were chosen using aerial photographs and by conducting site visits with the concurrence of Ohio EPA and USACE to (1) reflect areas not impacted by former RVAAP activities and (2) establish background

values that are unaffected by any human activity. The background locations were situated upgradient and generally upwind of known or suspected contaminant sources.

Background sampling was conducted in April and May 1998. All background samples were analyzed for TAL metals, cyanide, and SVOCs. Two of the background samples were also analyzed for VOCs and pesticides/PCBs. The background soil sampling effort established BSVs for naturally occurring metals in soil at former RVAAP/Camp Ravenna.

In establishing BSVs for naturally occurring metals, data were screened to identify outliers in the inorganic chemical results. Ohio EPA guidance (Comment Resolution Meeting, December 2, 1998) called for using upper and lower cutoff limits based on quartiles to identify outliers. The upper cutoff limit is the third quartile (the 75th percentile) plus one and a half times the interquartile range. All results that exceeded the upper cutoff limit were examined to determine if the results should be used in establishing BSVs for naturally occurring metals. Outliers were removed so that background values would most nearly represent natural conditions and exclude human disturbance whether from former RVAAP or pre-RVAAP activities.

Statistical outliers were identified in 5 surface soil and 15 subsurface soil samples. All analytical results for four of these samples [BKGss-011(b)-0794-SO, BKGss-012(b)-0795-SO, BKGss-015(b)-0798-SO, and BKGss-005(b)-0788-SO] were removed from the surface soil background dataset. These four samples were eliminated from the surface soil background dataset since PAHs were elevated and these sampling locations were near pre-existing homes or farms and could have been influenced by activities associated with those structures (e.g., burning wood and fossil fuels, vehicle exhaust, or building materials such as slag used as fill or tar paper and shingles). The other 11 outlier samples were not excluded from the BSV calculations primarily because no SVOCs were detected in those samples and thus the outliers did not appear to be associated with human activities.

Concentrations of PAHs in surface soil at Camp Ravenna associated with pre-RVAAP anthropogenic sources calculated from the 15 RVAAP background surface soil samples are shown in Table 7-12. Since the purpose here is to identify PAH levels associated with anthropogenic activities unrelated to CERCLA releases from operations at former RVAAP, it is appropriate to include all 15 background samples in these calculations. The following criteria were used per the method used in establishing BSVs for naturally occurring metals (USACE 2001b):

- For analytes with a frequency of detection >50%, a distribution (determined using the Shapiro-Wilk test) that is neither normal nor log-normal, and a sample size of 59 or less, the maximum result represents the nonparametric 95% Upper Tolerance Limit (UTL) and was identified as the BSV for naturally occurring metals. These conditions apply to four of the PAHs detected in background samples [benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and chrysene].
- For analytes with a frequency of detection between 0 and 50% with a sample size of 15, the maximum result represents the 99th percentile value and was identified as the BSV for

naturally occurring metals. These conditions apply to the remainder of the PAHs detected in background samples.

These results demonstrate the large variability in environmental concentrations of PAHs. For example, benzo(a)pyrene was detected in 8 of 15 background surface soil samples at concentrations ranging from 0.058-3.7 mg/kg.

Other studies of environmental concentrations of PAHs in Ohio soils show similar variability. For example, in the environmental study of three locations in Cuyahoga County performed for Ohio EPA (Weston 2012), PAHs were detected in only 1 of 36 surface soil samples with a reported concentration of benzo(a)pyrene of 1.33 mg/kg. Aerial photographs indicate this sample was collected near an old road or trail, but no other sources of PAHs are apparent.

In addition to these RVAAP and Cuyahoga County studies, numerous other environmental studies have been conducted that examine environmental levels of PAHs in rural and urban surface soil (e.g., ATSDR 1995, Bradley et al. 1994, IEPA 2005, MADEP 2002, Teaf et al. 2008). Reported minimum, maximum, and 95th percentile concentrations of benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene from numerous studies are shown in Table 7-13.

These studies further demonstrate the high variability in environmental levels of PAHs within a single study area and among multiple studies.

The lack of established RVAAP-specific BSVs for identifying SRCs for PAHs is a source of uncertainty. Evaluating potential former RVAAP process-related sources and other common anthropogenic sources using available PAH environmental data minimizes the impact of this uncertainty on the conclusions of the RI.

Exposure Point Concentrations – Surface soil (0–1 ft bgs) was characterized using ISM. ISM is used to determine an average concentration representative of the soil contained within an ISM sample location (i.e., the "decision unit"). For ISM samples, 30–50 aliquots of surface soil are generally collected from random locations within a decision unit and combined into a single sample. Using ISM reduces the uncertainty associated with estimating a statistical average concentration within a decision unit.

Soil data at Atlas Scrap Yard were aggregated into surface and subsurface soil as described in Section 7.1.1. Based on AOC characteristics and the operational constraints during its use, the sample coverage to define nature and extent of operationally impacted areas of the AOC is adequate.

Potential source area ISM samples (generally 0.01–0.6 acres but also included three 3-acre samples) were collected from areas biased toward locations anticipated to have the highest level of potential contamination (i.e., around former buildings and storage areas) to delineate potential sources. Characterization of the AOC was achieved using ISM grid samples with a nominal 3–4-acre grid size.

These large sample areas characterize the entire AOC, but do not provide the spatial resolution needed to identify potential source areas. Therefore, both types of samples were used in the analysis.

EPCs were calculated for the 1–13 ft bgs subsurface soil sample interval using analytical results from the discrete samples listed in Table 7-2. Soil borings for discrete samples were located in areas of highest potential contamination based on previous sampling results, resulting in calculated EPCs that provide conservative estimates of exposure concentrations across the AOC.

The three representative receptors evaluated may have difference exposure depths and areas of exposure; therefore, in addition to the calculated EPC, the results for each subsurface sample were compared to screening levels (FWCUG and RSL) to identify any small area that may exceed these risk-based levels.

7.2.5.2 Uncertainty in Use of FWCUGs

Sources of uncertainty in the FWCUGs used to identify COCs include selecting appropriate receptors and exposure parameters, exposure models, and toxicity values used in calculating FWCUGs.

Selection of Representative Receptors – Camp Ravenna is a controlled-access facility. Atlas Scrap Yard is located in the southeastern portion of the facility and is not currently used for training. The north-central portion of the AOC is used for storing railroad ties and salvaged inert materials. While residential land use is unlikely, an evaluation using Resident Receptor (Adult and Child) FWCUGs is included to provide an Unrestricted (Residential) Land Use evaluation as required by CERCLA and the U.S. Army. As stated in Paragraph 6.d of the Technical Memorandum, if an AOC fails to meet the Unrestricted (Residential) Land Use, then all three Land Uses [i.e., Unrestricted (Residential) Land Use, Military Training Land Use, and Commercial/Industrial Land Use] will be evaluated.

Exposure Parameters and Exposure Models – For each primary exposure pathway included in the FWCUGs and RSLs, assumptions are made concerning the exposure parameters (e.g., amount of contaminated media a receptor can be exposed to and intake rates for different routes of exposure) and the routes of exposure. Most exposure parameters have been selected so that errors occur on the side of human health protection. When several of these upper-bound values are combined in estimating exposure for a pathway, the resulting risks can be in excess of the 99th percentile and are therefore outside of the range that may be reasonably expected. Consistently selecting upper-bound parameters generally leads to overestimation of potential risks.

Toxicity Values – The toxicity of chemicals is under constant study and values change from time to time. The toxicity values used in calculating FWCUGs were the most recent values available at the time (September 2008). These values are designed to be conservative and provide an upper-bound estimate of risk.

The toxicity and mobility of many inorganic chemicals in the environment depends on the chemical species present. Two important examples are arsenic and chromium. The toxicity values used in

developing FWCUGs are for inorganic arsenic, and do not distinguish between arsenite and arsenate. Chromium is generally present in the environment as either the trivalent (Cr+3) or hexavalent (Cr+6) species, with the trivalent form generally being more stable and, therefore, more common. FWCUGs are available for hexavalent chromium and trivalent chromium.

Trivalent chromium has not been shown to be carcinogenic. It is an essential micronutrient but can also be toxic at high doses (i.e., above the RfD used to calculate the FWCUG). FWCUGs for trivalent chromium are based on non-cancerous effects. Hexavalent chromium is much more toxic than trivalent chromium. It is classified as a "known human carcinogen" and may also cause non-cancerous effects. The cancer URF for hexavalent chromium published in USEPA's Integrated Risk Information System (IRIS) is based on epidemiological data on lung cancer in workers associated with chromate production. Workers in the chromate industry are exposed to trivalent and hexavalent compounds of chromium. The cancer mortality in the study used to establish the URF was assumed to be due to hexavalent chromium. It was further assumed that hexavalent chromium constituted no less than one-seventh of the total chromium in air that the workers were exposed to. As noted in IRIS, the assumption that the ratio of hexavalent to trivalent chromium was 1:6 in this study may lead to a sevenfold underestimation of risk when using this URF to evaluate exposure to hexavalent chromium alone.

To avoid the underestimation of risk, selecting the FWCUG for chromium includes a step that compares the maximum concentration of hexavalent chromium detected in chromium speciation samples to the residential RSL for hexavalent chromium of 3 mg/kg. Concentrations of hexavalent chromium in chromium speciation samples that are less than or equal to 3 mg/kg indicate that hexavalent chromium is not present above the hexavalent chromium FWCUGs and supports using the trivalent chromium FWCUGs for evaluation of total chromium. Using speciation samples to identify the appropriate FWCUG minimizes the associated uncertainty.

FWCUGs Below Background Concentrations – One purpose of the HHRA process is to identify COCs and cleanup goals for evaluating remedial alternatives for remediating residual contamination that has resulted from process operations at the AOC. The FWCUGs are risk-based values. In some cases, natural or anthropogenic background concentrations unrelated to process operations exceed the risk-based FWCUGs. For naturally occurring inorganic chemicals, this problem is addressed by using the BSV as the cleanup goal. This introduces uncertainty in the chosen cleanup goal because there is uncertainty in assigning a specific value to background, which can be highly variable.

No BSVs are available for organic chemicals, although PAHs are often present in the environment from natural and anthropogenic sources and regulatory standards are often much lower than environmental levels of PAHs in urban and rural surface soil, especially near areas of vehicle traffic (e.g., roads and parking areas). Given their frequent presence in environmental media, especially in areas influenced by vehicle exhaust and tire particles, it is important to compare risk-based cleanup levels with typical environmental concentrations before utilizing unrealistically low cleanup targets. Numerous studies have been conducted that examine ambient levels of PAHs in rural and urban surface soil (ATSDR 1995, Bradley et al. 1994, MADEP 2002, Teaf et al. 2008). These studies

indicate that given the multitude of non-point mobile sources for PAHs, it is not uncommon for ambient concentrations to exceed health-based regulatory recommendations. Some states have begun to include consideration of ambient anthropogenic levels by establishing minimum screening levels based on environmental studies. For example, the New York State Department of Environmental Conservation has established a minimum soil cleanup objective of 1.0 mg/kg for benz(a)anthracene, benzo(a)pyrene, and benzo(b)fluoranthene and 0.1 mg/kg for dibenz(a,h)anthracene, based on the 95th percentile concentrations of these PAHs in rural areas near roads (NYSDEC 2006).

7.2.5.3 Uncertainty in the Identification of COCs

All sources of uncertainty described in previous sections potentially impact the identification of COCs. The exposure and toxicity values used to calculate FWCUGs and RSLs, as well as the approach for identifying SRCs, COPCs, and ultimately COCs based on FWCUGs and RSLs, were designed to ensure the overestimation rather than underestimation of potential risks. The uncertainty assessment attempts to put the identified COCs in perspective to facilitate informed risk management decisions for the AOC.

The SOR is used to account for potential additive effects from exposure to multiple chemicals that can cause the same effect or affect the same target organ. Cancer risk is assumed to be additive for all carcinogens. Non-cancer risk is assumed to be additive for chemicals with similar sites of toxicological action. In the event that any combination of COPCs results in synergistic effects, risk might be underestimated. Conversely, the assumption of additivity would overestimate risk if a combination of COPCs acted antagonistically. It is unclear whether the potential for chemical interaction has been inadvertently understated or overstated. It seems unlikely that the potential for chemical interaction contributes significant uncertainty to the conclusions of the risk assessment.

7.2.6 Summary of HHRA

This HHRA documents COCs that may pose potential health risks to human receptors resulting from exposure to contamination at Atlas Scrap Yard. This HHRA was conducted as part of the RI and was based on the streamlined approach described in the FWCUG Report (USACE 2010a), Position Paper for Human Health FWCUGs (USACE 2012b), and Technical Memorandum (ARNG 2014). The components of the risk assessment (receptors, exposure media, EPCs, and results) are summarized below.

Receptors – Camp Ravenna is a controlled access facility. Atlas Scrap Yard is located in the central portion of the facility and is currently used for storing railroad ties and salvaged inert materials. Three Land Uses for the RVAAP restoration program are specified in the Technical Memorandum (ARNG 2014) for consideration in the RI along with their Representative Receptors. Unrestricted (Residential) Land Use [Resident Receptor (Adult and Child)] is considered protective for all three Land Uses at Camp Ravenna. Therefore, if an AOC meets the requirements for Unrestricted (Residential) Land Use, then the AOC is also considered to have met the requirements of the other Land Uses (i.e., Commercial/Industrial and Military Training). Commercial/Industrial Land Use

[Industrial Receptor] is considered protective of all uses other than Residential. Military Training Land Use is represented by the National Guard Trainee. All three Land Uses [i.e., Unrestricted (Residential) Land Use, Military Training Land Use, and Commercial/Industrial Land Use] are evaluated in this HHRA.

Exposure Media – Media of concern at Atlas Scrap Yard are surface soil and subsurface soil. Soil at Atlas Scrap Yard was evaluated in two EUs. The ASA occupies the north-central portion of the AOC and was historically used for stockpiling a variety of bulk materials. This area is currently used for storing salvaged inert materials, including railroad ties, concrete, and brick. The IA makes up the remainder of Atlas Scrap Yard, outside the ASA. Surface water and sediment samples were not collected within the AOC during the PBA08 RI, as perennial surface water bodies are not present at the AOC.

Estimation of EPCs – Although Atlas Scrap Yard was assessed as two EUs (ASA and IA), exposure to surface soil was based on ISM samples. The ISM was used to determine an average concentration representative of the soil contained within a defined area (i.e., the "decision unit"). Therefore, individual ISM results were compared directly to the surface soil FWCUGs for the Atlas Scrap Yard receptors. Subsurface soil was evaluated using discrete data from soil borings. Subsurface soil EPCs were calculated as either the depth weighted 95% UCL of the mean or the MDC, whichever value is lowest. Individual subsurface samples were also evaluated.

Results of Human Health Risk Assessment – Five PAHs [benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, and dibenz(a,h)anthracene] were identified as COCs at the ASA for all three Land Use scenarios. The extent of contamination exceeding screening levels varies by receptor (i.e., a larger area is considered contaminated for the Resident Receptor than for Industrial Receptor). Contamination is limited to surface soil (0–1 ft bgs) and no COCs were identified in subsurface soil. Table 7-9 provides a list of all samples collected at Atlas Scrap Yard and identifies sample concentrations of benzo(a)pyrene (as a representative PAH) exceeding screening levels for the various receptors. This information is presented graphically in Figure 7-3. At the ASA, PAHs are present at high concentrations due to sources such as traffic on roads and parking areas made up of slag and asphalt gravel, and storage of railroad ties and ballast. The slag/asphalt gravel parking area is the primary source of PAHs. The ASA has been utilized as a stockpile storage area for bulk material, including gravel, railroad ballasts, sand, culvert pipe, railroad ties, and telephone poles. This north central portion of Atlas Scrap Yard is still actively utilized for ongoing materials storage, including concrete footers. The highest concentrations of PAHs are reported for samples collected from a slag/gravel/crushed asphalt parking area adjacent to the railroad tie storage pile and the drainage ditch paralleling the north/south road and collecting runoff from the road and parking and storage areas. Concentrations of these PAHs exceed cleanup goals associated with the Resident Receptor, Industrial Receptor, and National Guard Trainee. Therefore, these PAHs are identified as COCs for all three Land Uses at the ASA and require evaluation of remedial alternatives. Table 7-14 provides a summary of all of the ISM sample locations having PAHs above screening levels for the three receptors.

At the IA, lead was identified as the only COC requiring remediation. Lead at the location of the former incinerator (sample ASY-019M) had an elevated concentration of 1,200 mg/kg. This concentration exceeds cleanup goals associated with the Resident Receptor, Industrial Receptor, and National Guard Trainee; therefore, this location requires remediation to be protective of all three Land Use scenarios. The risk associated with this location appears to be confined to the surface soil, as nearby boring ASYsb-064 had lead concentrations of 18.4J mg/kg from 1–4 ft bgs and 33 mg/kg from 4–7 ft bgs, well below any applicable cleanup goals. However, any remedial activities associated with surface soil at the former incinerator would require confirmation that the contamination is confined to surface soil (0–1 ft bgs).

PAHs are present at the IA but at much lower concentrations than the ASA and are associated with gravel roads and parking areas, including traffic on the main entrance to Atlas Scrap Yard. PAH concentrations at the IA are similar to those reported from normal urban and traffic sources and do not represent a release. Consequently, these PAHs do not require evaluation of remedial alternatives at the IA.

7.3 ECOLOGICAL RISK ASSESSMENT

The ERA presented in this RI Report follows a unified approach of methods, integrating U.S. Army, Ohio EPA, and USEPA guidance. This ERA approach is consistent with the general approach by these agencies and primarily follows the Level I Scoping ERA, Level II Screening ERA, and Level III Baseline ERA outlined in the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008), with specific application of components from the FWERWP, *Risk Assessment Handbook Volume II: Environmental Evaluation* (USACE 2010b), and *Ecological Risk Assessment Guidance for Superfund: Process for Designing and Conducting Ecological Risk Assessments* (USEPA 1997). The process implemented in this RI Report combines these guidance documents to meet requirements of the Ohio EPA and U.S. Army, while following previously accepted methods established for RVAAP. This unified approach resulted from coordination between USACE and Ohio EPA during the summer of 2011.

7.3.1 Scope and Objective

Atlas Scrap Yard contains terrestrial and aquatic habitat that supports ecological receptors. The terrestrial habitats have known chemical contamination (MKM 2007). Habitat types and an assessment of the ecological resources found at Atlas Scrap Yard are presented in subsequent subsections. Additionally, the results of a historical ERA (an ERS performed as part of the Characterization of 14 AOCs) and the PBA08 RI are provided to determine whether a qualitative ERA (Level I) is sufficient, based on the quality of the habitat and the presence of contamination, or whether a more rigorous ERA (Level II or Level III) should be conducted.

Under the scope of this RI Report, the term sediment equates to frequently or permanently inundated wet sediment as defined by RVAAP guidelines. Dry sediment refers to unconsolidated inorganic and organic material within natural conveyances, drainage ditches, or low-lying areas that occasionally

may be covered with water, usually following a precipitation event or due to snowmelt. Dry sediment is not covered with water for extended periods and typically is dry within seven days of a precipitation event. Dry sediment does not function as a permanent habitat for aquatic organisms, although it may serve as a natural medium for the growth of terrestrial organisms. These definitions and terminology usage are consistent with the FWCUG Report.

Using the definitions in the FWCUG Report, sediment and perennial surface water are not media of concern evaluated within this RI Report, as surface water is only present at the AOC during and immediately after times of heavy rainfall. The entire ground surface at the AOC is evaluated as soil in the nature and extent characterization, fate and transport evaluation, HHRA, and ERA. Consequently, the media evaluated in the nine identified wetlands at Atlas Scrap Yard (including eight seasonally inundated and one more frequently inundated wetland) are considered soil for risk assessment purposes. It should be noted that wetland classification methods [e.g., the Ohio Rapid Assessment Method (ORAM)] might define some or all of the wetlands at Atlas Scrap Yard as sediment. However, classifying the media at Atlas Scrap Yard as soil is most appropriate because the sediment screening values are typically developed for use in permanently inundated water bodies (e.g., ponds and streams) that do not exist at Atlas Scrap Yard. Thus, surface sSSLs are more appropriate for use at Atlas Scrap Yard.

7.3.2 Level I: Scoping Level Ecological Risk Assessment

The ERA method for Level I follows guidance documents listed in Section 7.3.1. Level I is intended to evaluate if the AOC had past releases, the potential for current contamination, and if there are important ecological resources in or near the AOC.

The following two questions should be answered when the Level I ERA is complete:

1. **Are current or past releases suspected at the AOC?** Current or past releases are determined by evidence that chemical contaminants or COPECs are present.
2. **Are important ecological resources present at or in the locality of the AOC?** Important ecological resources are defined in the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and *Technical Document for Ecological Risk Assessment: Process for Developing Management Goals* (BTAG 2005).

If an AOC has contaminants but lacks important ecological resources, the ERA process can stop at Level I. Contamination and important ecological resources must both be present to proceed to a Level II Screening Level ERA.

7.3.2.1 AOC Description and Land Use

Atlas Scrap Yard is approximately 73 acres. Atlas Scrap Yard was evaluated as two EUs: the ASA EU (14 acres) in the north-central portion of the AOC, including all active storage and process areas,

and the IA EU (59 acres) outside the ASA. Both areas were evaluated collectively in this ERA. In addition to evaluating the entire AOC, Wetlands 1, 6, 8, and 9 were evaluated individually.

Important aquatic resources exist on the AOC, including nine wetlands. The habitat is mostly herbaceous vegetation, with smaller amounts of shrubland, forests, and wetlands. The size of the habitat is large enough to completely support cover and food for small birds and mammals that typically require approximately 1 acre (USEPA 1993). The habitat area at Atlas Scrap Yard represents 0.3% of the 21,683 acres at Camp Ravenna.

7.3.2.2 Evidence of Historical Chemical Contamination

The goal of the historical ERA (MKM 2007) was to identify COPECs in soil for Atlas Scrap Yard. The historical ERA also identified COPECs for sewer sediment and water. The Facility-wide Sewers (storm and sanitary sewer systems) are identified as a separate AOC, designated as RVAAP-67. The risk in the sewer sediment and surface water at Atlas Scrap Yard is evaluated in a separate report specific to the Facility-wide Sewers. Sewer samples and COPECs identified in the historical ERA are not discussed in this report.

The historical ERA followed instructions presented in the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2003) and consisted of the first two of the six steps listed in Figure III of the FWERWP. These two steps identify the evaluation procedures, which were used to determine AOC-related COPECs. First, the MDC of each chemical was compared to its respective facility-wide background concentration. Chemicals were not considered COPECs if the MDC was below the background concentration. For all chemicals detected above background concentrations, the MDC was compared to an ESV. The hierarchy of screening values was based on the guidance included in the FWERWP and *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2003). In addition to the ESV comparison, it was determined if the chemical was a persistent, bioaccumulative, and toxic (PBT) compound. Chemicals were retained as COPECs if they exceeded background concentrations and the ESV, if the chemical exceeded background concentrations, and had no toxicity information, or if the chemical was a PBT compound.

Groundwater was not included in the historical ERA. As explained in Section 3.2.2 of the FWERWP, groundwater is not considered an exposure medium to ecological receptors because these receptors are unlikely to contact groundwater greater than 5 ft bgs. The water table at Atlas Scrap Yard occurs in the unconsolidated zone at 5.2–17.0 ft bgs.

The historical ERA table for soil is included in Appendix Table H-1 and contains the following:

- Frequency of detection;
- Average concentration;
- MDC;
- Background concentration for soil;
- Comparison of MDC to background concentrations;

- ESVs used for COPEC determinations;
- Comparison of MDC to screening values;
- PBT compound identification;
- COPEC determination; and
- COPEC rationale.

Historical COPECs for Soil – The historical ERA conducted as part of the Characterization of 14 AOCs reported 51 chemicals in surface soil (0–1 ft) (MKM 2007). Of the 51 chemicals detected, four chemicals (calcium, magnesium, potassium, and sodium) were essential nutrients and were excluded from the COPEC screen. Forty-six chemicals were determined to be SRCs because they either exceeded background concentrations or did not have an associated background concentration for comparison. Fourteen inorganic chemicals (aluminum, arsenic, barium, cadmium, chromium, copper, iron, lead, manganese, mercury, nickel, selenium, silver, and zinc), one pesticide (aroclor 1260), and four organic chemicals [benzo(a)pyrene, bis(2-ethylhexyl) phthalate, butylbenzyl phthalate, and naphthalene] were identified as COPECs because detected concentrations were above ESVs. Six other chemicals (4-methylphenol; dibenzofuran; 2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; and nitrocellulose) were also identified as COPECs due to a lack of ESV. Twenty-five chemicals were identified as COPECs in soil (Table 7-15). Appendix Table H-1 presents the ecological screening for soil.

Historical COPECs for Sediment – No historical sediment samples were collected at the AOC, except those from the sewers.

Historical COPECs for Surface Water – No historic surface water samples were collected at the AOC, except those from the sewers.

Summary of Historical ERA – As explained previously, a historical ERA was performed to determine COPECs in surface soil at Atlas Scrap Yard. The COPECs are summarized in Table 7-15. Based on the identification of COPECs, ecological risk in surface soil was predicted in the historical investigation, and an additional investigation was recommended for Atlas Scrap Yard (MKM 2007).

7.3.2.3 Ecological Significance

Sources of data and information about the ecological resources at Atlas Scrap Yard include the Integrated Natural Resources Management Plan (INRMP) (OHARNG 2014), *Facility-Wide Biological and Water Quality Study* (USACE 2005a), previous characterization work (e.g., Characterization of 14 AOCs), and visits to the AOC conducted for the PBA08 RI.

One of the two key questions to answer in the Level I Scoping ERA is whether there are ecologically important and especially ecologically significant resources at Atlas Scrap Yard. Ecological importance is defined as a place or resource that exhibits unique, special, or other attributes that makes it of great value. Ecological significance is defined as an important resource found at an AOC or in its vicinity that is subject to contaminant exposure. The underlying basis for this distinction can

be found in *Ecological Significance and Selection of Candidate Assessment Endpoints* (USEPA 1996a), stated as follows:

> *"A critical element in the ERA process requires distinguishing important environmental responses to chemical releases from those that are inconsequential to the ecosystem in which the site resides: in other words, determining the ecological significance of past, current, or projected site-related effects."*

Important places and resources identified by the U.S. Army and Ohio EPA (Appendix Table H-2) include wetlands, terrestrial areas used for breeding by large or dense aggregations of animals, habitat known to be used by threatened or endangered species, state land designated for wildlife or game management, locally important ecological places, and state parks. The U.S. Army and Ohio EPA recognize 17 important places and resources. The U.S. Army recognizes an additional 16 important places (BTAG 2005), and the Ohio EPA recognizes another 6 important places (Ohio EPA 2008). In total, there are 39 important places. Presence or absence of an ecologically important place can be determined by comparing environmental facts and characteristics of Atlas Scrap Yard with each of the important places and resources listed in Appendix Table H-2.

Ecological significance is defined as an important resource found at an AOC or in its vicinity that is subject to contaminant exposure. Thus, any important places and resources listed in Appendix Table H-2 are elevated to ecologically significant when present in the AOC and there is exposure to contaminants. For all 39 important places and resources, it is relatively clear whether the ecological place or resource is present or absent on the AOC; therefore, the decision process is objective. If no important or significant ecological resource is present at an AOC, the evaluation will not proceed to Level II regardless of the presence of contamination. Instead, the Level I Scoping ERA would acknowledge there are important ecological places, but that those resources are not ecologically significant and no further evaluation is required.

Management Goals for the AOC – Regardless of whether the evaluation is concluded at Level I or continues to Level II, there is another level of environmental protection for Atlas Scrap Yard through the natural resource management goals expressed in the INRMP (OHARNG 2014). The U.S. Army is required to monitor ecological conditions to maintain or enhance the current integrity of the natural resources and ecosystem. While the monitoring focuses on the potential adverse effects from training activities, degradation from contamination would be noticed as well.

Some natural resources management goals of OHARNG (listed in Appendix Table H-3) benefit Atlas Scrap Yard, including Goal 1 which requires management of natural resources to be compatible with the military mission, and Goal 5 which requires the U.S. Army to sustain usable training lands and native natural resources by implementing a natural resource management plan that incorporates invasive species management and utilizes native species mixes for revegetation after ground disturbance activities. These management goals help detect degradation (whether from training

activities or historical contamination). While the applicability of the remaining 10 management goals to Atlas Scrap Yard varies, all of the management goals are intended to monitor, maintain, or enhance the facility's natural resources and ecosystem. Additionally, these goals are for managing all types of resources at and near Atlas Scrap Yard; however they do not affect decisions concerning the presence or absence of important or significant ecological places or resources.

Important Places and Resources – Ecological importance means a place or resource that exhibits a unique, special, or other attribute that makes it of great value. Examples of important places and resources include wetlands, terrestrial areas used for breeding by large or dense aggregations of animals, and habitat of state-listed or federally listed species. An important resource becomes significant when found on an AOC and there is contaminant exposure. Some of the wetlands (based on their ORAM category, size, and location) at Atlas Scrap Yard are important/significant ecological resources.

Terrestrial Resources – Atlas Scrap Yard is dominated by terrestrial resources, as described below.

***Habitat Descriptions and Species*.** The INRMP and AOC visits by Leidos scientists indicated Atlas Scrap Yard consisted of five vegetation types (Figure 7-4). Atlas Scrap Yard is dominated by dry, early-successional, herbaceous field (HU1) in the central part of the habitat area. Four other vegetation types are present at the AOC: dry, late-successional, cold-deciduous shrubland (SU2) along the western side and southwestern corner of the habitat area; red maple (*Acer rubrum*) successional forest (FU4) in the northwest corner and southern boundary of the habitat area; pin oak (*Quercus palustris*)/swamp white oak (*Quercus bicolor*) seasonally flooded forest alliance (FL4) in the northeastern corner and center of the habitat area; and cattail (*Typha angustifolia*, *T. latifolia*)/bulrush (*Scirpus* spp.) semi-permanently flooded herbaceous alliance (HL4) vegetation in the northeastern corner. This characterization was originally established by a vegetation study using aerial photography and field verification (USACE 1999) and was later used in the INRMP (OHARNG 2014).

On May 18, 2010, Leidos biologists conducted field surveys at Atlas Scrap Yard and determined there have been small changes in vegetation at the AOC since 1999 (USACE 1999), including the conversion of portions of the dry, early-successional, herbaceous field habitat to dry, late-successional, cold-deciduous shrubland. The small cattail-bulrush wetland and large blocks of forested habitat have remained relatively unchanged.

The habitats at Atlas Scrap Yard were assessed to be healthy and functioning, based on May 2010 (Photographs 7-1 and 7-2) observations. Functional habitat was determined by noting the absence of large bare spots and dead vegetation or other obvious visual signs of an unhealthy ecosystem. Additional habitat photographs are provided in Appendix H.

Threatened, Endangered, and Other State-listed or Federally Listed Species. The northern long-eared bat (*Myotis septentrionalis*; federally threatened) exists at Camp Ravenna. There are no other federally listed species and no critical habitat on Camp Ravenna. Atlas Scrap Yard has not been

previously surveyed for state-listed or federally listed species; however, there have been no documented sightings of state-listed, federally listed, threatened, or endangered species at the AOC (OHARNG 2014).

***Other Terrestrial Resources*.** While there are no known important terrestrial places and resources (Appendix Table H-2), there are other resources at or near Atlas Scrap Yard (e.g., vegetation, animals) that interact in their ecosystems and support nutrient cycling and energy flow. For example, wildlife such as wild turkey (*Meleagris gallopavo*) and white-tailed deer (*Odocoileus virginianus*) could use the area. The INRMP provides information about species and habitat surveys at Camp Ravenna (e.g., timber and ecological succession) (OHARNG 2014). There are no other reported surveys of habitats and wildlife at Atlas Scrap Yard beyond those summarized in the INRMP (OHARNG 2014).

Aquatic Resources – Atlas Scrap Yard has aquatic resources. There are no ponds or streams at the AOC; however, nine wetlands (described below) are present at Atlas Scrap Yard.

Habitat Descriptions and Species. As noted, the only aquatic resources at Atlas Scrap Yard are wetlands. Surface water flows intermittently in small drainage ditches bordering the roads (Figure 3-1). These ditches are dry during most of the year; however, stagnant water was observed during April and May 2010 in the drainage ditch parallel to Paris-Windham Road because stormwater runoff could not drain from this conveyance due to downstream beaver dams obstructing surface water flow.

Precipitation data from Camp Ravenna are provided in Section 3.5. The storm frequency is 35 days per year, and precipitation occurs 154 days per year. This is a sufficient amount of precipitation to create and maintain wetlands at Atlas Scrap Yard.

Wetlands. Wetlands are important resources with water-saturated soil or sediment and plant life that can survive saturation. Wetlands are home to many different species and are also chemical sinks that can serve as detoxifiers and natural water purifiers. Nine wetlands are present within the AOC (Figure 7-4). Eight of the nine wetlands at the AOC are ephemeral; they contain standing water only for relatively short periods of time following rain events and are not expected to support aquatic biota or aquatic plants that cannot survive persistent dry conditions. Per the definitions in the FWCUG Report, the media in these wetlands are considered soil. One of the wetlands (Wetland 1) holds water more frequently but not permanently.

There are nine planning level survey [i.e., based on desktop surveys conducted for the OHARNG of wetland data and resources (e.g., National Wetlands Inventory maps, aerials)] wetlands and wetland complexes at Atlas Scrap Yard (Figure 7-4). No jurisdictional wetlands determination has been conducted at this AOC. For any wetland at the AOC potentially affected by remedial activities, a jurisdictional determination by USACE would be required to determine the regulatory status.

A Leidos Professional Wetland Scientist used ORAM (Ohio EPA 2001) in May 2010 to assess the condition of the wetlands discussed at the Atlas Scrap Yard (Appendix Figures H-1 through H-9).

The ORAM evaluation included the total area of a wetland or wetland complex, not just the portion of a wetland within the AOC boundary.

Using ORAM, wetlands are classified into three categories:

- Category 1 wetlands are described as "limited quality waters." They are considered to be a resource that has been degraded, has limited potential for restoration, or is of such low functionality that lower standards for avoidance, minimization, and mitigation can be applied. Scores range from 1 to 29.
- Category 2 includes wetlands of moderate quality and wetlands that are degraded but exhibit reasonable potential for restoration. Scores range from 30 to 59.
- Category 3 includes wetlands of very high quality and wetlands of concern regionally and/or statewide, such as wetlands that provide habitat for species listed as threatened or endangered. Scores range from 60 to 100.

The field sheets detailing the ORAM at Atlas Scrap Yard are presented in Appendix Figures H-1 through H-9. Table 7-16 summarizes ORAM scores and other characteristics for each wetland at Atlas Scrap Yard. Figure 7-4 shows the locations of the wetlands.

Wetland 1: Wetland 1 is a small wetland complex that covers 0.5 acres in the northeastern corner of the AOC. The wetland is located entirely within Atlas Scrap Yard. This area is more frequently inundated than other Atlas Scrap Yard wetlands and is surrounded by seasonally flooded forested habitat. Relief at this portion of the AOC slopes downward to a topographic low in the central-eastern boundary of the AOC leading to the ditch along Paris-Windham Road. Based on the ORAM, Wetland 1 is classified as Category 2 (with a final score of 49), which indicates moderate wetland quality with some minor impairment of wetland functions and conditions (Appendix Figure H-1).

Wetland 2: Wetland 2 is a very small, seasonally flooded/saturated 0.05-acre emergent/scrub-shrub wetland located near the eastern boundary, within 200 ft of Paris-Windham Road. The wetland is located entirely within Atlas Scrap Yard. The scrub-shrub habitat in Wetland 2 has developed in recent years as disturbance from mowing has diminished. The wetland has also increased in size over time, largely as a result of beaver dams built downstream within and north of Load Line 12. The downstream beaver dams obstruct surface water flow, resulting in periodic ponding of water at Atlas Scrap Yard. Topographic relief at this portion of the AOC slopes downward to the ditch along Paris-Windham Road. When the beaver dams do not obstruct surface water flow, surface water in the ditch flows through Load Line 12, Upper and Lower Cobbs Ponds, and ultimately to Sand Creek a few thousand feet north of Atlas Scrap Yard. Based on the ORAM, Wetland 2 is classified as Category 1 (with a final score of 29), which indicates low wetland quality with some impairment of wetland functions and conditions (Appendix Figure H-2).

Wetland 3: Wetland 3 is a very small (0.05 acres), seasonally flooded/saturated forested wetland near the southeastern corner of Atlas Scrap Yard. The wetland is located entirely within Atlas Scrap Yard. Topographic relief at this portion of the AOC slopes downward to a ditch along Paris-Windham

Road. Surface water in the ditch flows through Load Line 12, Upper and Lower Cobbs Ponds, and ultimately to Sand Creek a few thousand feet north of Atlas Scrap Yard. Based on the ORAM, Wetland 3 is classified as Category 2 (with a final score of 33), which indicates moderately good wetland quality with some moderate impairment of wetland functions and conditions (Appendix Figure H-3).

Wetland 4: Wetland 4 is a very small (0.03 acres), seasonally flooded/saturated emergent wetland near the center of Atlas Scrap Yard. The wetland is located entirely within Atlas Scrap Yard. It appears to be an isolated wetland and is the topographic low of the immediate area. There are no ditches or natural conveyances that drain water offsite from this portion of the AOC. Based on the ORAM, Wetland 4 is classified as Category 1 (with a final score of 19), which indicates low wetland quality with some impairment of wetland functions and conditions. It was noted in the May 2010 site visit that Wetland 4 had been disturbed by recent activities at the AOC (Appendix Figure H-4).

Wetland 5: Wetland 5 is a small (0.45 acres), seasonally flooded/saturated scrub-shrub wetland in the north-central part of Atlas Scrap Yard. The wetland is located entirely within Atlas Scrap Yard. It appears to be an isolated wetland and is the topographic low of the immediate area. There are no ditches or natural conveyances that drain water offsite from this portion of the AOC. Based on the ORAM, Wetland 5 is classified as Category 1 (with a final score of 25), which indicates low wetland quality with some impairment of wetland functions and conditions. It was noted in the May 2010 site visit that Wetland 5 was disturbed by recent demolition activities at the AOC (Appendix Figure H-5).

Wetland 6: Wetland 6 is a seasonally flooded/saturated forested wetland in the northwestern corner of the AOC, adjacent to Newton Falls Road. The wetland is 3.35 acres, but only 0.1 acres are inside Atlas Scrap Yard. The remainder of the wetland complex extends west of the AOC. Wetland 6 slopes downward to a topographic low north of the AOC to the ditch along Newton Falls Road. Water in this ditch ultimately drains north through a series of off-site drainage ditches, ultimately to Sand Creek, located a few thousand feet north of the AOC. Based on the ORAM, Wetland 6 is classified as Category 2 (with a final score of 37), which indicates moderate wetland quality with some moderate impairment of wetland functions and conditions (Appendix Figure H-6).

Wetland 7: Wetland 7 is a small (0.39 acres), seasonally flooded/saturated, emergent wetland in the northeast corner of the AOC at the intersection of Newton Falls Road and Paris-Windham Road. The wetland is located entirely within Atlas Scrap Yard. Wetland 7 slopes downward to a topographic low east of the AOC to the ditch along Paris-Windham Road. Surface water in the ditch flows through Load Line 12, Upper and Lower Cobbs Ponds, and ultimately to Sand Creek a few thousand feet north of Atlas Scrap Yard. Based on the ORAM, Wetland 7 is classified as Category 1 (with a final score of 29), which indicates low wetland quality with some impairment of wetland functions and conditions (Appendix Figure H-7).

Wetland 8: Wetland 8 is a moderately large, seasonally flooded/saturated, forested wetland complex along the southern border of the AOC. The wetland is 2.1 acres, but only 1.42 acres are inside Atlas Scrap Yard. The remainder of the wetland complex extends south of the AOC. Wetland 8 slopes to a

topographic low, east of the AOC, to the ditch along Paris-Windham Road. Surface water in the ditch flows through Load Line 12, Upper and Lower Cobbs Ponds, and ultimately to Sand Creek a few thousand feet north of Atlas Scrap Yard. Based on the ORAM, Wetland 8 is classified as Category 2 (with a final score of 43), which indicates moderate wetland quality with some moderate impairment of wetland functions and conditions (Appendix Figure H-8).

Wetland 9: Wetland 9 is a small, seasonally flooded/saturated, forested wetland complex along the southern border of the AOC. The wetland is 0.9 acres, but only 0.03 acres are inside Atlas Scrap Yard. The remainder of the wetland complex extends south and west of the AOC. Wetland 9 slopes to a topographic low, east of the AOC, to the ditch along Paris-Windham Road. Surface water in the ditch flows through Load Line 12, Upper and Lower Cobbs Ponds, and ultimately to Sand Creek a few thousand feet north of Atlas Scrap Yard. Based on the ORAM, Wetland 9 is classified as Category 2 (with a final score of 42), which indicates moderate wetland quality with some moderate impairment of wetland functions and conditions (Appendix Figure H-9).

Based on their ORAM category, size, and location, Wetlands 1, 6, 8, and 9 are considered important/significant ecological resources.

***Threatened and Endangered and Other State-listed or Federally Listed Species*.** The northern long-eared bat (*Myotis septentrionalis*; federally threatened) exists at Camp Ravenna. There are no other federally listed species and no critical habitat on Camp Ravenna. Atlas Scrap Yard has not been previously surveyed for state-listed or federally listed threatened or endangered species; however, there have been no documented sightings of state-listed or federally listed threatened or endangered species at the AOC (OHARNG 2014).

Other Aquatic Resources. There are no other known aquatic resources (Appendix Table H-2) at or near the AOC (e.g., vegetation, animals). There are no other reported surveys of aquatic habitats and wildlife at Atlas Scrap Yard beyond those summarized in the INRMP (OHARNG 2014).

Ecosystem and Landscape Roles and Relationships – Four spatial areas were evaluated to assess the ecosystem and landscape roles and relationships: the AOC, the vicinity of the AOC, the entire Camp Ravenna, and the northeastern or ecoregion of Ohio. Information about the first spatial area (the AOC) is provided in the terrestrial and aquatic resources subsections above.

Vicinity of the AOC. Six vegetation communities border Atlas Scrap Yard (Figure 7-4), including herbaceous field, shrubland, and forest communities similar to the vegetation observed at the AOC. There are no apparent differences in habitat quality of these plant communities inside or outside of the AOC. For example, the dry, herbaceous fields extend several hundred feet beyond the western AOC boundary. The red maple successional forest extends a few hundred feet beyond the southern boundary. Pockets of the pin oak/swamp white oak, seasonally flooded forest alliance occur to the north and across Paris-Windham Road to the east. These types and qualities of habitat are not unique and can be found at many other areas within Camp Ravenna.

Figure 7-4 shows there are nine wetlands inside the AOC. Other wetlands of varying sizes are located near the eastern, western, and northern boundaries of the habitat area.

The closest recorded state-listed or federally listed species [four-toed salamander (*Hemidactylium scutatum*)] is located approximately 400 ft north of the AOC (Table 7-17) (OHARNG 2014); it is a state species of concern. The next closest state-listed species [least flycatcher (*Empidonax minimus*)], is located approximately 850 ft west of the AOC, and is a state species of interest.

No beaver dams are located in the AOC. There are three beaver dams near the AOC (400 ft east, 700 ft east, and 700 ft north) but their existence may be ephemeral.



Photograph 7-1. Habitat of Herbaceous and Shrubland Fields in Foreground and Forest in Background at Atlas Scrap Yard (looking southeast from access road, May 17, 2010)



Photograph 7-2. Oak Forest Vegetation (looking south from Newton Falls Road, May 17, 2010)

Although there is no 100-year floodplain within the AOC, there is 100-year floodplain along the unnamed tributary from Load Line 3 to Upper Cobbs Pond, approximately 1,500 ft northeast of Atlas Scrap Yard. There are biological and water quality stations in Upper and Lower Cobbs Ponds, 3,100 and 4,000 ft downstream of the AOC.

The Entire Camp Ravenna. The habitat area at Atlas Scrap Yard is approximately 73 acres, which represents 0.33% of the total area of Camp Ravenna (21,683 acres). There are five types of vegetation at Atlas Scrap Yard that are also found throughout Camp Ravenna. There are approximately 3,510 acres of FU4 vegetation type (red maple successional forest) (OHARNG 2014), representing 16.2% of the habitat at Camp Ravenna. There are approximately 2,050 acres of HU1 vegetation type – dry, early successional herbaceous field vegetation [e.g., goldenrod (*Solidago* spp.) and clasping-leaf dogbane (*Apocynum cannabinum*)] (OHARNG 2014), representing 9.5% of the habitat at Camp Ravenna. There are approximately 980 acres of FL4 vegetation type (pin oak/swamp white oak forest alliance) (OHARNG 2014), representing 4.5% of the habitat at Camp Ravenna. There are approximately 662 acres of SU2 vegetation type (red maple successional forest) (OHARNG 2014), representing 3.1% of the habitat at Camp Ravenna. There are approximately 169 acres of HL4 vegetation type (semi-permanently flooded cattail/bulrush alliance) (OHARNG 2014), representing 0.8% of the habitat at Camp Ravenna. In addition to the five types of vegetation, there are approximately 3,070 acres of jurisdictional and "planning level survey" wetlands (as defined in the INRMP) (OHARNG 2014), representing 14.2% of the habitat at Camp Ravenna. These types of resources are abundant at Camp Ravenna and are not unique to Atlas Scrap Yard.

Ecoregion. In the area surrounding Camp Ravenna, forests occupy a high percentage of the terrain. Ohio's forests cover approximately 8,000,000 acres or 30% of the state (USDA 2009). The

Erie/Ontario Drift and Lake Plain ecoregion are located in the northeastern part of Ohio and exhibit rolling to level terrain formed by lacustrine and low lime drift deposits. Lakes, wetlands, and swampy streams occur where stream networks converge or where the land is flat and clayey (USEPA 2011). The United States Forest Service has a Forest Inventory Data Online tool that was queried for the forest types in the surrounding counties in or near Camp Ravenna (USFS 2011). In 2009, approximately 11,340 acres of forest type FL4 and 265,290 acres of forest type FU4 were found throughout northwestern Ohio in Cuyahoga, Geauga, Mahoning, Portage, Stark, Summit, and Trumbull counties that surround Camp Ravenna (USFS 2011). The herbaceous field and shrubland were not individually found in this query because it is not classified as a main group of trees in the forest inventory data tool. However, herbaceous communities (HL4 and HU1) are common across the ecoregion (USDA 2011). Late-successional, cold-deciduous shrubland (SU2) across the ecoregion comprise 171,380 acres (USFS 2011). Wetlands across the ecoregion comprise 207,800 acres (USEPA 1999). Thus, the vegetation communities and wetlands at Atlas Scrap Yard are also found in the surrounding counties in the ecoregion of northeastern Ohio.

In summary, the current vegetation types of: (1) pin oak/swamp white oak; seasonally flooded forest alliance; (2) red maple, successional forest; (3) dry, early-successional, herbaceous field; (4) dry, late-successional, cold-deciduous shrubland; and (5) cattail/bulrush, semi-permanently flooded, herbaceous alliance are found in the vicinity of Atlas Scrap Yard. In addition to the five types of vegetation, wetlands are also found in the vicinity of Atlas Scrap Yard. The two forest alliance types, two herbaceous vegetation types, shrublands, and wetlands are in abundance at Camp Ravenna and the larger surrounding local ecoregion. There is no known unique resource at Atlas Scrap Yard that cannot be found in the immediate vicinity of the AOC, Camp Ravenna, and in a large part of the ecoregion of northeastern Ohio.

7.3.2.4 Evaluation of Historical Chemical Contamination and Ecological Significance

There were 25 COPECs for surface soil identified in the historical ERA as part of the Characterization of 14 AOCs: 14 inorganic chemicals (aluminum, arsenic, barium, cadmium, chromium, copper, iron, lead, manganese, mercury, nickel, selenium, silver, and zinc), one pesticide (aroclor-1260), six organic chemicals [4-methylphenol, benzo(a)pyrene, bis(2-ethylhexyl) phthalate, butylbenzyl phthalate, dibenzofuran, and naphthalene], three explosives (2-amino-4,6-DNT; 2-nitrotoluene; and 3-nitrotoluene), and one propellant (nitrocellulose) (Section 7.3.2.2).

The U.S. Army and Ohio EPA provide a checklist of important ecological places and resources to determine if such ecological resources are present in an AOC and nearby. There are wetlands at the AOC. OHARNG environmental management goals and objectives are applicable to Atlas Scrap Yard, including Goal 1 requiring management of natural resources to be compatible with the military mission, and Goal 5 requiring the U.S. Army to sustain usable training lands and native natural resources by implementing a natural resource management plan, which incorporates invasive species management, and by utilizing native species mixes for revegetation after ground disturbance activities.

Atlas Scrap Yard is made up of approximately 73 acres of herbaceous field, shrubland, forest, and bulrush/cattail wetlands. Current forest communities consist of pin oak/swamp white oak and red maple successional forest alliances. Additional wetlands, drainage ditches, natural conveyances, and low lying areas are found at the AOC. The vegetation types and wetlands at Atlas Scrap Yard are also found nearby, at Camp Ravenna, and in the ecoregion.

Because there is contamination and important or ecologically significant resources at Atlas Scrap Yard (i.e., Wetlands 1, 6, 8, and 9), this ERA will continue to a Level II Screening Level ERA.

7.3.3 Level II: Screening Level Ecological Risk Assessment

The Level II method follows the guidance documents listed in Section 7.3.1 and identifies evaluation procedures used for problem formulation and ecological effects evaluation to determine AOC-related COPECs. This work includes defining habitats/environmental setting, suspected contaminants, possible pathways, and mechanisms for ecotoxicity and contaminant transport. Level II also includes establishing screening values.

In addition, technical and refinement factors can be used to assess outcomes of the above procedures. The factors include using mean exposure concentrations and discussing approved ESVs, wetland quality at the AOC, and other topics that evaluate and refine COPECs from the Level II Screening ERA. This type of assessment is called Step 3A in the ERA process (USEPA 1997).

7.3.3.1 Generic Ecological Conceptual Exposure Model

The Conceptual Site Exposure Model (CSEM) identifies the interconnections of contaminant sources and transport mechanisms for contaminant migration through the environment to the receptors. The CSEM provides an understanding of the relationships of all sources, release and transport pathways, potential exposure media, and receptors. The CSEM includes:

- **Source Media –** Based on historical AOC information, operations associated with various former buildings at Atlas Scrap Yard are the contaminant source. The operations contributed chemicals to the surrounding soil and perhaps to the nearby wetlands that contain sediment and surface water.
- **Transport Mechanisms –** Contaminants in soil can migrate via erosion and leaching. Migration to temporary sediment and temporary surface water via erosion is controlled by the amount of precipitation, type of ground cover, and topography of the AOC. Little erosion is expected to occur at the AOC because the land is relatively flat and has extensive vegetative cover. This extensive vegetative cover includes herbaceous fields, shrublands, forests, and wetlands. Much of the precipitation landing in this area is expected to leach to the soil, and some precipitation would be absorbed into the wetlands.
- **Exposure Media –** Exposure media are media where contaminants are available for exposure to ecological receptors. Potential exposure media at Atlas Scrap Yard are soil, vegetation, and animals.

- **Exposure Pathways –** A main exposure pathway is ingestion of contaminated food. Other pathways may include ingestion of soil and dermal contact by receptors with soil.
- **Ecological Receptors –** A variety of ecological receptors, such as terrestrial birds and mammals, are present in the area. Receptors associated with various published toxicological endpoints (e.g., reproduction, physiology) are assumed to represent these various plants and animals.

7.3.3.2 Habitats and Species (Including Generic Receptors)

Habitats and species were defined in the Level I ERA (Section 7.3.2). For example, five types of habitats were described. Habitats, species, and other resources were analyzed, and it was determined that important or significant ecological resources are present at Atlas Scrap Yard and in its vicinity. Wetlands are present at the AOC. Contamination is present; therefore, a Level II analysis is needed. Level II assumes ecological receptors are sensitive to various chemicals based on a variety of toxicological data from field-observed effects and laboratory tests.

7.3.3.3 Procedure to Identify COPECs

The screening level approach to evaluate sample results from the PBA08 RI followed a similar approach used in the historical ERA. Section 5.0 details chemical concentration data. The PBA08 RI evaluation uses ISM soil data collected during the PBA08 RI and ISM soil data used in the historical ERA. The PBA08 RI included collecting ISM surface soil (0–1 ft bgs) samples at locations different from the historical soil sample locations, and some samples were co-located with previous samples. In addition, evaluations of individual ISM samples were conducted for Wetlands 1, 6, 8, and 9 using ISM soil data most representative of the wetland or the area between the wetland and potential sources to these wetlands. Because the wetland soil is most often dry, but occasionally wet, sample results were also compared with sediment site-wide background concentrations and the Ohio Sediment Reference Values (SRVs). While 19 discrete surface soil samples were collected during the PBA08 RI, these samples were only used in the nature and extent evaluations. However, the uncertainty section includes a comparison between the 19 discrete surface soil sample results and ISM surface soil results used in the ERA (ISM soil data collected during the PBA08 RI and ISM soil data used in the historical ERA). No sediment or surface water samples were collected within Atlas Scrap Yard during the PBA08 RI. This ERA uses updated ESVs that follow the revised *Ecological Risk Assessment Guidance* (Ohio EPA 2008), as provided in Appendix Table H-4.

For the entire AOC, the MDC of each chemical is compared to its respective facility-wide background concentration. Chemicals are not considered site-related if the MDC is below the background concentration. For all chemicals detected above background concentrations, the MDC is compared to the chemical-specific ESV. In addition to the ESV comparison, it was determined if the chemical is a PBT compound. Chemicals are retained as COPECs if they exceed background concentrations and the ESV, if the chemical exceeds background concentrations and had no toxicity information (i.e., ESV), or if the chemical is considered a PBT compound. Ratios of MDC to ESV are used to determine the integrated COPECs that result from the combined current and historical

datasets. A ratio greater than one suggests a possible environmental consequence; any chemicals with ratios greater than one are identified as integrated COPECs. For individual wetlands, the screening process is the same, except concerning background, where the MDC is compared against the surface soil and sediment background concentrations as well as the sediment reference value (SRV). The chemical is not considered site-related as long as the MDC is below at least one of the three values.

Maximum Detected Concentrations – The MDCs were compared to background concentrations and ESVs for each detected chemical. These comparisons are provided in Appendix Tables H-5 for surface soil of the entire AOC, H-8 for surface soil of Wetland 1, H-9 and H-10 for surface soil of Wetland 6, H-11 for surface soil of Wetland 8, and H-12 for surface soil of Wetland 9.

Ecological Screening Values – Although the historical ERA used ESVs from the 2003 version of the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2003), this ERA uses updated ESVs from the 2008 version of this guidance document. The hierarchy for soil is Ecological SSLs (EcoSSLs), PRGs, and environmental screening levels. Appendix Table H-4 provides for values and sources for ESVs.

7.3.3.4 Integrated COPECs for Soil (0-1 ft bgs)

Five EUs were evaluated for ecological receptors at Atlas Scrap Yard. First, all ISM samples across the entire Atlas Scrap Yard were evaluated together. Then, individual ISM samples collected at or proximate to Wetlands 1, 6, 8, and 9 were evaluated. A summary of the integrated COPECs identified in soil at the five soil EUs follows.

Integrated COPECs for Surface Soil (0-1 ft) at the Entire Atlas Scrap Yard. During the PBA08 RI, 60 chemicals were detected in surface soil. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. Sixteen detected inorganic chemicals and 37 organic chemicals were determined to be SRCs because they either exceeded background concentrations or did not have an associated background concentration for comparison. Of the 53 SRCs, 12 inorganic chemicals (aluminum, arsenic, cadmium, chromium, cobalt, copper, lead, manganese, mercury, selenium, silver, and zinc) and six organic chemicals [2,6-DNT, benz(a)anthracene, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, chrysene, and naphthalene] exceeded their ESVs and are identified as integrated COPECs (Table 7-18). Butylbenzylphthalate has a ratio of 1.00 and will not be included as an integrated COPEC. In addition, nine organic chemicals (2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; 4-amino-2,6-DNT; HMX; nitrocellulose; tetryl; carbazole; and dibenzofuran) were selected as COPECs because they do not have an ESV. Besides exceeding the ESV, mercury is also a PBT compound. While PCB-1260 did not exceed the ESV, it is identified as an integrated COPEC because it is a PBT compound. The calculated ratio of MDC to ESV is shown in Table 7-18 for each integrated COPEC. Appendix Table H-5 presents the details of the ESV comparisons for surface soil.

Most of the 28 surface soil COPECs reported in the historical ERA (Table 7-15) are also identified in the current ERA. The Characterization of 14 AOCs identified four COPECs (barium, iron, nickel, and

4-methylphenol) that are not integrated COPECs. Barium, nickel, and 4-methylphenol were below the new ESVs (Ohio EPA 2008, Appendix Table H-4) and iron was considered an essential nutrient in the integrated COPEC screen. Eight new COPECs [cobalt; 2,6-DNT; 4-amino-2,6-DNT; HMX; tetryl; benz(a)anthracene; carbazole; and chrysene] are identified in the PBA08 RI data. The addition of cobalt is due to updated, more conservative ESVs. The addition of 2,6-DNT; 4-amino-2,6-DNT; HMX; tetryl; and carbazole is due to lack of screening values. Based on the presence of integrated COPECs, this ERA predicts a potential for ecological risk in surface soil.

Integrated COPECs for Surface Soil (0-1 ft) at Wetland 1. The majority of Wetland 1 is covered by ISM sample ASYss-098M (Figure 4-5), so this sample was chosen to evaluate Wetland 1 (Figure 7-1). Thirty-nine chemicals were detected in surface soil at ASYss-098M. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. All 16 detected organic chemicals were determined to be SRCs because they did not have an associated background concentration for comparison; all detected inorganic chemicals were below background concentrations or SRVs. None of the 16 organic SRCs exceeded their ESVs or were identified as PBT compounds. Although mercury was detected below its SRV, it is included as a PBT compound per the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and was identified as an integrated COPEC for Wetland 1. The calculated ratio of the concentration of mercury at Wetland 1 to its ESV is shown in Table 7-19. Appendix Table H-8 presents the details of the ESV comparisons for surface soil. Based on the presence of the integrated COPEC mercury, this ERA predicts a potential for ecological risk in surface soil at Wetland 1.

Integrated COPECs for Surface Soil (0-1 ft) at Wetland 6. ISM sample ASYss-086M covers the entirety of the portion of Wetland 6 that is located inside the habitat boundary of Atlas Scrap Yard, and ISM sample ASYss-082M is within a few feet of Wetland 6 (Figure 4-4). These samples were evaluated individually to assess Wetland 6 (Figure 7-4). Thirty-nine chemicals were detected in surface soil at ASYss-086M. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. One detected inorganic chemical (beryllium) exceeded background concentrations and its SRV, and all 16 detected organic chemicals did not have associated background concentrations for comparison; accordingly, these 17 detected chemicals were considered SRCs. None of the 16 organic SRCs or beryllium exceeded their ESVs or were identified as PBT compounds. Although mercury was detected below its sediment background concentration and SRV, it is included as a PBT compound per the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and was identified as an integrated COPEC for Wetland 6. The calculated ratio of the concentration of mercury at ISM sample ASYss-086M at Wetland 6 to its ESV is shown in Table 7-19. Appendix Table H-10 presents the details of the ESV comparisons for surface soil. Based on the presence of the integrated COPEC mercury, this ERA predicts a potential for ecological risk in surface soil at Wetland 6.

Thirty-nine chemicals were detected in surface soil at ASYss-082M. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. Four detected inorganic chemicals exceeded background concentrations and SRVs, and all 16 detected organic chemicals did not have associated background concentrations

for comparison; accordingly, these 20 detected chemicals were considered SRCs. In addition, although mercury was detected below its sediment background concentration and SRV, it is included as a PBT compound per the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and was identified as an integrated COPEC for Wetland 6. Two inorganic chemicals (manganese and selenium) and one organic chemical (naphthalene) exceeded their ESVs and are identified as additional integrated COPECs for ISM sample ASYss-082M at Wetland 6. The calculated ratio of detected concentrations to ESVs is shown in Table 7-19 for each integrated COPEC. Appendix Table H-9 presents the details of the ESV comparisons for surface soil. Based on the presence of the integrated COPECs manganese, mercury, selenium, and naphthalene, this ERA predicts a potential for ecological risk in surface soil at Wetland 6.

Integrated COPECs for Surface Soil (0-1 ft) at Wetland 8. The majority of the portion of Wetland 8 that is located inside the habitat boundary of Atlas Scrap Yard is covered by ISM sample ASYss-097M (Figure 4-5), so this sample was chosen to evaluate Wetland 8 (Figure 7-4). Forty-six chemicals were detected in surface soil at ASYss-097M. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. All 23 detected organic chemicals were determined to be SRCs because they did not have an associated background concentration for comparison; all detected inorganic chemicals were below background concentrations or sediment reference values (SRVs). Although mercury was detected below its SRV, it is included as a PBT compound per the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and was identified as an integrated COPEC for Wetland 8. No organic SRCs exceeded their ESVs; however, three organic chemicals (nitrocellulose, carbazole, and dibenzofuran) lack ESVs and are identified as additional integrated COPECs for ISM sample ASYss-097M at Wetland 8. The calculated ratio of the detected concentration to the ESV is shown in Table 7-19 for each integrated COPEC. Appendix Table H-11 presents the details of the ESV comparisons for surface soil. Based on the presence of the integrated COPECs mercury, nitrocellulose, carbazole, and dibenzofuran, this ERA predicts a potential for ecological risk in surface soil at Wetland 8.

Integrated COPECs for Surface Soil (0-1 ft) at Wetland 9. The small portion of Wetland 9 that is located inside the habitat boundary of Atlas Scrap Yard is covered by ISM sample ASYss-092M (Figure 4-5), so this sample was chosen to evaluate Wetland 9. Thirty-seven chemicals were detected in surface soil at ASYss-092M. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. All 14 detected organic chemicals were determined to be SRCs because they did not have an associated background concentration for comparison; all detected inorganic chemicals were below background concentrations or SRVs. Although mercury was detected below its SRV, it is included as a PBT compound per the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) and was identified as an integrated COPEC for Wetland 9. No organic SRCs exceeded their ESVs; thus mercury was the only integrated COPEC identified for Wetland 9. The calculated ratio of the detected concentration of mercury in ISM sample ASYss-092 to the ESV is shown in Table 7-19 for the integrated COPEC mercury. Appendix Table H-12 presents the details of the ESV comparisons for surface soil. Based on the presence of the integrated COPEC, mercury, this ERA predicts a potential for ecological risk in surface soil at Wetland 9.

7.3.3.5 Integrated COPECs for Sediment

No historical or PBA08 RI sediment samples were collected at the AOC because this medium was not present.

7.3.3.6 Integrated COPECs for Surface Water

No historical or PBA08 RI surface water samples were collected at the AOC because this medium was not present.

7.3.3.7 Step 3A: Refinement of Integrated COPECs

Step 3A refines the list of integrated COPECs to determine if: (1) there are final COPECs requiring further evaluation in Level III or remediation to protect ecological receptors; or (2) integrated COPECs can be eliminated from further consideration. This section applies and evaluates refinement factors to the integrated COPECs for the AOC. This evaluation is an important part of Level II and is adapted from USEPA Step 3A, outlined in the *Ecological Risk Assessment Guidance for Superfund: Process for Designing and Conducting Ecological Risk Assessments* (USEPA 1997) and *Risk Assessment Handbook Volume II: Environmental Evaluation* (USACE 2010b). The purpose of Step 3A is stated as follows by the U.S. Army (BTAG 2005):

> *"The results of Step 3A will be used to determine if threats to ecological receptors are negligible and an appropriate risk management decision may be made to end the ERA process, or potential threats are still indicated and a baseline ERA should be initiated."*

The evaluation and refinement factors used in Step 3A for the entire Atlas Scrap Yard include:

- Comparing the average (i.e., mean) concentration to ESV;
- Comparing the mean concentration to background concentration;
- Comparing the background concentration to ESV;
- Evaluating the frequency of chemical occurrence relative to ESV;
- Evaluating the magnitude of ESV exceedance (ratio of ESV to chemical concentrations);
- Discussing Ohio EPA approved and preferred ESVs;
- Categorizing wetland quality inside the AOC;
- Evaluating geographical relationship of on-site wetlands to AOC exceedance area;
- Providing information about on-site migration of chemicals to on-site wetlands; and
- Evaluating off-site migration of chemicals at biological/water quality stations.

There are 28 integrated COPECs identified in soil at the entire Atlas Scrap Yard. Aluminum; arsenic; cadmium; chromium; cobalt; copper; lead; manganese; mercury; selenium; silver; zinc; 2,6-DNT; benz(a)anthracene; benzo(a)pyrene; bis(2-ethylhexyl)phthalate; chrysene; and naphthalene are the

18 integrated COPECs that exceeded their background concentrations and ESVs. Nine chemicals (2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; 4-amino-2,6-DNT; HMX; nitrocellulose; tetryl; carbazole; and dibenzofuran) are integrated COPECs because they do not have an ESV. Mercury and PCB-1260 are also PBT compounds.

Chemicals with no ESVs are discussed later in Step 3A and in the uncertainty section (Section 7.3.3.9). PBT compounds are discussed later in Step 3A. All integrated COPECs that have an MDC to ESV ratio greater than one are evaluated based on a series of evaluation or refinement factors. The first four evaluation and refinement factors are organized to compare key quantitative information and are listed below.

- Compare average or mean concentration to ESV;
- Compare mean concentration to background concentration;
- Compare background concentration to ESV; and
- Evaluate frequency of chemical occurrence relative to ESV.

Multiple evaluation factors can be used to define whether an integrated COPEC should be retained or eliminated from further consideration. There are two types of comparisons and associated decisions in the first steps of the refinement process (Table 7-20).

Comparing background concentrations to ESVs is also an important consideration in this part of the evaluation. Additionally, frequency of detection is provided. The evaluations are presented by type of decision on a COPEC-by-COPEC basis (Table 7-21). These evaluations are followed by applying additional evaluation and refinement factors, when necessary.

Comparison of Mean Concentration to ESV – Seven integrated COPECs [arsenic, chromium, cobalt, copper, silver, benz(a)anthracene, and chrysene] in soil are eliminated in this step because the mean concentration is smaller than the ESV (Appendix Table H-6). Each eliminated integrated COPEC is discussed relative to the mean concentration being smaller than the ESV and the related evaluation and refinement factors. Table 7-21 shows the relevant data and various comparisons.

***Arsenic*.** Arsenic was detected in all 65 ISM samples analyzed for inorganic chemicals at Atlas Scrap Yard. Only two samples had detections above the background concentration and the ESV (Table 7-21). Although the MDC for arsenic in surface soil exceeds the background concentration and ESV, the mean concentration is less than both the ESV and background concentrations. Therefore, arsenic is eliminated from further consideration and will not be a final COPEC.

Chromium. Chromium was detected in all 65 ISM samples analyzed for inorganic chemicals at Atlas Scrap Yard. Forty-six samples had detections above the background concentration, and only 11 samples had chromium concentrations exceeding the ESV (Table 7-21). Although the MDC for chromium in surface soil exceeds the background concentration and ESV, the mean concentration is less than the ESV. Therefore, chromium is eliminated from further consideration and will not be a final COPEC.

Cobalt. Cobalt was detected in all 65 ISM samples analyzed for inorganic chemicals at Atlas Scrap Yard. Four samples had detections above the background concentration, but only two of these samples had cobalt concentrations exceeding the ESV (Table 7-21). Although the MDC for cobalt in surface soil exceeds the background concentration and ESV, the mean concentration is less than the ESV and close to background concentration. Therefore, cobalt is eliminated from further consideration and will not be a final COPEC.

Copper. Copper was detected in all 65 ISM samples analyzed for inorganic chemicals at Atlas Scrap Yard. Only fourteen samples had detections above the background concentration, and only six samples had copper concentrations exceeding the ESV (Table 7-21). Although the MDC for copper in surface soil exceeds the background concentration and ESV, the mean concentration is less than the ESV. Therefore, copper is eliminated from further consideration and will not be a final COPEC.

Silver. Silver was detected in 39 of 65 ISM samples analyzed for inorganic chemicals at Atlas Scrap Yard. All 39 samples had detections above the background concentration, but only two samples had silver concentrations exceeding the ESV (Table 7-21). Although the MDC for silver in surface soil exceeds the background concentration and ESV, the mean concentration is less than the ESV. Therefore, silver is eliminated from further consideration and will not be a final COPEC.

Benz(a)anthracene. Benz(a)anthracene was detected in all 38 ISM samples. There is no background concentration for comparison, but only six samples had benz(a)anthracene concentrations exceeding the ESV (Table 7-21). Although the MDC for benz(a)anthracene in surface soil exceeds the ESV, the mean concentration is less than the ESV. Therefore, benz(a)anthracene is eliminated from further consideration and will not be a final COPEC.

Chrysene. Chrysene was detected in all 38 ISM samples. There was no background concentration for comparison, but only eight samples had chrysene concentrations exceeding the ESV (Table 7-21. Although the MDC for chrysene in surface soil exceeds the ESV, the mean concentration is less than the ESV. Therefore, chrysene is eliminated from further consideration and will not be a final COPEC.

Of the 18 integrated soil COPECs with MDCs exceeding the ESV, arsenic, chromium, cobalt, copper, silver, benz(a)anthracene, and chrysene were eliminated from further consideration because the mean concentration is smaller than the ESV. Eleven remaining integrated COPECs with MDCs greater than the ESV [aluminum; cadmium; lead; manganese; mercury; selenium; zinc; 2,6-DNT; benzo(a)pyrene; bis(2-ethylhexyl)phthalate; and naphthalene] in surface soil have mean concentrations larger than the ESV.

Comparison of Mean Concentration Above ESV to Background Concentration – Three integrated COPECs in surface soil (aluminum, manganese, and selenium) are eliminated in this step because the mean concentrations are larger than the ESVs but smaller than the background concentrations. Aluminum, manganese, and selenium are discussed relative to the various evaluation and refinement factors.

Aluminum. Aluminum in surface soil has a mean concentration less than the background concentration (Table 7-21). The background concentration is more than 350 times greater than the ESV, so the ESV can be considered conservative. Although aluminum was detected in all 65 ISM samples at concentrations above the ESV, only seven samples had detections exceeding the background concentration. Having only seven samples exceed the background concentration suggests the concentration of aluminum in surface soil is not likely a concern. Additionally, aluminum is not likely a concern because the soil pH is too high to dissociate the chemical. A typical soil pH is 6.0-7.0 at one of the nearby load lines (USACE 2004). Regarding aluminum chemistry and ecological risk in soil, the USEPA states, "aluminum is identified as a COPC only for soil with a pH less than 5.5" (USEPA 2003a). Therefore, because the mean concentration is less than the background concentration, the ESV is rather conservative, and the soil pH at Camp Ravenna is higher than the USEPA dissociation limit, aluminum is eliminated from further consideration and will not be a final COPEC.

Manganese. Manganese in surface soil has a mean concentration less than the background concentration (Table 7-21). The background concentration is more than 6.5 times greater than the ESV, so the ESV can be considered conservative. Although manganese was detected in 61 of 65 ISM samples at concentrations above the ESV, only 11 samples had detections exceeding the background concentration. Having only 11 samples exceed the background concentration suggests the concentration of manganese in surface soil is not likely a concern. Therefore, because the mean concentration is less than the background concentration and the ESV is rather conservative, manganese is eliminated from further consideration and will not be a final COPEC.

Selenium. Selenium in surface soil has a mean concentration less than the background concentration (Table 7-21). The background concentration is more than two times greater than the ESV, so the ESV can be considered conservative. Although selenium was detected in 56 of 65 ISM samples at concentrations above the ESV, only nine samples had detections exceeding the background concentration. Having only nine samples exceed the background concentration suggests the concentration of selenium in surface soil is not likely a concern. Therefore, because the mean concentration is less than the background concentration and the ESV is rather conservative, selenium is eliminated from further consideration and will not be a final COPEC.

Continued Evaluations – The remaining eight integrated COPECs [cadmium, lead, mercury, zinc, 2,6-DNT, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, and naphthalene] in soil have mean concentrations greater than the ESV and the background concentration. Each remaining integrated COPEC is presented below and is discussed relative to the first four evaluation and refinement factors and related evaluation and refinement factors.

Cadmium. Cadmium was detected in 58 of 65 ISM samples. All 58 detections were above the background concentration, but only 14 samples had cadmium concentrations exceeding the ESV (Table 7-21). The MDC and mean concentration for cadmium in surface soil exceeds the ESV. Therefore, cadmium requires further evaluation as a COPEC.

Lead. Lead was detected in all 65 ISM samples. It has a mean concentration greater than the background concentration and ESV. It was detected above the background concentration in only 24 ISM samples, but it was detected at concentrations above the ESV in all 65 samples (Table 7-21). This is because the ESV is lower than the background concentration, which indicates the ESV for lead may be conservative. Although the ESV may be conservative, the mean concentration for lead in surface soil exceeds both the background concentration and ESV. Lead requires further evaluation as a COPEC.

Mercury. Mercury was detected in 59 of 65 ISM samples. It has a mean concentration greater than the background concentration and ESV. Mercury was detected above the background concentration in 48 ISM samples, but it was detected at concentrations above the ESV in all 59 samples (Table 7-21). This is because the background concentration is 70 times greater than the ESV, suggesting the ESV may be very conservative. Although mercury has a very conservative ESV, it is a PBT compound, and the mean concentration exceeds the background concentration and ESV. Mercury requires further evaluation as a COPEC.

Zinc. Zinc was detected in all 65 ISM samples. It has a mean concentration greater than the background concentration and ESV. Zinc was detected above the background concentration in only 37 of 65 ISM samples, but it was detected at concentrations above the ESV in 55 samples (Table 7-21). This is because the ESV is lower than the background concentration, which indicates the ESV for zinc may be conservative. Because the mean concentration in surface soil exceeds the background concentration and the ESV, zinc requires further evaluation as a COPEC.

2,6-Dinitrotoluene. 2,6-DNT was detected in only 1 of 65 ISM samples. There was no background concentration for comparison, but the only detected concentration was greater than the ESV (Table 7-21). Because 2,6-DNT was detected at only one location throughout the entire AOC, it is not pervasive. Therefore, 2,6-DNT is eliminated as a COPEC because of the very low frequency of detection.

Benzo(a)pyrene. Benzo(a)pyrene was detected in all 38 ISM samples. There was no background concentration for comparison, but 13 samples had concentrations exceeding the ESV (Table 7-21). The mean concentration for benzo(a)pyrene in surface soil exceeds the ESV. Therefore, benzo(a)pyrene requires further evaluation as a COPEC.

Bis(2-ethylhexyl)phthalate. Bis(2-ethylhexyl)phthalate was detected in 3 of 7 ISM samples. There was no background concentration for comparison, but only one sample had a concentration that exceeded the ESV (Table 7-21). The mean concentration of bis(2-ethylhexyl)phthalate in surface soil slightly exceeds the ESV. Therefore, bis(2-ethylhexyl)phthalate requires further evaluation as a COPEC.

Naphthalene. Naphthalene was detected in 37 of 38 ISM samples. There was no background concentration for comparison, but only 17 samples had naphthalene concentrations exceeding the

ESV (Table 7-21). The MDC and mean concentration for naphthalene in surface soil exceeds the ESV. Therefore, naphthalene requires further evaluation as a COPEC.

Additional Aspects of Continued Evaluations – The second refinement factor comparing the mean concentration to background concentration evaluates how much higher the mean soil concentration is compared to the background concentration. Three COPECs (lead, mercury, and zinc) that require further evaluation have mean concentrations higher than their background concentrations. If the degree of difference between the mean concentration and the background concentration is small, the integrated COPEC may not be considered a final COPEC. Table 7-22 shows that while the mean concentration exceeds the background concentration, the exceedance is small in three cases (lead, mercury, and zinc) where background concentrations are available. For example, the mean concentration for lead is 57 mg/kg, while the background concentration is 26.1 mg/kg (i.e., ratio of 2.18).

Additional Technical and Refinement Factors – Additional evaluation and refinement factors include:

- Magnitude of ESV exceedance (ratio of ESV to chemical concentrations); and
- Discussion of Ohio EPA approved and preferred ESVs.

Magnitude of ESV Exceedance. As discussed previously, a ratio greater than one suggests a possible environmental consequence. However, there is not always a linear relationship between increasing media concentrations and increasing toxicity. Thus, COPECs with greater mean concentration to ESV ratios are not necessarily more toxic than those COPECs with lower mean concentration to ESV ratios. However, there is typically greater confidence that minor exceedances are of less concern because the screening values are typically conservative. As a result, the magnitude of exceedance was used as another refinement factor. Accordingly, while the mean concentration to ESV ratios for cadmium (1.42), lead (5.18), mercury (150.20), zinc (2.52), benzo(a)pyrene (2.04), bis(2-ethylhexyl)phthalate (1.04), and naphthalene (1.84) indicate a possibility of risk, five of the ratios are relatively small (Appendix Table H-6).

The small ratios for cadmium, zinc, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, and naphthalene indicate the potential for toxicity is relatively low, and this likely supports elimination of the integrated COPECs.

The *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) states:

> *"If only minor exceedances are detected and other evidence can substantiate, a claim may be made that some or all of the site-associated soils have not been impacted and no additional ecological investigation of the soils is warranted."*

Comparison of Ohio EPA Approved and Preferred ESVs – The *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) gives specific guidance on selecting media screening values (ESVs) for Level II evaluation. For soil, three possible sources of ESV values are listed in order of preference: (1) USEPA EcoSSLs; (2) *Preliminary Remediation Goals for Ecological Endpoints* (DOE 1997); and (3) *Region 5 Ecological Screening Levels* (USEPA 2003b). However, it is important to note the preferred source (EcoSSLs) can have up to four values per chemical—one for each receptor type (plants, soil invertebrates, birds, and mammals). Because Ohio EPA does not provide guidance on which value to select of these four, the most conservative (lowest) value was chosen for this ERA. It is possible that the chosen ESV is too conservative. Alternative ESVs are presented below for four of the remaining seven integrated COPECs.

The cadmium ESV used in this ERA is 0.36 mg/kg. This concentration is considered the Ohio EPA approved and preferred ESV for cadmium in accordance with the *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008); the ESV originated from the *Ecological Soil Screening Levels for Cadmium* (USEPA 2005a). The USEPA EcoSSL guidance document is Ohio EPA's preferred source of ESVs (Appendix Table H-4). The cadmium ESV used in this ERA is the most conservative ESV of the USEPA EcoSSLs. Other possible EcoSSLs for cadmium include 0.77 mg/kg, 32 mg/kg, and 140 mg/kg (USEPA 2005a). The ESV of 0.36 mg/kg is more than 10 times lower than the ESV (4.0 mg/kg) from *Preliminary Remediation Goals for Ecological Endpoints* (DOE 1997), considered the next source of ESVs preferred by Ohio EPA (Appendix Table H-4), which is almost 10 times the mean concentration (0.511 mg/kg) for cadmium. This information indicates that the Ohio EPA approved and preferred ESV for cadmium is conservative; thus, the selection of cadmium as a COPEC is conservative.

The Ohio EPA approved and preferred lead ESV used in this ERA is 11 mg/kg. This ESV is from the USEPA EcoSSLs (Appendix Table H-4). The lead ESV used in this ERA is the most conservative ESV of the USEPA EcoSSLs. Other EcoSSLs for lead include 56 mg/kg, 120 mg/kg, and 1,700 mg/kg (USEPA 2005b). The ESV of 11 mg/kg is about four times lower than the ESV (40.5 mg/kg) from the next source of ESVs preferred by Ohio EPA (Appendix Table H-4) (DOE 1997). The preferred ESV used for lead is also lower than the background concentration of 26.1 mg/kg (Appendix Table H-6), while all of the other EcoSSLs and the alternate ESV are above the background concentration. This information indicates the Ohio EPA approved and preferred ESV for lead, and thus the selection of lead as a COPEC, is very conservative.

The Ohio EPA approved and preferred mercury ESV used in this ERA is 0.00051 mg/kg (Appendix Table H-4). The ESV is lower than other ESVs for mercury (0.1 mg/kg), the ESV for methylmercury (0.0016 mg/kg) (USEPA 2000, USEPA 2001, USEPA 2003b) (Appendix Table H-4), and the background concentration (0.036 mg/kg). The *Preliminary Remediation Goals for Ecological Endpoints* labels this form of mercury as an "inorganic chemical" and notes that the ESV for mercury is "so low that it may often be within background soil concentrations" (DOE 1997). Although mercury can bioaccumulate in food chains as a PBT compound, the Ohio EPA approved and preferred ESV is very low; therefore, the selection of mercury as a COPEC is very conservative.

The Ohio EPA approved and preferred zinc ESV used in this ERA is 46 mg/kg. This value is from the USEPA EcoSSLs (Appendix Table H-4). The zinc ESV used in this ERA is the most conservative ESV of the USEPA EcoSSLs. Other EcoSSLs for zinc include 79 mg/kg, 120 mg/kg, and 160 mg/kg (USEPA 2007b). The ESV of 46 mg/kg is about five times greater than the ESV (8.5 mg/kg) from the next source of ESVs preferred by Ohio EPA (Appendix Table H-4) (DOE 1997). The preferred ESV used for zinc is also lower than the background concentration of 61.8 mg/kg (Appendix Table H-6), while all of the other EcoSSLs are above the background concentration. These factors indicate the Ohio EPA approved and preferred ESV for zinc is somewhat conservative; thus, the selection of zinc as a COPEC is somewhat conservative.

The above information about alternative ESVs shows there are less conservative ESVs that could be chosen for the Level II work. Table 7-23 shows the ratio of ESV to mean concentration for the preferred ESV and an alternative ESV. This alternative ESV is the ESV with the closest concentration to the preferred ESV that is above the background concentration. For the six remaining integrated COPECs, using the alternative ESV would decrease the ratios for cadmium and mercury to less than one. Thus, if the alternative ESVs were used, cadmium and mercury would be eliminated from further consideration and would not be final COPECs. Using the alternative ESV also would also decrease the ratios for lead and zinc to ratios between one and two.

Based on the three previous refinement factors, the seven integrated COPECs remaining in Table 7-23 all are dismissed as final COPECs. More specifically, mean concentrations are only slightly higher than background concentrations in lead, mercury, and zinc. Mean concentration-to-ESV ratios of exceedance are near one in cadmium, zinc, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, and naphthalene. Using alternate ESVs results in ratios below one for cadmium and mercury and slightly just above one for lead and zinc.

Wetland Quality, Geographical Information, and On-site Migration of Chemicals – The following evaluation and refinement factors are concerned with risk to wetlands:

- Category of wetland quality inside the AOC;
- Geographical relationship of on-site wetlands to AOC exceedance area; and
- Information about on-site migration of chemicals to on-site wetlands.

If the wetland quality is low, it is typically distant from the AOC exceedance area (i.e., high concentration area) or on-site migration is unlikely, increasing the likelihood that the remaining integrated COPECs will not be of ecological concern and do not need to be evaluated as final COPECs. At this point in the evaluation, all integrated COPECs have been eliminated as final COPECs. Nonetheless, discussing these three evaluation and refinement factors remains pertinent, as there is some uncertainty associated with eliminating all integrated COPECs as final COPECs. Wetland quality, geographical relationship to the eliminated integrated COPECs, and potential for migration to wetlands may reduce the uncertainty associated with eliminating the integrated COPECs.

There are nine wetlands partially or completely inside Atlas Scrap Yard. They range from 0.03-3.35 acres, with 0.03-1.42 acres inside the AOC boundary. Five of the nine wetlands are Category 2, while four of the wetlands are Category 1 (Table 7-16). Category 2 indicates moderate wetland quality, with some degradation of wetland functions. Category 1 indicates low wetland quality, with degradation of wetland functions. Camp Ravenna contains about 1,990 acres of wetlands, and the 3.89 acres of wetlands inside the habitat boundary at Atlas Scrap Yard represent 0.2% of the total wetlands of Camp Ravenna (OHARNG 2008). The moderate to low quality and availability of many more wetland acres at Camp Ravenna lowers the importance of the wetlands at Atlas Scrap Yard.

The wetlands are scattered throughout the AOC (Figure 7-4). Given the widespread exceedances of ESVs by contaminants (particularly inorganic chemicals) detected in the ISM surface soil sampling and the proximity of the wetlands to areas with integrated COPECs, it is possible contaminants have migrated to the wetlands from surface water runoff during storm events. However, there is limited on-site stormwater migration given the relatively flat terrain and vegetative cover inside the AOC. There is also limited off-site migration (i.e., south to the watershed, east to the ditch along and culvert under Paris-Windham Road, and east into the ditch system through Load Line 12 to Upper and Lower Cobbs Ponds). Furthermore, the subsequent evaluation of specific Wetlands 1, 6, 8, and 9 indicates that significant releases from source areas to these wetlands have not occurred.

In summary, the wetlands at Atlas Scrap Yard are of low or moderate quality. These wetlands are surrounded by areas with integrated COPECs, so COPECs may migrate to on-site wetlands. Limited amounts of off-site migration may occur during storm events through drainage ditches and conveyances. Although the geographical relationship of the on-site wetlands to exceedances and potential for migration does not significantly reduce the uncertainty associated with eliminating integrated COPECs as part of the Step 3A refinement, the limited capability of the wetlands to serve as a breeding habitat for the closest recorded state-listed or federally listed species [four-toed salamander (*Hemidactylium scutatum*)] reduces the uncertainty. More specifically, water needs to persist for at least 32-68 days for a wetland or vernal pool to serve as a breeding habitat for salamanders. The salamander embryos are entirely aquatic, and 32-68 days is the duration of the embryo development (Petranka 1998). Although salamanders may be present and use the surrounding habitat and forest during non-breeding periods, with the exception of Wetland 1, the wetlands at Atlas Scrap Yard would not be sufficient for salamander breeding. Wetland 1 may be flooded frequently enough to serve as breeding habitat for salamanders, but the inorganic chemicals concentrations in the ISM grid where this wetland is located are much lower than the rest of the AOC. In fact, the only

integrated COPEC identified in Wetland 1 was mercury and it is below background (but was identified as an integrated COPEC because it is a PBT compound).

Evaluation of Biological and Water Quality Sampling Stations – The final evaluation and refinement factor is:

- Evaluate off-site migration of chemicals at biological/water quality stations.

Various biological measurements of macroinvertebrates and fish, as well as chemical and physical measurements of surface water and sediment, were taken and assessed for evidence of upgradient and downgradient contamination. These studies were published in the *Facility-Wide Biological and Water Quality Study* (USACE 2005a). Monitoring stations are positioned in streams and ponds downgradient of several AOCs. For Atlas Scrap Yard, the nearest stream sampling station is 2,100 ft southwest, and the nearest pond sampling station is 2,000 ft southwest. These monitoring stations are upgradient of the AOC. The nearest downgradient stream sampling station is 5,000 ft northeast and the nearest downgradient pond sampling station is 3,100 ft northeast of the AOC (Table 7-17). While runoff from Atlas Scrap Yard enters Load Line 12, the monitoring results from the downgradient stream and pond sampling stations are discussed in more detail in the *Phase III Remedial Investigation Report for Wet Sediment and Surface Water at RVAAP-12 Load Line 12* (USACE 2012b) and *Phase III Remedial Investigation Report and Feasibility Study for Soil, Sediment, and Surface Water at RVAAP-29 Upper and Lower Cobbs Ponds* (USACE 2012a), because these two AOCs are closer to the monitoring stations. Therefore, this particular factor was not applied.

Evaluation of PBT Compounds and COPECs Without ESVs – As discussed in Level II, there are two chemicals that are PBT compounds and nine chemicals that are integrated COPECs because they did not have ESVs in surface soil. These chemicals are briefly evaluated below.

PBT Compounds. The *Guidance for Conducting Ecological Risk Assessments* (Ohio EPA 2008) includes a PBT compound screen in the Level II ERA. This screen is necessary because not all ESVs account for bioaccumulation; instead, they are derived based primarily on toxicity to endpoint receptors exposed by direct contact (e.g., plants, soil-dwelling invertebrates) or ingestion of soil or water (e.g., mammals, birds). Ohio EPA allows PBTs to be screened out in Level II if the "method used to derive the screening value considered exposure to higher trophic level organisms in the development of the screening value" (Ohio EPA 2008).

Bioaccumulation in higher trophic levels is considered when developing the ESV for the first two sources of soil ESVs preferred by Ohio EPA (EcoSSLs and PRGs). Derivation of EcoSSL values includes uptake equations that account for direct ingestion and food chain bioaccumulation (USEPA 2007a). The same is true of PRGs: "the 90th percentile of the soil-to-biota uptake factor was used as a conservative estimate of the chemical concentrations in wildlife food types (earthworms, plants, or small mammals)," and "the model accounts for the ingestion of soil as well as food" (DOE 1997). It is also important to note that both sources often derive values for multiple receptors, and the most conservative (lowest) value is chosen. Thus, for soil ESVs from these two sources, PBT compounds

that have ratios less than one can be dismissed as final COPECs. For this ERA, this includes PCB-1260.

The ESV for mercury accounts for bioaccumulation (DOE 1997). Mercury was detected in soil above the ESV. This exceedance can be expected, considering the background concentration is 70 times greater than the ESV. However, the similarity between the mean concentration of mercury (0.077 mg/kg) and the background concentration (0.036 mg/kg) (Table 7-22) suggests exposures to mercury at Atlas Scrap Yard are not very different from background conditions. Thus, mercury is eliminated from further consideration as a PBT compound and will not be a final COPEC.

COPECs without ESVs. The *Guidance for Conducting Ecological Risk Assessments* specifies that chemicals without screening benchmark values should be retained as COPECs (Ohio EPA 2008). While Ohio EPA allows the use of additional screening benchmark values, such values need to be approved prior to submitting the report. For Atlas Scrap Yard, a search for (and subsequent approval of) additional values was deemed unnecessary. Rather, to mitigate concern for the uncertainties associated with COPECs that lack ESVs, a limited additional evaluation was conducted for each medium, focusing on frequency of detection, relationship to background concentration, and other chemical-specific refinement factors.

For soil at Atlas Scrap Yard Area, the integrated COPECs without ESVs are 2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; 4-amino-2,6-DNT; HMX; nitrocellulose; tetryl; carbazole; and dibenzofuran. 2-Amino-4,6-DNT (2 of 65); 2-nitrotoluene (2 of 65); 3-nitrotoluene (4 of 65); 4-amino-2,6-DNT (6 of 65); HMX (1 of 65); and tetryl (4 of 65) were detected infrequently. Thus, exposure to these chemicals would be limited. While nitrocellulose was detected in 5 of 6 samples, it is essentially non-toxic (USEPA 1987), and this chemical is also not expected to be an ecological concern. Because there is no ESV for carbazole (4 of 7) and dibenzofuran (6 of 7), they are assumed to be of limited concern to ecological receptors with respect to toxicity.

Evaluation of Wetland EUs - Because individual ISM results were used in the evaluations of the wetland EUs (Wetlands 1, 6, 8, and 9), several of the evaluation and refinement factors used in Step 3A for the entire Atlas Scrap Yard soil are not applicable (e.g., comparisons of mean concentrations to ESVs or background concentrations or evaluation of frequency of chemical occurrence). The evaluation and refinement factors used in Step 3A for one or more wetlanEUs include:

- Comparing the background concentration to ESV;
- Comparing the detected concentration to the SRV;
- Evaluating the magnitude of ESV exceedance (ratio of ESV to chemical concentrations);
- Discussing Ohio EPA approved and preferred ESVs;
- Evaluating geographical relationship of on-site wetlands to AOC exceedance area.

The integrated COPECs selected for further evaluation include mercury at Wetlands 1, 6, 8, and 9, manganese, selenium and naphthalene at Wetland 6, and nitrocellulose, carbazole, and dibenzofuran at Wetland 8. Because mercury was a common integrated COPEC for all of the wetlands, the

evaluation of mercury is discussed first, followed by the integrated COPECs that were identified only at Wetland 6 and Wetland 9.

Mercury at Wetlands 1, 6, 8, and 9. Mercury was detected in the ISM soil in Wetlands 1, 6, 8, and 9. The concentrations of mercury in the ISM soil ranged from 0.050–0.098 mg/kg (Table 7-19). These concentrations are all above the conservative ESV (0.00051 mg/kg) and soil background criteria (0.036 mg/kg). The Ohio EPA approved and preferred mercury ESV used in this ERA is 0.00051 mg/kg (Appendix Table H-4). The ESV is lower than other ESVs for mercury (0.1 mg/kg), the ESV for methylmercury (0.0016 mg/kg) (USEPA 2000, USEPA 2001, USEPA 2003b) (Appendix Table H-4), and the background concentration (0.036 mg/kg), which indicates the ESV is very conservative. If the ESV above background (0.1 mg/kg) were selected for comparison to the mercury concentrations in ISM soil in Wetlands 1, 6, 8, and 9, mercury would be below the ESV. In addition, some of the mercury concentrations were below the sediment background concentration and all were below the SRV. Based on these refinement factors, the integrated COPEC mercury was eliminated as a final COPEC from Wetlands 1, 6, 8, and 9.

Wetland 6. For Wetland 6, manganese, selenium, and naphthalene exceeded their ESVs for sample ASYss-082, and will be evaluated further based on applicable Step 3A factors.

For manganese and selenium, the ESV is much lower than the background concentrations and SRVs, indicating the ESV is likely too conservative. Although the ratio of the concentration to ESV for manganese is 11.4 (Table 7-19), the ratio of the concentration to background is only 1.3. Similarly, although the ratio of the concentration to ESV for selenium is 4.4, the ratio of the concentration to background is only 1.4.

As seen in the comparison to background concentrations, the ESVs for manganese and selenium may be too conservative. Alternate ESVs are available from sources approved by Ohio EPA. The Ohio EPA approved and preferred manganese ESV used in this ERA is 220 mg/kg. This ESV is from the USEPA EcoSSLs (Appendix Table H-4). The manganese ESV used in this ERA is the most conservative ESV of the USEPA EcoSSLs. Other EcoSSLs for manganese include 450 mg/kg, 4,000 mg/kg, and 4,300 mg/kg (USEPA 2007c). The ESV of 220 mg/kg is about twice as low as the ESV (500 mg/kg) from the next source of ESVs preferred by Ohio EPA (Appendix Table H-4) (DOE 1997). Only the two highest EcoSSLs (4,000 and 4,300 mg/kg) are above the background concentration of 1,950 mg/kg. If an ESV above the background concentration were selected, manganese would be below the ESV. This information indicates the selection of manganese as a COPEC for Wetland 6 is very conservative.

The Ohio EPA approved and preferred selenium ESV used in this ERA is 0.52 mg/kg. This ESV is from the USEPA EcoSSLs (Appendix Table H-4). The selenium ESV used in this ERA is the most conservative ESV of the USEPA EcoSSLs. Other EcoSSLs for selenium include 0.63 mg/kg, 1.2 mg/kg, and 4.1 mg/kg (USEPA 2007d). The ESV of 0.52 mg/kg is the highest of the three from the sources of ESVs preferred by Ohio EPA (Appendix Table H-4). Only the highest EcoSSL (4.1 mg/kg) is above the background concentration of 1.7 mg/kg. If this ESV above the background

concentration were selected, selenium would be below the ESV. This information indicates the selection of selenium as a COPEC for Wetland 6 is conservative.

The small concentration-to-ESV ratio for naphthalene (1.31) indicates the potential for toxicity is relatively low, and this likely supports elimination of this integrated COPEC.

Wetland 6 is an intermittent Category 2 (moderate quality) wetland that continues offsite to the west (Figure 7-4). However, no COPECs were identified in the ISM sample covering the portion of Wetland 6 inside the boundary of Atlas Scrap Yard (ASYss-086M). The COPECs identified for Wetland 6 are from sample ASYss-082M a few feet away. Migration of contaminants to the wetland is possible, but the terrain is relatively flat and a road separates sample ASYss-082M from the wetland. Thus, the possibility of the combination of COPECs present within the intermittent wetland and migration offsite is unlikely.

Based on these refinement factors, the three integrated COPECs remaining (manganese, selenium, and naphthalene) are dismissed as final COPECs for Wetland 6.

Wetland 8. For Wetland 8, all three integrated COPECs (nitrocellulose, carbazole, and dibenzofuran) were identified due to lack of ESVs. As stated earlier, nitrocellulose is essentially non-toxic (USEPA 1987), and because there is no ESV for carbazole and dibenzofuran, they are assumed to be of limited concern to ecological receptors with respect to toxicity.

Summary of Findings in Step 3A – For all ISM samples across the entire Atlas Scrap Yard, 28 integrated COPECs were identified in the surface soil. Of the 28 integrated COPECs in surface soil at Atlas Scrap Yard, nine were eliminated as COPECs because they did not have ESVs and had low frequency of detection or little to no toxicity. One PBT compound (PCB-1260) was eliminated because it had a ratio less than one when using an ESV that accounted for bioaccumulation. Another PBT compound (mercury) was eliminated because its mean concentration was only slightly above its background concentration. Additional integrated COPECs were eliminated from further consideration because the mean concentration is smaller than the ESV [arsenic, chromium, cobalt, copper, silver, benz(a)anthracene, and chrysene] or the mean concentration is smaller than the background concentration (aluminum, manganese, and selenium). 2,6-DNT was eliminated as a final COPEC due to low frequency of detection. The remaining seven integrated COPECs in soil [cadmium, lead, mercury, zinc, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, and naphthalene] have a combination of factors that together eliminated them from further consideration. These factors are presented below:

1. Mean concentration is only slightly higher than background concentrations (i.e., lead, mercury, and zinc).
2. Mean concentration-to-ESV ratio of exceedance is near one (i.e., cadmium, zinc, benzo(a)pyrene, bis(2-ethylhexyl)phthalate, and naphthalene).
3. Alternative ESV that is less conservative than the ESV used in this ERA results in ratio below one (for cadmium and mercury) or just slightly greater than one (for lead and zinc).

4. Wetland quality is medium or low. Migration of COPECs from AOC media to on-site wetlands is possible, but is limited by the vegetation and topography at the AOC.

No final COPECs were identified for Atlas Scrap Yard surface soil in the ISM samples across the entire Atlas Scrap Yard.

For the individual ISM sample evaluations at Wetlands 1, 6, 8, and 9, 7 integrated COPECs were identified in the surface soil (mercury in the soil at Wetlands 1, 6, 8, and 9; manganese, selenium, and naphthalene at Wetland 6; and nitrocellulose, carbazole, and dibenzofuran at Wetland 8). Three of the COPECs (manganese, mercury, and selenium) were eliminated from further consideration as the alternative ESVs that are less conservative than the ESVs used in the ERA results in ratios below one. In addition, mercury was detected below the SRV in all wetlands.

One integrated COPEC (naphthalene) was eliminated from consideration based on the magnitude of the ratio of the concentration to the ESV. Although the concentration-to-ESV ratio for naphthalene (1.31) indicates a possibility of risk, the ratio is relatively small. This indicates the potential for toxicity is relatively low, and this likely supports elimination of the integrated COPEC.

For soil at Wetlands 6 and 8, the integrated COPECs without ESVs are nitrocellulose, carbazole, and dibenzofuran. Nitrocellulose is essentially non-toxic (USEPA 1987), and this chemical is also not expected to be an ecological concern. Because there is no ESV for carbazole and dibenzofuran, they are assumed to be of limited concern to ecological receptors with respect to toxicity.

No final COPECs were identified for the ISM samples collected from within and in proximity of Wetlands 1, 6, 8, and 9.

7.3.3.8 Consideration of Human Health Driven Remediation

Atlas Scrap Yard has a human health COC (lead) identified as requiring remediation within the IA. The HHRA recommends remediation of surface soil (0–1 ft bgs) in ISM sample area ASYss-019M-SO. There are also COCs (PAHs) within the ASA that the HHRA recommends for remediation in multiple sample locations. Removing contaminated soil at the AOC and replacing it with clean soil lowers the concentration to ESV ratios; therefore, removing the contaminated soil lowers the ecological risk. This supplements the earlier finding that the four inorganic chemicals (cadmium, lead, mercury, and zinc) can be eliminated from further consideration.

7.3.3.9 Uncertainties and Mitigations

Uncertainties or unknowns are present in the exposure and effects data. To mitigate uncertainty in exposure data, the MDCs of all available and appropriate data were used in Level I. In Level II, the MDC and mean COPEC concentrations were used to mitigate uncertainty concerning exposure data for receptors in the AOC. To mitigate uncertainty in effects information, a site visit for habitat condition was conducted, and the latest INRMP was used, which provides natural resource

information for Camp Ravenna, including state-listed or federally listed species sightings and jurisdictional wetlands (OHARNG 2014). In addition, the ORAM was applied to the wetlands. Conservative ESVs, which are typically based on concentrations observed to have no effect on test species in laboratory studies, were used in Level II to mitigate uncertainty concerning effects on receptors in the AOC. Some chemicals are COPECs because they do not have ESVs. These COPECs are assumed to have limited toxicity given the lack of cause-effect laboratory tests and field-observed effects in the scientific literature.

In Level II, to mitigate uncertainty concerning effects on receptors in the AOC, the ESVs for COPECs are compared to background concentrations. Using ESVs that are lower than background concentrations provides an indication of the conservative nature of the evaluation. Conservative ESVs are appropriate for use as screening thresholds in Level I and II (i.e., soil constituents with an MDC below the ESV need no further consideration in Level II).

In addition to the ISM samples, surface and subsurface soil samples were collected using discrete sampling methods. Discrete data were used at Atlas Scrap Yard to evaluate the nature and extent of contaminants and to evaluate chromium speciation (in a subset of samples). Only the ISM data were used for the ERA; however, a comparison of the discrete data and ISM data was conducted to reduce uncertainty associated with the various sampling methods.

In the PBA08 ISM data discussed in Section 7.3.3.4 (Table 7-18 and Appendix Table H-5), 60 chemicals were detected in surface soil. Of the 60 detected chemicals, 12 inorganic chemicals and 16 organic chemicals were identified as integrated COPECs (Appendix Table H-5).

In the discrete data, (Appendix Table H-13), 53 chemicals were detected in surface soil. Five chemicals (calcium, iron, magnesium, potassium, and sodium) were essential nutrients and were excluded as SRCs, as described in Section 4.4.2.3. Sixteen detected inorganic chemicals and 30 organic chemicals were determined to be SRCs because they either exceeded background concentrations or did not have an associated background concentration for comparison. Of the 46 SRCs, 14 inorganic chemicals (aluminum, antimony, barium, cadmium, chromium, cobalt, copper, lead, manganese, mercury, nickel, selenium, silver, and zinc) and four organic chemicals [2,6-DNT; benzo(a)pyrene; chrysene; and naphthalene] exceeded their ESVs and are identified as integrated COPECs (Appendix Table H-13). In addition, six organic chemicals (3-nitrotoluene; 4-amino-2,6-DNT; HMX; nitrocellulose; PETN; and tetryl) were selected as integrated COPECs because they do not have an ESV. Besides exceeding the ESV, mercury is also a PBT compound. The calculated ratio of MDC to ESV is shown in Table 7-24 for each integrated COPEC in the discrete surface soil data set. Appendix H Table H-13 presents the details of the ESV comparisons for surface soil for the discrete soil data set.

Integrated COPECs identified in the discrete soil and ISM soil data were similar (Table 7-25). If the discrete data were used instead of the ISM soil data in the ERA, four new additional integrated COPECs would have been selected (antimony, barium, nickel, and PETN) that were not identified as integrated COPECs in the ERA based on the ISM soil data. Although these integrated COPECs were

not selected from the ISM data set, these COPECs would have been eliminated from further consideration in Step 3A if the discrete data had been used for the ERA. Two of the integrated COPECs (barium and nickel) in the discrete soil would have been eliminated in Step 3A because their mean concentrations (233 and 12.4 mg/kg, respectively) were smaller than their ESVs (330 and 38 mg/kg). One integrated COPEC (antimony) in discrete soil would have been eliminated in Step 3A because the mean (0.513 mg/kg) is larger than the ESV (0.27 mg/kg), but smaller than the background criteria (0.96 mg/kg). PETN was detected in only 1/19 discrete soil samples. PETN would have been eliminated as a COPEC because of the low frequency of detection. In summary, although four new integrated COPECs would be selected with the use of the discrete data in comparison to the ISM data used in the ERA, these COPECs would be screened out during the refinement process of Step 3A. As a result, the uncertainty associated with selection of the COPECs based on the ISM versus the discrete data at the Atlas Scrap Yard is limited.

When the maximum and mean concentrations of the ISM integrated COPECs used in the ERA were compared to the maximum and mean concentrations of the discrete data, the MDC of explosives, SVOCs, and PCBs are generally higher in the ISM data than the discrete data. For metals, the maximum and mean concentrations of the ISM integrated COPECs used in the ERA were higher or similar in concentration for aluminum, arsenic, cadmium, chromium, cobalt, and zinc. Antimony, barium, and nickel were identified as integrated COPECs in the discrete data, but not the ISM data (discussed above). Because these metals would have been eliminated from further consideration in the Step 3A analysis, there is little uncertainty associated with differences in the ISM and discrete dataset for the chemicals.

Copper, lead, manganese, mercury, selenium, and silver maximum and mean concentrations were higher in the discrete data than in the ISM data used in the ERA (Table 7-25). The ratio of the mean concentration to the ESV and/or background criteria is just above one or less than one for copper, manganese, selenium, and silver. As a result, these integrated COPECs would be eliminated from further consideration. Lead and mercury are discussed further below.

Lead - Lead was detected in all 19 of the discrete surface soil samples. The maximum and average concentrations of lead are higher in the discrete data than in the ISM data set. The concentration of lead at one discrete soil sampling location (3,570 mg/kg at ASYsb-064) collected near the incinerator is much more elevated than the remaining 18 soil samples (ranging from 2.2–60.1 mg/kg). An ISM sample (ASYss-070M) was collected around this discrete soil location covering 0.1 acres to delineate the contamination found in the IA. The concentration of lead in the ISM sample was 312 mg/kg, which suggests the extent of contamination is limited.

Mercury - Mercury was detected in 13 of 19 of the discrete surface soil samples. The maximum and average concentrations of mercury are higher in the discrete data than in the ISM data set. The concentration of mercury at one location (4.5 mg/kg at ASYsb-056) is much more elevated than the remaining 12 soil samples (ranging from 0.023–0.14 mg/kg). An ISM sample (ASYss-100M) was collected around the chipped boxes where this discrete sample was collected. The concentration of mercury in this ISM sample was 0.058 mg/kg, which suggests the extent of contamination is limited.

In summary, the concentrations of explosives, SVOCs, and PAHs are generally higher in the ISM data than in the discrete data set, so there is limited uncertainty in selecting the ISM for the ERA in comparison to the discrete data. For the metals, the concentrations of six metals were higher in the discrete data than in the ISM data. Similar to the refinement process used in the ERA with the ISM data, four of those metals (copper, manganese, selenium, and silver) would have been eliminated from consideration with the comparison of the mean concentrations to the background criteria and/or ESV. Lead and mercury each have one location with a concentration more elevated than the remaining discrete data concentrations. For both of these locations, the ISM sampling indicates the extent of the elevated concentrations is limited. As a result, wildlife exposure would also be limited and no further evaluation of these metals would be conducted.

7.3.3.10 Summary and Conclusions of Screening Level Ecological Risk Assessment

Integrated COPECs were identified in surface soil for the entire Atlas Scrap Yard. Most of the soil COPECs identified in the historical ERA were also identified during screening of PBA08 RI data. Four historical COPECs (barium, iron, nickel, and 4-methylphenol) were not identified during the PBA08 RI, and eight new COPECs [cobalt; 2,6-DNT; 4-amino-2,6-DNT; HMX; tetryl; benz(a)anthracene; carbazole; and chrysene] were identified due to additional sampling data. Those chemicals retained after screening historical and PBA08 RI data were termed integrated COPECs.

Integrated COPECs were also identified in the surface soil for the individual ISM samples evaluated at Wetlands 1, 6, 8, and 9. Because these samples were collected to focus only on the individual wetlands, a comparison to historical COPECs was not conducted for the individual wetland evaluations.

A total of 28 integrated soil COPECs were further evaluated for the entire Atlas Scrap Yard and a total of 7 integrated soil COPECs were further evaluated for individual ISM samples collected from Wetlands 1, 6, 8, and 9 with technical and refinement factors in Step 3A. All integrated soil COPECs were determined to be of no ecological concern. None require remediation or further evaluation. Consequently, the ERA for Atlas Scrap Yard can conclude with Level II and NFA is recommended from the ecological perspective.

7.3.4 Conclusions

There is chemical contamination present in surface soil at Atlas Scrap Yard. This contamination was identified using historical and PBA08 RI data. Forest alliances consisting of seasonally flooded, pin oak/swamp white oak alliance; dry, red maple, successional forest alliance; dry, late-successional, cold-deciduous shrubland; dry, early-successional, herbaceous field; and semi-permanently flooded cattail/bulrush alliances were observed on the 73 acres of the AOC. Wetlands are important and significant ecological resources near contamination in the AOC. These findings invoked a Level II assessment.

The Level II assessment evaluated soil using historical and PBA08 RI data, identified integrated COPECs, and evaluated the integrated COPECs using technical and refinement factors in Step 3A. The factors in Step 3A showed there is no further evaluation necessary for integrated COPECs for the entire AOC, and there is no ecological concern requiring remediation. In addition, based on their ORAM category, size, and location, Wetlands 1, 6, 8, and 9 were evaluated using individual ISM samples representative of the wetland or the area between the wetland and potential sources areas. Based on the limited exceedances in these individual ISM samples, significant releases from the source areas at Atlas Scrap Yard to the wetlands have not occurred. Consequently, the ERA for Atlas Scrap Yard can conclude with Level II and NFA is recommended from the ecological perspective.

Table 7-1. Risk Assessment Dataset for Surface Soil (0–1 ft bgs) ISM Samples

Station	Sample ID	Date	Depth (ft bgs)	Size of ISM Area (acres)
Active Storage Area Grid Samples				
ASYss-088M	ASYss-088M-5756-SO	4/5/2010	0–1	3.1
ASYss-089M	ASYss-089M-5763-SO	4/5/2010	0–1	3.9
ASYss-093M	ASYss-093M-5767-SO	4/6/2010	0–1	3.8
ASYss-094M	ASYss-094M-5768-SO	4/6/2010	0–1	3.8
Inactive Area Grid Samples				
ASYss-086M	ASYss-086M-5760-SO	4/2/2010	0–1	3.4
ASYss-087M	ASYss-087M-5761-SO	4/2/2010	0–1	4.0
ASYss-090M	ASYss-090M-5764-SO	4/5/2010	0–1	4.0
ASYss-091M	ASYss-091M-5765-SO	4/5/2010	0–1	3.9
ASYss-092M	ASYss-092M-5766-SO	4/5/2010	0–1	3.8
ASYss-095M	ASYss-095M-5769-SO	4/6/2010	0–1	4.0
ASYss-096M	ASYss-096M-5770-SO	4/5/2010	0–1	3.8
ASYss-097M	ASYss-097M-5771-SO	4/6/2010	0–1	4.0
ASYss-098M	ASYss-098M-5772-SO	4/6/2010	0–1	4.0
ASYss-099M	ASYss-099M-5773-SO	4/6/2010	0–1	3.8
ASYss-100M	ASYss-100M-5774-SO	4/6/2010	0–1	4.2
ASYss-101M	ASYss-101M-5775-SO	4/6/2010	0–1	4.0
ASYss-102M	ASYss-102M-5776-SO	4/6/2010	0–1	4.0
ASYss-103M	ASYss-103M-5777-SO	4/5/2010	0–1	4.0
Active Storage Area Source Area Samples				
ASYss-002M	ASYss-002M-SO	11/4/2004	0–1	0.6
ASYss-005D[a]	ASYss-005D-SO	11/4/2004	0–1	NA
ASYss-005M	ASYss-005M-SO	11/4/2004	0–1	0.08
ASYss-073M	ASYss-073M-5747-SO	4/6/2010	0–1	0.2
ASYss-074M	ASYss-074M-5748-SO	4/6/2010	0–1	0.08
ASYss-075M	ASYss-075M-5749-SO	4/6/2010	0–1	0.1
ASYss-076M	ASYss-076M-5750-SO	4/6/2010	0–1	0.07
ASYss-077M	ASYss-077M-5751-SO	4/7/2010	0–1	0.3
ASYss-078M	ASYss-078M-5752-SO	4/7/2010	0–1	0.2
ASYss-079M	ASYss-079M-5753-SO	4/7/2010	0–1	0.2
ASYss-080M	ASYss-080M-5754-SO	4/7/2010	0–1	0.2
ASYss-111M	ASYss-111M-5835-SO	4/20/2011	0–1	0.2
ASYss-112M	ASYss-112M-5836-SO	4/20/2011	0–1	0.2
ASYss-113M	ASYss-113M-5837-SO	4/20/2011	0–1	0.2
ASYss-114M	ASYss-114M-5838-SO	4/20/2011	0–1	0.02
ASYss-115M	ASYss-115M-5839-SO	4/20/2011	0–1	0.01
ASYss-116M	ASYss-116M-5840-SO	4/21/2011	0–1	0.2
ASYss-117M	ASYss-117M-5841-SO	4/21/2011	0–1	0.2
ASYss-118M	ASYss-118M-5842-SO	4/21/2011	0–1	0.5
ASYss-119M	ASYss-119M-5843-SO	4/21/2011	0–1	0.5
ASYss-120M	ASYss-120M-5844-SO	4/21/2011	0–1	0.3
ASYss-121M	ASYss-121M-5845-SO	4/21/2011	0–1	2.7
ASYss-122M	ASYss-122M-5846-SO	4/21/2011	0–1	0.1
ASYss-123M	ASYss-123M-5847-SO	4/21/2011	0–1	0.1
ASYss-124M	ASYss-124M-5848-SO	4/21/2011	0–1	3.3
ASYss-125M	ASYss-125M-5849-SO	4/21/2011	0–1	3.0
ASYss-126M	ASYss-126M-5850-SO	4/21/2011	0–1	0.2

Table 7–1. Risk Assessment Dataset for Surface Soil (0–1 ft bgs) ISM Samples (continued)

Station	Sample ID	Date	Depth (ft bgs)	Size of ISM Area (acres)
Inactive Area Source Area Samples				
ASYss-006M	ASYss-006M-SO	11/4/2004	0–1	0.1
ASYss-007M	ASYss-007M-SO	11/4/2004	0–1	0.2
ASYss-008M	ASYss-008M-SO	11/4/2004	0–1	0.2
ASYss-009M	ASYss-009M-SO	11/4/2004	0–1	0.2
ASYss-010M	ASYss-010M-SO	11/3/2004	0–1	0.3
ASYss-011M	ASYss-011M-SO	11/3/2004	0–1	0.2
ASYss-012D[a]	ASYss-012D-SO	11/4/2004	0–1	NA
ASYss-012M	ASYss-012M-SO	11/4/2004	0–1	0.08
ASYss-013D[a]	ASYss-013D-SO	11/3/2004	0–1	NA
ASYss-013M	ASYss-013M-SO	11/3/2004	0–1	0.08
ASYss-014M	ASYss-014M-SO	11/4/2004	0–1	0.3
ASYss-015D[a]	ASYss-015D-SO	11/4/2004	0–1	NA
ASYss-015M	ASYss-015M-SO	11/4/2004	0–1	0.2
ASYss-016M	ASYss-016M-SO	11/3/2004	0–1	0.1
ASYss-017M	ASYss-017M-SO	11/3/2004	0–1	0.2
ASYss-018M	ASYss-018M-SO	11/3/2004	0–1	0.1
ASYss-019M	ASYss-019M-SO	11/10/2004	0–1	0.08
ASYss-020M	ASYss-020M-SO	11/3/2004	0–1	0.3
ASYss-021M	ASYss-021M-SO	11/3/2004	0–1	0.3
ASYss-022M	ASYss-022M-SO	11/12/2004	0–1	0.3
ASYss-023M	ASYss-023M-SO	11/11/2004	0–1	0.1
ASYss-025M	ASYss-025M-SO	11/11/2004	0–1	0.3
ASYss-026M	ASYss-026M-SO	11/3/2004	0–1	0.1
ASYss-027D[a]	ASYss-027D-SO	11/3/2004	0–1	NA
ASYss-027M	ASYss-027M-SO	11/3/2004	0–1	0.2
ASYss-028M	ASYss-028M-SO	11/3/2004	0–1	0.3
ASYss-029M	ASYss-029M-SO	11/11/2004	0–1	0.3
ASYss-030M	ASYss-030M-SO	11/10/2004	0–1	0.5
ASYss-031M	ASYss-031M-SO	11/10/2004	0–1	0.5
ASYss-032M	ASYss-032M-SO	11/2/2004	0–1	0.2
ASYss-033M	ASYss-033M-SO	11/3/2004	0–1	0.3
ASYss-034M	ASYss-034M-SO	11/3/2004	0–1	0.4
ASYss-066[b]	ASYss-066-5778-SO	4/7/2010	0–1	NA
ASYss-067[b]	ASYss-067-5779-SO	4/7/2010	0–1	NA
ASYss-068[b]	ASYss-068-5780-SO	4/7/2010	0–1	NA
ASYss-069M	ASYss-069M-5743-SO	4/7/2010	0–1	0.2
ASYss-070M	ASYss-070M-5744-SO	4/5/2010	0–1	0.1
ASYss-071M	ASYss-071M-5745-SO	4/6/2010	0–1	0.3
ASYss-072M	ASYss-072M-5746-SO	4/7/2010	0–1	0.2
ASYss-081M	ASYss-081M-5755-SO	4/2/2010	0–1	0.3
ASYss-082M	ASYss-082M-5756-SO	4/2/2010	0–1	0.1
ASYss-083M	ASYss-083M-5757-SO	4/2/2010	0–1	0.1
ASYss-084M	ASYss-084M-5758-SO	4/2/2010	0–1	0.1
ASYss-085M	ASYss-085M-5759-SO	4/2/2010	0–1	0.1

[a] Discrete sample taken in ISM areas for the determination of volatile organic compounds.
[b] Chromium speciation samples used to evaluate the presence of hexavalent chromium. ASYss-066 collected at ISM area ASYss-031M; ASYss-067 collected at ISM area ASYss-019M; ASYss-068 collected at ISM area ASYss-013M.
ft bgs = Feet below ground surface.
ID = Identification.
ISM = Incremental Sampling Method.
NA = Not applicable.

Table 7-2. Risk Assessment Dataset for Subsurface Soil

Station	Sample ID	Date	Depth (ft bgs)
Active Storage Area Subsurface Soil Samples			
ASYsb-046	ASYsb-046-5665-SO	4/5/2010	1–4
ASYsb-046	ASYsb-046-5666-SO	4/5/2010	4–7
ASYsb-047	ASYsb-047-5669-SO	4/5/2010	1–4
ASYsb-047	ASYsb-047-5670-SO	4/5/2010	4–7
ASYsb-048	ASYsb-048-5673-SO	4/5/2010	1–4
ASYsb-048	ASYsb-048-5674-SO	4/5/2010	4–7
ASYsb-049	ASYsb-049-5677-SO	4/5/2010	1–4
ASYsb-049	ASYsb-049-5678-SO	4/5/2010	4–7
ASYsb-049	ASYsb-049-5686-SO	4/6/2010	8–9.5
ASYsb-049	ASYsb-049-5679-SO	4/5/2010	7–13
Inactive Area Subsurface Soil Samples			
ASYsb-045	ASYsb-045-5661-SO	4/5/2010	1–4
ASYsb-045	ASYsb-045-5662-SO	4/5/2010	4–7
ASYsb-045	ASYsb-045-5663-SO	4/5/2010	7–13
ASYsb-050	ASYsb-050-5681-SO	4/7/2010	1–4
ASYsb-050	ASYsb-050-5682-SO	4/7/2010	4–7
ASYsb-052	ASYsb-052-5689-SO	4/6/2010	1–4
ASYsb-052	ASYsb-052-5690-SO	4/6/2010	4–7
ASYsb-053	ASYsb-053-5693-SO	4/7/2010	1–4
ASYsb-053	ASYsb-053-5694-SO	4/7/2010	4–7
ASYsb-054	ASYsb-054-5697-SO	4/6/2010	1–4
ASYsb-054	ASYsb-054-5698-SO	4/6/2010	4–7
ASYsb-056	ASYsb-056-5703-SO	4/7/2010	1–4
ASYsb-056	ASYsb-056-5704-SO	4/7/2010	4–7
ASYsb-057	ASYsb-057-5707-SO	4/7/2010	1–4
ASYsb-057	ASYsb-057-5708-SO	4/7/2010	4–7
ASYsb-058	ASYsb-058-5711-SO	4/7/2010	1–4
ASYsb-058	ASYsb-058-5712-SO	4/7/2010	4–7
ASYsb-059	ASYsb-059-5715-SO	3/30/2010	1–4
ASYsb-059	ASYsb-059-5716-SO	3/30/2010	4–7
ASYsb-059	ASYsb-059-5717-SO	3/30/2010	7–13
ASYsb-060	ASYsb-060-5719-SO	3/30/2010	1–4
ASYsb-060	ASYsb-060-5720-SO	3/30/2010	4–7
ASYsb-061	ASYsb-061-5723-SO	3/30/2010	1–4
ASYsb-061	ASYsb-061-5724-SO	3/30/2010	4–7
ASYsb-062	ASYsb-062-5727-SO	3/30/2010	1–4
ASYsb-062	ASYsb-062-5728-SO	3/30/2010	4–7
ASYsb-063	ASYsb-063-5731-SO	4/7/2010	1–4
ASYsb-063	ASYsb-063-5732-SO	4/7/2010	4 – 7
ASYsb-064	ASYsb-064-5735-SO	3/30/2010	1–4
ASYsb-064	ASYsb-064-5736-SO	3/30/2010	4 – 7
ASYsb-065	ASYsb-065-5739-SO	4/7/2010	1 – 4
ASYsb-065	ASYsb-065-5740-SO	4/7/2010	4–7

ft bgs = Feet below ground surface.
ID = Identification.

Table 7-3. Summary of SRCs in Soil

SRC	Surface Soil (0–1 ft bgs)	Subsurface Soil (1–13 ft bgs)
Metals		
Aluminum	X	--
Arsenic	X	X
Barium	X	--
Beryllium	X	X
Cadmium	X	X
Chromium	X	--
Cobalt	X	X
Copper	X	--
Lead	X	X
Manganese	X	--
Mercury	X	--
Nickel	X	--
Selenium	X	X
Silver	X	X
Thallium	X	--
Zinc	X	--
Explosives		
4-Amino-2,6-Dinitrotoluene	X	--
2-Amino-4,6-Dinitrotoluene	X	--
2,6-Dinitrotoluene	X	--
HMX	X	X
Nitrocellulose	X	X
2-Nitrotoluene	X	--
3-Nitrotoluene	X	X
Tetryl	X	--
1,3,5-Trinitrobenzene	X	--
Semi-volatile Organic Compounds		
Acenaphthene	X	X
Acenaphthylene[e]	X	X
Anthracene	X	X
Benz(a)anthracene	X	X
Benzenemethanol	X	--
Benzo(a)pyrene	X	X
Benzo(b)fluoranthene	X	X
Benzo(ghi)perylene[e]	X	X
Benzo(k)fluoranthene	X	X
Bis(2-ethylhexyl)phthalate	X	X
Butyl benzyl phthalate	X	--
Carbazole	X	--
Chrysene	X	X
Dibenz(a,h)anthracene	X	X
Dibenzofuran	X	--
Diethyl phthalate	X	--
Di-n-butyl phthalate	X	--
Fluoranthene	X	X
Fluorene	X	X
Indeno(1,2,3-cd)pyrene	X	X
2-Methylnaphthalene	X	--
4-Methylphenol	X	--
Naphthalene	X	X
Phenanthrene[e]	X	X

Table 7–3. Summary of SRCs in Soil (continued)

SRC	Surface Soil (0–1 ft bgs)	Subsurface Soil (1–13 ft bgs)
Phenol	X	--
Pyrene	X	X
Pesticides/PCBs		
PCB-1260	X	--
Volatile Organic Compounds		
Acetone	X	--
2-Butanone	--	X
Carbon disulfide	--	X
Toluene	--	X

ft bgs = Feet below ground surface.
HMX = Octahydro-1,3,5,7-tetranitroi-1,3,5,7-tetrazocane.
PCB = Polychlorinated biphenyl.
SRC = Site-related contaminant.
X = Chemical is an SRC in this medium.
-- = Chemical is not an SRC in this medium.

Table 7-4. Summary of COPCs in Soil

COPC	Surface Soil (0–1 ft bgs)	Subsurface Soil (1–13 ft bgs)
Metals		
Aluminum	X	--
Arsenic	X	X
Cadmium	X	--
Chromium[a]	X[a]	--
Cobalt	X	X
Lead	X	--
Manganese	X	--
Semi-volatile Organic Compounds		
Benz(a)anthracene	X	X
Benzo(a)pyrene	X	X
Benzo(b)fluoranthene	X	X
Benzo(k)fluoranthene	X	--
Chrysene	X	--
Dibenz(a,h)anthracene	X	X
Indeno(1,2,3-cd)pyrene	X	X

[a] The maximum detected concentration exceeded the screening FWCUG for hexavalent chromium but is less than the FWCUG for trivalent chromium.
ft bgs = Feet below ground surface.
COPC = Chemical of Potential Concern
X = Chemical identified as a COPC in this medium.
-- = Chemical not identified as a COPC in this medium.

Table 7-5. Screening Levels Corresponding to an HQ of 1.0 and Target Risk of 1E-05 in Soil

COPC	Critical Effect or Target Organ	Screening Level (mg/kg)					
		Resident Receptor[a] FWCUG		Industrial Receptor RSL		NGT Receptor FWCUG	
		HQ=1	TR=10^{-5}	HQ=1	TR=10^{-5}	HQ=1	TR=10^{-5}
Aluminum	Neurotoxicity in offspring	73,798	--	1,100,000	--	34,960	--
Arsenic	Skin	20.2	4.25[b]	480	30	1,140	27.8
Cadmium	Significant proteinuria	64.1	12,491	980	93,000	3,292	109
Chromium, trivalent	NOAEL	81,473	--	1,800,000	--	3,297,630	--
Cobalt	Thyroid	1,313	8,030	350	19,000	140	70
Lead	NA	400[c]	--	800	--	800[d]	--
Manganese	Central Nervous System	2,927	--	26,000	--	351	--
Benz(a)anthracene	NA	--	2.21	--	29	--	47.7
Benzo(a)pyrene	NA	--	0.221	--	2.9	--	4.77
Benzo(b)fluoranthene	NA	--	2.21	--	29	--	47.7
Benzo(k)fluoranthene	NA	--	22.1	--	290	--	477
Chrysene	NA	--	221	--	2,900	--	4,774
Dibenz(a,h)anthracene	NA	--	0.221	--	2.9	--	4.77
Indeno(1,2,3-cd)pyrene	NA	--	2.21	--	29	--	47.7

[a] Resident Receptor FWCUGs are the lower of the Resident Receptor Adult or Resident Receptor Child values for each COPC and endpoint (non-cancer and cancer).
[b] FWCUG value is less than the background screening values for arsenic in surface soil (arsenic 15.4 mg/kg) and subsurface soil (arsenic 19.8 mg/kg).
[d] No FWCUG is available for lead; the Regional Screening Level (RSL) is used. No endpoint is specified for this screening level.
COPC = Chemical of Potential Concern.
FWCUG = Facility-Wide Cleanup Goal.
HQ = Hazard Quotient.
mg/kg = Milligram per kilogram.
NA = Not applicable.
NOAEL = No Observable Adverse Effect Level.
-- = No value available.

Table 7-6. Surface Soil COCs for Unrestricted (Residential) Land Use

Chemical of Concern	FWCUG[a] (mg/kg)	Sample Location	Location and Potential Source Area
Active Storage Area: Source Area ISM Samples			
PAHs		ASYss-077M	Railroad Ties Pile and Railroad Ballast Pile #1 Grid Area ASYss-088M
		ASYss-078M	
		ASYss-079M	
		ASYss-080M	
Benzo(a)anthracene	2.21	ASYss-111M	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in Grid Area ASYss-088M
Benzo(a)pyrene	0.221	ASYss-115M	Soil Pile in Grid Area ASYss-088M
Benzo(b)fluoranthene	2.21	ASYss-121M	Remainder of Grid Area ASYss-088M
Benzo(k)fluoranthene	22.1	ASYss-116M	Slag and Asphalt Parking Area in Grid Area ASYss-088M
Dibenz(a,h)anthracene	0.221	ASYss-117M	
		ASYss-119M	Slag and Asphalt Parking Area in Grid Area ASYss-088M and ASYss-089M
		ASYss-118M	Slag and Asphalt Parking Area in Grid Area ASYss-089M
		ASYss-124M	Remainder of Grid Area ASYss-089M
		ASYss-112M	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in Grid Area ASYss-093M
		ASYss-113M	
		ASYss-114M	
		ASYss-120M	
		ASYss-122M	
		ASYss-123M	Roadside in Grid Area ASYss-093M
		ASYss-126M	Roadside ditch in Grid Area ASYss-093M
		ASYss-076M	Concrete Footers Pile in Grid Area ASYss-093M and ASYss-094M
		ASYss-073M	
		ASYss-075M	
		ASYss-074M	
Inactive Area: Source Area ISM Samples			
Lead	400[b]	ASYss-019M	Former Incinerator

[a]Facility-wide Clean-up Goals (FWCUG) corresponding to a target risk of 1E-05 for Resident (Adult and Child) from Facilitiy-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant (USACE 2010a).
[b]No FWCUG available. Value is the USEPA Residential Regional Screening Level.
ft bgs = Feet below ground surface.
COC = Chemical of Concern.
mg/kg = Milligram per kilogram.

THIS PAGE INTENTIONALLY LEFT BLANK.

Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)

	Analyte (mg/kg)		**Arsenic**				**Lead**			
	CAS Number		7440-38-2				7439-92-1			
	FWCUG		Concentration	Resident*	Industrial	NGT	Concentration	Resident	Industrial	NGT*
		TR = 1E-05	(mg/kg)	4.25	30	27.8	(mg/kg)	400	800	800
	Background Screening Value		* Residential FWCUG < BSV, therefore BSV is used for screening				*No NGT FWCUG available, therefore Industrial value used			
		Surface	15.4				26.1			
		Subsurface	19.8				19.1			
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Result Exceeds FWCUG?			
Active Storage Area: Source Area ISM Samples										
2004	0 - 1	ASYss-002M	8.9	No	No	No	14	No	No	No
2010	0 - 1	ASYss-073M	8.4	No	No	No	20.1 J	No	No	No
2010	0 - 1	ASYss-074M	8.3	No	No	No	17.8 J	No	No	No
2010	0 - 1	ASYss-075M	8.8	No	No	No	18.4 J	No	No	No
2010	0 - 1	ASYss-076M	8.6	No	No	No	40.4 J	No	No	No
2010	0 - 1	ASYss-077M	9.7 J	No	No	No	16	No	No	No
2010	0 - 1	ASYss-078M	4.1 J	No	No	No	15.7	No	No	No
2010	0 - 1	ASYss-079M	4 J	No	No	No	13.1	No	No	No
2010	0 - 1	ASYss-080M	7.4 J	No	No	No	15.6	No	No	No
2011	0 - 1	ASYss-111M	10.1	No	No	No	15	No	No	No
2011	0 - 1	ASYss-112M	11.4	No	No	No	14.8	No	No	No
2011	0 - 1	ASYss-113M	11.6	No	No	No	15.7	No	No	No
2011	0 - 1	ASYss-114M	12.7	No	No	No	14.7	No	No	No
2011	0 - 1	ASYss-115M	6.3	No	No	No	59.6	No	No	No
2011	0 - 1	ASYss-116M	6.8	No	No	No	11.1	No	No	No
2011	0 - 1	ASYss-117M	8.2	No	No	No	15	No	No	No
2011	0 - 1	ASYss-118M	11.7	No	No	No	15.9	No	No	No
2011	0 - 1	ASYss-119M	11.4	No	No	No	17.5	No	No	No
2011	0 - 1	ASYss-120M	10.7	No	No	No	32.9	No	No	No
2011	0 - 1	ASYss-121M	9.3	No	No	No	25.4	No	No	No
2011	0 - 1	ASYss-122M	8.4	No	No	No	23.9	No	No	No
2011	0 - 1	ASYss-123M	3.7	No	No	No	23.8	No	No	No
2011	0 - 1	ASYss-124M	10.2	No	No	No	26.8	No	No	No
2011	0 - 1	ASYss-125M	9.8	No	No	No	42.7	No	No	No
2011	0 - 1	ASYss-126M	7	No	No	No	19	No	No	No
Active Storage Area: Grid ISM Samples										
2010	0 - 1	ASYss-088M	10.1 J	No	No	No	23.8 J	No	No	No
2010	0 - 1	ASYss-089M	8.9 J	No	No	No	22.5 J	No	No	No
2010	0 - 1	ASYss-093M	8.6	No	No	No	22.5 J	No	No	No
2010	0 - 1	ASYss-094M	9.2	No	No	No	24.3 J	No	No	No
Active Storage Area: Discrete Samples										
2010	0 - 1	ASYsb-046	1.7 J	No	No	No	2.2 J	No	No	No
2010	0 - 1	ASYsb-047	5.6 J	No	No	No	21.3 J	No	No	No
2010	0 - 1	ASYsb-048	14 J	No	No	No	24.7 J	No	No	No
2010	0 - 1	ASYsb-049	5.1 J	No	No	No	20.7 J	No	No	No

Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)

	Analyte (mg/kg)		**Arsenic**				**Lead**			
	CAS Number		7440-38-2				7439-92-1			
	FWCUG		Concentration	Resident*	Industrial	NGT	Concentration	Resident	Industrial	NGT*
	TR = 1E-05		(mg/kg)	4.25	30	27.8	(mg/kg)	400	800	800
	Background Screening Value		* Residential FWCUG < BSV, therefore BSV is used for screening				*No NGT FWCUG available, therefore Industrial value used			
	Surface		15.4				26.1			
	Subsurface		19.8				19.1			
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Result Exceeds FWCUG?			
2004	0 - 1	ASYss-018M	**41**	**Yes**	**Yes**	**Yes**	160	No	No	No
2004	0 - 1	ASYss-019M	11	No	No	No	**1200**	**Yes**	**Yes**	**Yes**
2004	0 - 1	ASYss-005M	6.3	No	No	No	23	No	No	No
2004	0 - 1	ASYss-006M	6.8	No	No	No	150	No	No	No
2004	0 - 1	ASYss-007M	9.8	No	No	No	49	No	No	No
2004	0 - 1	ASYss-008M	10	No	No	No	69	No	No	No
2004	0 - 1	ASYss-009M	7.3	No	No	No	19	No	No	No
2004	0 - 1	ASYss-010M	6.9	No	No	No	26	No	No	No
2004	0 - 1	ASYss-011M	4.8	No	No	No	22	No	No	No
2004	0 - 1	ASYss-012M	5.2	No	No	No	31	No	No	No
2004	0 - 1	ASYss-013M	10	No	No	No	97	No	No	No
2004	0 - 1	ASYss-014M	9.2	No	No	No	26	No	No	No
2004	0 - 1	ASYss-015M	9.4	No	No	No	28	No	No	No
2004	0 - 1	ASYss-016M	9.5	No	No	No	34	No	No	No
2004	0 - 1	ASYss-017M	22	Yes	No	No	110	No	No	No
2004	0 - 1	ASYss-020M	11	No	No	No	24	No	No	No
2004	0 - 1	ASYss-021M	13	No	No	No	17	No	No	No
2004	0 - 1	ASYss-022M	14	No	No	No	15	No	No	No
2004	0 - 1	ASYss-023M	11	No	No	No	20	No	No	No
2004	0 - 1	ASYss-025M	12	No	No	No	19	No	No	No
2004	0 - 1	ASYss-026M	7.8	No	No	No	14	No	No	No
2004	0 - 1	ASYss-027M	11	No	No	No	15	No	No	No
2004	0 - 1	ASYss-028M	13	No	No	No	18	No	No	No
2004	0 - 1	ASYss-029M	9.2	No	No	No	20	No	No	No
2004	0 - 1	ASYss-030M	10	No	No	No	38	No	No	No
2004	0 - 1	ASYss-031M	12	No	No	No	41	No	No	No
2004	0 - 1	ASYss-032M	11	No	No	No	33	No	No	No
2004	0 - 1	ASYss-033M	8.4	No	No	No	43	No	No	No
2004	0 - 1	ASYss-034M	5.5	No	No	No	16	No	No	No
2010	0 - 1	ASYss-069M	12.2 J	No	No	No	61.1	No	No	No
2010	0 - 1	ASYss-070M	10 J	No	No	No	312 J	No	No	No
2010	0 - 1	ASYss-071M	8	No	No	No	39.8 J	No	No	No
2010	0 - 1	ASYss-072M	7.2 J	No	No	No	79	No	No	No
2010	0 - 1	ASYss-081M	8 J	No	No	No	24.5 J	No	No	No
2010	0 - 1	ASYss-082M	5.5 J	No	No	No	24.9 J	No	No	No

Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)

	Analyte (mg/kg)		**Arsenic**				**Lead**			
	CAS Number		7440-38-2				7439-92-1			
	FWCUG		Concentration	Resident*	Industrial	NGT	Concentration	Resident	Industrial	NGT*
	TR = 1E-05		(mg/kg)	4.25	30	27.8	(mg/kg)	400	800	800
	Background Screening Value		* Residential FWCUG < BSV, therefore BSV is used for screening				*No NGT FWCUG available, therefore Industrial value used			
	Surface		15.4				26.1			
	Subsurface		19.8				19.1			
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Result Exceeds FWCUG?			
2010	0 - 1	ASYss-083M	5 J	No	No	No	29.8 J	No	No	No
2010	0 - 1	ASYss-084M	6.1 J	No	No	No	110 J	No	No	No
2010	0 - 1	ASYss-085M	7.4 J	No	No	No	58.5 J	No	No	No
Inactive Area: Grid ISM Samples										
2010	0 - 1	ASYss-086M	8.5 J	No	No	No	25.3 J	No	No	No
2010	0 - 1	ASYss-087M	8.5 J	No	No	No	21 J	No	No	No
2010	0 - 1	ASYss-090M	7.7 J	No	No	No	25.6 J	No	No	No
2010	0 - 1	ASYss-091M	9.1 J	No	No	No	26.5 J	No	No	No
2010	0 - 1	ASYss-092M	8.3 J	No	No	No	22.6 J	No	No	No
2010	0 - 1	ASYss-095M	9.9	No	No	No	25.1 J	No	No	No
2010	0 - 1	ASYss-096M	7.9 J	No	No	No	19.4 J	No	No	No
2010	0 - 1	ASYss-097M	8.2	No	No	No	24.8 J	No	No	No
2010	0 - 1	ASYss-098M	8.4	No	No	No	39.2 J	No	No	No
2010	0 - 1	ASYss-099M	8.6	No	No	No	15.3 J	No	No	No
2010	0 - 1	ASYss-100M	6.6	No	No	No	18.5 J	No	No	No
2010	0 - 1	ASYss-101M	6.3	No	No	No	21.2 J	No	No	No
2010	0 - 1	ASYss-102M	4.6	No	No	No	16.2 J	No	No	No
2010	0 - 1	ASYss-103M	9.8 J	No	No	No	23.6 J	No	No	No
Inactive Area: Discrete Samples										
2010	0 - 1	ASYsb-045	6.6 J	No	No	No	21.3 J	No	No	No
2010	0 - 1	ASYsb-050	5.5 J	No	No	No	13.3 J	No	No	No
2010	0 - 1	ASYsb-052	13.4	No	No	No	12.7 J	No	No	No
2010	0 - 1	ASYsb-053	9.8 J	No	No	No	15.7 J	No	No	No
2010	0 - 1	ASYsb-054	10.1	No	No	No	13.1 J	No	No	No
2010	0 - 1	ASYsb-056	4.9 J	No	No	No	59.3 J	No	No	No
2010	0 - 1	ASYsb-057	8 J	No	No	No	21.4 J	No	No	No
2010	0 - 1	ASYsb-058	6.8 J	No	No	No	13 J	No	No	No
2010	0 - 1	ASYsb-059	4.4	No	No	No	60.1 J	No	No	No
2010	0 - 1	ASYsb-060	6.7	No	No	No	10.2 J	No	No	No
2010	0 - 1	ASYsb-061	12.5	No	No	No	20.5 J	No	No	No
2010	0 - 1	ASYsb-062	10.8	No	No	No	12.9 J	No	No	No
2010	0 - 1	ASYsb-063	13.5 J	No	No	No	16.9 J	No	No	No
2010	0 - 1	ASYsb-064	9.7	No	No	No	**3570 J**	**Yes**	**Yes**	**Yes**
2010	0 - 1	ASYsb-065	5.9 J	No	No	No	37.4 J	No	No	No
Active Storage Area: Discrete Samples SUBSURFACE										
2010	1 - 4	ASYsb-046	20.2 J	Yes	No	No	16.1 J	No	No	No

Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)

	Analyte (mg/kg)		**Arsenic**				**Lead**			
	CAS Number		7440-38-2				7439-92-1			
	FWCUG		Concentration	Resident*	Industrial	NGT	Concentration	Resident	Industrial	NGT*
	TR = 1E-05		(mg/kg)	4.25	30	27.8	(mg/kg)	400	800	800
	Background Screening Value		* Residential FWCUG < BSV, therefore BSV is used for screening				*No NGT FWCUG available, therefore Industrial value used			
	Surface		15.4				26.1			
	Subsurface		19.8				19.1			
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Result Exceeds FWCUG?			
2010	4 - 7	ASYsb-046	15.3 J	No	No	No	13.7 J	No	No	No
2010	1 - 4	ASYsb-047	13.9 J	No	No	No	12.6 J	No	No	No
2010	4 - 7	ASYsb-047	9.3 J	No	No	No	8.7 J	No	No	No
2010	1 - 4	ASYsb-048	9.8 J	No	No	No	11.7 J	No	No	No
2010	4 - 7	ASYsb-048	14.9 J	No	No	No	11.6 J	No	No	No
2010	1 - 4	ASYsb-049	9.8 J	No	No	No	11.4 J	No	No	No
2010	4 - 7	ASYsb-049	13 J	No	No	No	10.9 J	No	No	No
2010	7 - 13	ASYsb-049	13.7 J	No	No	No	10.6 J	No	No	No
2010	8 - 10	ASYsb-049	NR				NR			
Inactive Area: Discrete Samples SUBSURFACE										
2010	1 - 4	ASYsb-045	15.9 J	No	No	No	13.6 J	No	No	No
2010	4 - 7	ASYsb-045	14.3 J	No	No	No	12 J	No	No	No
2010	7 - 13	ASYsb-045	11.4 J	No	No	No	8.4 J	No	No	No
2010	1 - 4	ASYsb-050	10.6 J	No	No	No	13 J	No	No	No
2010	4 - 7	ASYsb-050	16.7 J	No	No	No	13.6 J	No	No	No
2010	1 - 4	ASYsb-052	16.4	No	No	No	14.7 J	No	No	No
2010	4 - 7	ASYsb-052	14 J	No	No	No	11.7	No	No	No
2010	1 - 4	ASYsb-053	13.8 J	No	No	No	11.2 J	No	No	No
2010	4 - 7	ASYsb-053	16.6 J	No	No	No	12.8 J	No	No	No
2010	1 - 4	ASYsb-054	16.3	No	No	No	14.7 J	No	No	No
2010	4 - 7	ASYsb-054	13.4 J	No	No	No	11	No	No	No
2010	1 - 4	ASYsb-056	7.1 J	No	No	No	12.6 J	No	No	No
2010	4 - 7	ASYsb-056	13.5 J	No	No	No	11.8 J	No	No	No
2010	1 - 4	ASYsb-057	20.8 J	Yes	No	No	14.8 J	No	No	No
2010	4 - 7	ASYsb-057	15.8 J	No	No	No	12.6 J	No	No	No
2010	1 - 4	ASYsb-058	18 J	No	No	No	13.8 J	No	No	No
2010	4 - 7	ASYsb-058	19.7 J	No	No	No	13.6 J	No	No	No
2010	1 - 4	ASYsb-059	25.2	Yes	No	No	16.2 J	No	No	No
2010	4 - 7	ASYsb-059	14.6	No	No	No	9.5	No	No	No
2010	7 - 13	ASYsb-059	14	No	No	No	11.6 J	No	No	No
2010	1 - 4	ASYsb-060	11.6	No	No	No	12 J	No	No	No
2010	4 - 7	ASYsb-060	14.3	No	No	No	11.2	No	No	No
2010	1 - 4	ASYsb-061	14.9	No	No	No	13.5 J	No	No	No
2010	4 - 7	ASYsb-061	14.4	No	No	No	10.7	No	No	No
2010	1 - 4	ASYsb-062	19.1	No	No	No	10.8 J	No	No	No
2010	4 - 7	ASYsb-062	16	No	No	No	12.1	No	No	No
2010	1 - 4	ASYsb-063	14.5 J	No	No	No	13.9 J	No	No	No

Table 7-7. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Arsenic and Lead (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)

	Analyte (mg/kg)		**Arsenic**				**Lead**			
	CAS Number		7440-38-2				7439-92-1			
	FWCUG		Concentration	Resident*	Industrial	NGT	Concentration	Resident	Industrial	NGT*
	TR = 1E-05		(mg/kg)	4.25	30	27.8	(mg/kg)	400	800	800
	Background Screening Value		* Residential FWCUG < BSV, therefore BSV is used for screening				*No NGT FWCUG available, therefore Industrial value used			
	Surface		15.4				26.1			
	Subsurface		19.8				19.1			
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Result Exceeds FWCUG?			
2010	4 - 7	ASYsb-063	7.8 J	No	No	No	12.2 J	No	No	No
2010	1 - 4	ASYsb-064	9.4	No	No	No	18.4 J	No	No	No
2010	4 - 7	ASYsb-064	18.1	No	No	No	33	No	No	No
2010	1 - 4	ASYsb-065	3.8 J	No	No	No	12.5 J	No	No	No
2010	4 - 7	ASYsb-065	4.7 J	No	No	No	15.8	No	No	No

Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds Residential FWCUG (2,927 mg/kg) and subsurface soil BSV (3,030 mg/kg).
Exceeds Surface Soil BSV (1,450 mg/kg): 1,450 mg/kg < Sample < 2,927 mg/kg
Less than Surface Soil BSV (1,450 mg/kg)

	Analyte (mg/kg)		**Manganese**				
	CAS Number		7439-96-5				
	FWCUG		Concentration	Resident	Industrial	NGT	
	HQ =1		(mg/kg)	2,927	26,000	351*	
	Background Screening Value (BSV)		*NGT FWCUG < BSV, therefore BSV (1450 mg/kg) is used for screening				
	Surface		1450				
	Subsurface		3030				
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Location and Potential Source Areas
Active Storage Area: Source Area ISM Samples							
2010	0 - 1	ASYss-077M	1390	No	No	No	
2010	0 - 1	ASYss-078M	**3330**	**Yes**	No	**Yes**	Railroad Ties Pile and Railroad Ballast Pile #1 ASYss-088M
2010	0 - 1	ASYss-079M	**3180**	**Yes**	No	**Yes**	
2010	0 - 1	ASYss-080M	**1930**	No	No	**Yes**	
2011	0 - 1	ASYss-123M	**3040**	**Yes**	No	**Yes**	Roadside in ASYss-093M
2011	0 - 1	ASYss-111M	1250	No	No	No	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile ASYss-088M, -093M
2011	0 - 1	ASYss-112M	924	No	No	No	
2011	0 - 1	ASYss-113M	939	No	No	No	
2011	0 - 1	ASYss-114M	1260	No	No	No	
2011	0 - 1	ASYss-120M	**1950**	No	No	**Yes**	
2011	0 - 1	ASYss-122M	**1480**	No	No	**Yes**	
2011	0 - 1	ASYss-116M	**2220**	No	No	**Yes**	Slag and Asphalt Parking Area ASYss-088M, -089M
2011	0 - 1	ASYss-117M	**2030**	No	No	**Yes**	
2011	0 - 1	ASYss-118M	**1760**	No	No	**Yes**	
2011	0 - 1	ASYss-119M	1170	No	No	No	
2004	0 - 1	ASYss-002M	1400	No	No	No	
2010	0 - 1	ASYss-073M	1210	No	No	No	Concrete Footers Pile ASYss-093M, -094M
2010	0 - 1	ASYss-074M	817	No	No	No	
2010	0 - 1	ASYss-075M	898	No	No	No	
2010	0 - 1	ASYss-076M	1400	No	No	No	
2011	0 - 1	ASYss-115M	**2130**	No	No	**Yes**	Soil Pile in ASYss-088M
2011	0 - 1	ASYss-121M	**2420**	No	No	**Yes**	Remainder of ASYss-088M
2011	0 - 1	ASYss-124M	**1610**	No	No	**Yes**	Remainder of ASYss-089M
2011	0 - 1	ASYss-125M	948	No	No	No	Remainder of ASYss-093M
2011	0 - 1	ASYss-126M	1110	No	No	No	Roadside ditch in ASYss-093M
Active Storage Area: Grid ISM Samples							
2010	0 - 1	ASYss-088M	**1610**	No	No	**Yes**	Area completely resampled using smaller source area ISMs listed above
2010	0 - 1	ASYss-089M	1010	No	No	No	
2010	0 - 1	ASYss-093M	846	No	No	No	
2010	0 - 1	ASYss-094M	891	No	No	No	

Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds Residential FWCUG (2,927 mg/kg) and subsurface soil BSV (3,030 mg/kg).
Exceeds Surface Soil BSV (1,450 mg/kg): 1,450 mg/kg < Sample < 2,927 mg/kg
Less than Surface Soil BSV (1,450 mg/kg)

	Analyte (mg/kg)		**Manganese**				
	CAS Number		7439-96-5				
	FWCUG		Concentration	Resident	Industrial	NGT	
	HQ =1		(mg/kg)	2,927	26,000	351*	
	Background Screening Value (BSV)		*NGT FWCUG < BSV, therefore BSV (1450 mg/kg) is used for screening				
	Surface		1450				
	Subsurface		3030				
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Location and Potential Source Areas
Active Storage Area: Discrete Samples							
2010	0 - 1	ASYsb-046	**3410**	**Yes**	No	**Yes**	at ASYss-079m, -080M, -088M
2010	0 - 1	ASYsb-047	**1920**	No	No	**Yes**	at ASYss-75M, -094M
2010	0 - 1	ASYsb-048	**2460**	No	No	**Yes**	at ASYss-119M, -089M
2010	0 - 1	ASYsb-049	**1760**	No	No	**Yes**	Service Station in ASYss-094M
Inactive Area: Source Area ISM Samples							
2010	0 - 1	ASYss-084M	**3600**	Yes	No	**Yes**	
2010	0 - 1	ASYss-081M	**1790**	No	No	**Yes**	Building T-4703 (Storage Shed), T-4704 (Electrical Transmission Salvage Material Storage), Former staging area for Reinforced Concrete Culvert (RCC) pipes.
2010	0 - 1	ASYss-082M	**2500**	No	No	**Yes**	
2010	0 - 1	ASYss-083M	914	No	No	No	
2010	0 - 1	ASYss-085M	1010	No	No	No	
2004	0 - 1	ASYss-005M	1000	No	No	No	
2004	0 - 1	ASYss-006M	**2200**	No	No	**Yes**	
2004	0 - 1	ASYss-007M	760	No	No	No	
2004	0 - 1	ASYss-008M	1400	No	No	No	
2004	0 - 1	ASYss-009M	250	No	No	No	
2004	0 - 1	ASYss-010M	730	No	No	No	
2004	0 - 1	ASYss-011M	520	No	No	No	
2004	0 - 1	ASYss-012M	700	No	No	No	
2004	0 - 1	ASYss-013M	**1900**	No	No	**Yes**	
2004	0 - 1	ASYss-014M	710	No	No	No	
2004	0 - 1	ASYss-015M	360	No	No	No	
2004	0 - 1	ASYss-016M	450	No	No	No	
2004	0 - 1	ASYss-017M	1300	No	No	No	
2004	0 - 1	ASYss-018M	1300	No	No	No	
2004	0 - 1	ASYss-019M	470	No	No	No	
2004	0 - 1	ASYss-020M	580	No	No	No	
2004	0 - 1	ASYss-021M	450	No	No	No	
2004	0 - 1	ASYss-022M	570	No	No	No	
2004	0 - 1	ASYss-023M	330	No	No	No	
2004	0 - 1	ASYss-025M	730	No	No	No	

Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds Residential FWCUG (2,927 mg/kg) and subsurface soil BSV (3,030 mg/kg).
Exceeds Surface Soil BSV (1,450 mg/kg): 1,450 mg/kg < Sample < 2,927 mg/kg
Less than Surface Soil BSV (1,450 mg/kg)

	Analyte (mg/kg)		**Manganese**				Location and Potential Source Areas
	CAS Number		7439-96-5				
	FWCUG		Concentration	Resident	Industrial	NGT	
	HQ =1		(mg/kg)	2,927	26,000	351*	
	Background Screening Value (BSV)		*NGT FWCUG < BSV, therefore BSV (1450 mg/kg) is used for screening				
	Surface		1450				
	Subsurface		3030				
Date	Depth (ft)	Station	Result Exceeds FWCUG?				
2004	0 - 1	ASYss-026M	220	No	No	No	
2004	0 - 1	ASYss-027M	340	No	No	No	
2004	0 - 1	ASYss-028M	340	No	No	No	
2004	0 - 1	ASYss-029M	95	No	No	No	
2004	0 - 1	ASYss-030M	160	No	No	No	
2004	0 - 1	ASYss-031M	940	No	No	No	
2004	0 - 1	ASYss-032M	**1700**	No	No	**Yes**	
2004	0 - 1	ASYss-033M	570	No	No	No	
2004	0 - 1	ASYss-034M	440	No	No	No	
2010	0 - 1	ASYss-069M	**1600**	No	No	**Yes**	
2010	0 - 1	ASYss-070M	258	No	No	No	
2010	0 - 1	ASYss-071M	1000	No	No	No	
2010	0 - 1	ASYss-072M	630	No	No	No	
Inactive Area: Grid ISM Samples							
2010	0 - 1	ASYss-086M	837	No	No	No	
2010	0 - 1	ASYss-087M	594	No	No	No	
2010	0 - 1	ASYss-090M	658	No	No	No	
2010	0 - 1	ASYss-091M	714	No	No	No	
2010	0 - 1	ASYss-095M	901	No	No	No	
2010	0 - 1	ASYss-096M	455	No	No	No	
2010	0 - 1	ASYss-103M	314	No	No	No	
2010	0 - 1	ASYss-101M	476	No	No	No	
2010	0 - 1	ASYss-092M	510	No	No	No	
2010	0 - 1	ASYss-097M	723	No	No	No	
2010	0 - 1	ASYss-098M	415	No	No	No	
2010	0 - 1	ASYss-099M	662	No	No	No	
2010	0 - 1	ASYss-100M	487	No	No	No	
2010	0 - 1	ASYss-102M	178	No	No	No	

Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds Residential FWCUG (2,927 mg/kg) and subsurface soil BSV (3,030 mg/kg).
Exceeds Surface Soil BSV (1,450 mg/kg): 1,450 mg/kg < Sample < 2,927 mg/kg
Less than Surface Soil BSV (1,450 mg/kg)

	Analyte (mg/kg)		**Manganese**				
	CAS Number		7439-96-5				
	FWCUG		Concentration	Resident	Industrial	NGT	
	HQ =1		(mg/kg)	2,927	26,000	351*	
	Background Screening Value (BSV)		*NGT FWCUG < BSV, therefore BSV (1450 mg/kg) is used for screening				
	Surface		1450				
	Subsurface		3030				
Date	Depth (ft)	Station	Result Exceeds FWCUG?				Location and Potential Source Areas
Inactive Area: Discrete Samples							
2010	0 - 1	ASYsb-059	**5480**	**Yes**	No	**Yes**	Building T-19 (Fire Station, Roads and Grounds Equipment Storage) in ASYss-013M
2010	0 - 1	ASYsb-045	**1670**	No	No	**Yes**	
2010	0 - 1	ASYsb-050	232	No	No	No	
2010	0 - 1	ASYsb-052	106	No	No	No	
2010	0 - 1	ASYsb-053	115	No	No	No	
2010	0 - 1	ASYsb-054	201	No	No	No	
2010	0 - 1	ASYsb-056	1040	No	No	No	
2010	0 - 1	ASYsb-057	**1460**	No	No	**Yes**	
2010	0 - 1	ASYsb-058	110	No	No	No	
2010	0 - 1	ASYsb-060	47.1	No	No	No	
2010	0 - 1	ASYsb-061	291	No	No	No	
2010	0 - 1	ASYsb-062	120	No	No	No	
2010	0 - 1	ASYsb-063	367	No	No	No	
2010	0 - 1	ASYsb-064	1180	No	No	No	
2010	0 - 1	ASYsb-065	297	No	No	No	
Active Storage Area: Discrete Samples SUBSURFACE							
2010	1 - 4	ASYsb-046	463	No	No	No	
2010	4 - 7	ASYsb-046	906	No	No	No	
2010	1 - 4	ASYsb-047	171	No	No	No	
2010	4 - 7	ASYsb-047	280	No	No	No	
2010	1 - 4	ASYsb-048	1010	No	No	No	
2010	4 - 7	ASYsb-048	469	No	No	No	
2010	1 - 4	ASYsb-049	201	No	No	No	
2010	4 - 7	ASYsb-049	320	No	No	No	
2010	7 - 13	ASYsb-049	271	No	No	No	
2010	8 - 10	ASYsb-049	NR				
Inactive Area: Discrete Samples SUBSURFACE							
2010	1 - 4	ASYsb-045	170	No	No	No	
2010	4 - 7	ASYsb-045	384	No	No	No	
2010	7 - 13	ASYsb-045	272	No	No	No	

Table 7-8. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Manganese (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds Residential FWCUG (2,927 mg/kg) and subsurface soil BSV (3,030 mg/kg).
Exceeds Surface Soil BSV (1,450 mg/kg): 1,450 mg/kg < Sample < 2,927 mg/kg
Less than Surface Soil BSV (1,450 mg/kg)

	Analyte (mg/kg)		**Manganese**				
	CAS Number		7439-96-5				
	FWCUG		Concentration	Resident	Industrial	NGT	
	HQ =1		(mg/kg)	2,927	26,000	351*	
	Background Screening Value (BSV)		*NGT FWCUG < BSV, therefore BSV (1450 mg/kg) is used for screening				
	Surface		1450				
	Subsurface		3030				
Date	Depth (ft)	Station	Result	Exceeds FWCUG?			Location and Potential Source Areas
2010	1 - 4	ASYsb-050	421	No	No	No	
2010	4 - 7	ASYsb-050	698	No	No	No	
2010	1 - 4	ASYsb-052	330	No	No	No	
2010	4 - 7	ASYsb-052	411	No	No	No	
2010	1 - 4	ASYsb-053	347	No	No	No	
2010	4 - 7	ASYsb-053	369	No	No	No	
2010	1 - 4	ASYsb-054	302	No	No	No	
2010	4 - 7	ASYsb-054	376	No	No	No	
2010	1 - 4	ASYsb-056	456	No	No	No	
2010	4 - 7	ASYsb-056	337	No	No	No	
2010	1 - 4	ASYsb-057	401	No	No	No	
2010	4 - 7	ASYsb-057	437	No	No	No	
2010	1 - 4	ASYsb-058	740	No	No	No	
2010	4 - 7	ASYsb-058	383	No	No	No	
2010	1 - 4	ASYsb-059	2010	No	No	No	
2010	4 - 7	ASYsb-059	354	No	No	No	
2010	7 - 13	ASYsb-059	355	No	No	No	
2010	1 - 4	ASYsb-060	203	No	No	No	
2010	4 - 7	ASYsb-060	566	No	No	No	
2010	1 - 4	ASYsb-061	304	No	No	No	
2010	4 - 7	ASYsb-061	287	No	No	No	
2010	1 - 4	ASYsb-062	213	No	No	No	
2010	4 - 7	ASYsb-062	590	No	No	No	
2010	1 - 4	ASYsb-063	484	No	No	No	
2010	4 - 7	ASYsb-063	327	No	No	No	
2010	1 - 4	ASYsb-064	209	No	No	No	
2010	4 - 7	ASYsb-064	369	No	No	No	
2010	1 - 4	ASYsb-065	72.1	No	No	No	
2010	4 - 7	ASYsb-065	61.9	No	No	No	

Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds National Guard Trainee FWCUG (4.77 mg/kg) as well as all lower screening levels. Samples > 10 mg/kg shown in red.
Exceeds Industrial/Commercial RSL (2.9 mg/kg): 2.9 mg/kg < Sample < 4.77 mg/kg
Exceeds Ohio VAP and BUSTR generic soil standard (1.1 mg/kg): 1.1 mg/kg < Sample < 2.9mg/kg
Exceeds Residential FWCUG (0.221 mg/kg): 0.221 mg/kg < Sample < 1.1 mg/kg
Less than Residential FWCUG (0.221 mg/kg)

	Analyte (mg/kg)		**Benzo(a)pyrene**					
	CAS Number		50-32-8					
	FWCUG		Concentration	Resident	Ohio VAP/BUSTR	Industrial	NGT	
		TR = 1E-05	(mg/kg)	0.221	1.1	2.9	4.77	
Date	Depth (ft)	Station	Result Exceeds FWCUG?					Location and Potential Source Areas
Active Storage Area: Source Area ISM Samples								
2010	0 - 1	ASYss-077M	**12**	**Yes**	**Yes**	**Yes**	**Yes**	**ASY-088M** Railroad Ties Pile and Railroad Ballast Pile #1 ASYss-088M
2010	0 - 1	ASYss-078M	**19**	**Yes**	**Yes**	**Yes**	**Yes**	
2010	0 - 1	ASYss-079M	**2.5**	**Yes**	**Yes**	No	No	
2010	0 - 1	ASYss-080M	**20**	**Yes**	**Yes**	**Yes**	**Yes**	
2011	0 - 1	ASYss-111M	**1.4**	**Yes**	**Yes**	No	No	**ASY-088M** Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in ASYss-088M
2011	0 - 1	ASYss-115M	**0.56**	**Yes**	No	No	No	**ASY-088M** Soil Pile in ASYss-088M
2011	0 - 1	ASYss-121M	**3.1**J	**Yes**	**Yes**	**Yes**	No	**ASY-088M** Remainder of ASYss-088M
2011	0 - 1	ASYss-116M	**8.3**	**Yes**	**Yes**	**Yes**	**Yes**	**ASY-088M** Slag and Asphalt Parking Area in ASYss-088M
2011	0 - 1	ASYss-117M	**5.1**	**Yes**	**Yes**	**Yes**	**Yes**	
2011	0 - 1	ASYss-119M	**5.4**J	**Yes**	**Yes**	**Yes**	**Yes**	**ASY-088M** Slag and Asphalt Parking Area in ASYss-088M and ASYss-089M
2011	0 - 1	ASYss-118M	**14**J	**Yes**	**Yes**	**Yes**	**Yes**	**089M** Slag and Asphalt Parking Area in ASYss-089M
2011	0 - 1	ASYss-124M	**3.1**J	**Yes**	**Yes**	**Yes**	No	**089M** Remainder of ASYss-089M
2011	0 - 1	ASYss-112M	**0.72**	**Yes**	No	No	No	**ASY-093M** Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in ASYss-093M
2011	0 - 1	ASYss-113M	**1.1**	**Yes**	No	No	No	
2011	0 - 1	ASYss-114M	**1.6**	**Yes**	**Yes**	No	No	
2011	0 - 1	ASYss-120M	**1.7**J	**Yes**	**Yes**	No	No	
2011	0 - 1	ASYss-122M	**3.5**J	**Yes**	**Yes**	**Yes**	No	
2011	0 - 1	ASYss-123M	**4.5**J	**Yes**	**Yes**	**Yes**	No	**ASY-093M** Roadside in ASYss-093M
2011	0 - 1	ASYss-126M	**50**J	**Yes**	**Yes**	**Yes**	**Yes**	**ASY-093M** Roadside ditch in ASYss-093M
2011	0 - 1	ASYss-125M	0.12J	No	No	No	No	**ASY-093M** Remainder of ASYss-093M
2010	0 - 1	ASYss-076M	**7.3**	**Yes**	**Yes**	**Yes**	**Yes**	**094M** Concrete Footers Pile in ASYss-093M and ASY-094M
2010	0 - 1	ASYss-073M	**2.5**	**Yes**	**Yes**	No	No	
2010	0 - 1	ASYss-075M	**3.1**	**Yes**	**Yes**	**Yes**	No	
2010	0 - 1	ASYss-074M	**3.3**	**Yes**	**Yes**	**Yes**	No	

Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds National Guard Trainee FWCUG (4.77 mg/kg) as well as all lower screening levels. Samples > 10 mg/kg shown in red.
Exceeds Industrial/Commercial RSL (2.9 mg/kg): 2.9 mg/kg < Sample < 4.77 mg/kg
Exceeds Ohio VAP and BUSTR generic soil standard (1.1 mg/kg): 1.1 mg/kg < Sample < 2.9mg/kg
Exceeds Residential FWCUG (0.221 mg/kg): 0.221 mg/kg < Sample < 1.1 mg/kg
Less than Residential FWCUG (0.221 mg/kg)

	Analyte (mg/kg)			**Benzo(a)pyrene**				
	CAS Number			50-32-8				
	FWCUG		Concentration (mg/kg)	Resident	Ohio VAP/BUSTR	Industrial	NGT	
	TR = 1E-05			0.221	1.1	2.9	4.77	
Date	Depth (ft)	Station	Result Exceeds FWCUG?					Location and Potential Source Areas
Active Storage Area: Grid ISM Samples								
2010	0 - 1	ASYss-088M	**9**	**Yes**	**Yes**	**Yes**	**Yes**	Area completely resampled using smaller source area ISMs listed above
2010	0 - 1	ASYss-089M	**4.8**	**Yes**	**Yes**	**Yes**	**Yes**	
2010	0 - 1	ASYss-093M	**18**	**Yes**	**Yes**	**Yes**	**Yes**	
2010	0 - 1	ASYss-094M	0.08	No	No	No	No	
Active Storage Area: Discrete Samples								
2010	0 - 1	ASYsb-046	**0.28**	**Yes**	No	No	No	at ASYss-079m, -080M, -088M
2010	0 - 1	ASYsb-047	**2.5**	**Yes**	**Yes**	No	No	at ASYss-75M, -094M
2010	0 - 1	ASYsb-048	**4.5**	**Yes**	**Yes**	**Yes**	No	at ASYss-119M, -089M
2010	0 - 1	ASYsb-049	**0.24**	**Yes**	No	No	No	Service Station in ASYss-094M
Inactive Area: Source Area ISM Samples								
2004	0 - 1	ASYss-015M	**1.1J**	**Yes**	No	No	No	Buildings T-13 (Workmen's Sheds), T-14 (Offices, Roads and Grounds Equipment Storage), T-16 (Blacksmith Shop, Roads and Grounds Equipment Storage), T-20 (Tool Crib)
2010	0 - 1	ASYss-071M	**4.4**	**Yes**	**Yes**	**Yes**	No	
2010	0 - 1	ASYss-069M	**1.7**	**Yes**	**Yes**	No	No	Building T-7 (Dormitory), T-19 (Fire Station, Roads and Grounds Equipment Storage)
2004	0 - 1	ASYss-027M	**0.32**	**Yes**	No	No	No	Ditch at Eastern Perimeter of AOC
2010	0 - 1	ASYss-081M	**0.51**	**Yes**	No	No	No	Building T-4703 (Storage Shed), T-4704 (Electrical Transmission Salvage Material Storage), Former staging area for Reinforced Concrete Culvert (RCC) pipes.
2010	0 - 1	ASYss-082M	**0.35**	**Yes**	No	No	No	
2010	0 - 1	ASYss-083M	**0.87**	**Yes**	No	No	No	
2010	0 - 1	ASYss-084M	**1.1**	**Yes**	No	No	No	
2010	0 - 1	ASYss-085M	**0.58**	**Yes**	No	No	No	
2004	0 - 1	ASYss-011M	0.1	No	No	No	No	
2010	0 - 1	ASYss-070M	0.02	No	No	No	No	
2010	0 - 1	ASYss-072M	0.13J	No	No	No	No	

Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds National Guard Trainee FWCUG (4.77 mg/kg) as well as all lower screening levels. Samples > 10 mg/kg shown in red.
Exceeds Industrial/Commercial RSL (2.9 mg/kg): 2.9 mg/kg < Sample < 4.77 mg/kg
Exceeds Ohio VAP and BUSTR generic soil standard (1.1 mg/kg): 1.1 mg/kg < Sample < 2.9mg/kg
Exceeds Residential FWCUG (0.221 mg/kg): 0.221 mg/kg < Sample < 1.1 mg/kg
Less than Residential FWCUG (0.221 mg/kg)

Date	Analyte (mg/kg)			**Benzo(a)pyrene**				Location and Potential Source Areas
	CAS Number			50-32-8				
	FWCUG		Concentration (mg/kg)	Resident	Ohio VAP/BUSTR	Industrial	NGT	
		TR = 1E-05		0.221	1.1	2.9	4.77	
	Depth (ft)	Station	Result Exceeds FWCUG?					
Inactive Area: Grid ISM Samples								
2010	0 - 1	ASYss-086M	**0.42**	**Yes**	No	No	No	Buildings T-2, T-3, T-4 (offices), T-5 (Field Hospital), T-6 (Materials Testing Laboratory), T-7, T-8, T-9, T-10, T-11, T-21 (Dormitories), T-12 (Cafeteria), T-13 (Workmen's Sheds), T-17 (offices), T-14, T-16, T-18, T-19 (Offices, blacksmith shop, Roads and Grounds Equipment Storage), T-20 (Tool Crib)
2010	0 - 1	ASYss-087M	0.06	No	No	No	No	
2010	0 - 1	ASYss-090M	**0.29**	**Yes**	No	No	No	
2010	0 - 1	ASYss-091M	0.17	No	No	No	No	
2010	0 - 1	ASYss-095M	**0.83**	**Yes**	No	No	No	
2010	0 - 1	ASYss-096M	0.22	No	No	No	No	
2010	0 - 1	ASYss-103M	0.13	No	No	No	No	
2010	0 - 1	ASYss-092M	0.03	No	No	No	No	
2010	0 - 1	ASYss-097M	0.22	No	No	No	No	
2010	0 - 1	ASYss-098M	**0.34**	**Yes**	No	No	No	Former Skating Pond, Former Drain Field
2010	0 - 1	ASYss-099M	**0.47**	**Yes**	No	No	No	
2010	0 - 1	ASYss-100M	**0.4**	**Yes**	No	No	No	Former Staging Area for "Chipped Boxes", Central Parking Lot, Railroad Ballast Pile #2
2010	0 - 1	ASYss-101M	**1.4J**	**Yes**	**Yes**	No	No	Buildings T-23 (Commissary), T-25 (Truck Grease Rack)
2010	0 - 1	ASYss-102M	**0.24**	**Yes**	No	No	No	
Inactive Area: Discrete Samples								
2010	0 - 1	ASYsb-059	**0.87**	**Yes**	No	No	No	Building T-19 (Fire Station, Roads and Grounds Equipment Storage)
2010	0 - 1	ASYsb-063	**0.27**	**Yes**	No	No	No	Ditch at Eastern Perimeter of AOC in ASYss-027M
2010	0 - 1	ASYsb-045	0.05	No	No	No	No	
2010	0 - 1	ASYsb-050	<0.01U	No	No	No	No	
2010	0 - 1	ASYsb-052	0.03	No	No	No	No	
2010	0 - 1	ASYsb-053	0.03	No	No	No	No	
2010	0 - 1	ASYsb-054	0.04J	No	No	No	No	
2010	0 - 1	ASYsb-056	0.11	No	No	No	No	
2010	0 - 1	ASYsb-057	0.04J	No	No	No	No	
2010	0 - 1	ASYsb-058	<0.01U	No	No	No	No	
2010	0 - 1	ASYsb-060	<0.01U	No	No	No	No	
2010	0 - 1	ASYsb-061	<0.01U	No	No	No	No	
2010	0 - 1	ASYsb-062	0.11	No	No	No	No	

Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds National Guard Trainee FWCUG (4.77 mg/kg) as well as all lower screening levels. Samples > 10 mg/kg shown in red.
Exceeds Industrial/Commercial RSL (2.9 mg/kg): 2.9 mg/kg < Sample < 4.77 mg/kg
Exceeds Ohio VAP and BUSTR generic soil standard (1.1 mg/kg): 1.1 mg/kg < Sample < 2.9mg/kg
Exceeds Residential FWCUG (0.221 mg/kg): 0.221 mg/kg < Sample < 1.1 mg/kg
Less than Residential FWCUG (0.221 mg/kg)

	Analyte (mg/kg)			**Benzo(a)pyrene**				
	CAS Number			50-32-8				
	FWCUG		Concentration (mg/kg)	Resident	Ohio VAP/BUSTR	Industrial	NGT	
	TR = 1E-05			0.221	1.1	2.9	4.77	
Date	Depth (ft)	Station		Result Exceeds FWCUG?				Location and Potential Source Areas
Active Storage Area: Grid ISM Samples								
2010	0 - 1	ASYsb-064	0.02	No	No	No	No	
2010	0 - 1	ASYsb-065	0.07	No	No	No	No	
Active Storage Area: Discrete Samples SUBSURFACE								
2010	1 - 4	ASYsb-046	<0.07U	No	No	No	No	
2010	4 - 7	ASYsb-046	<0.06U	No	No	No	No	
2010	1 - 4	ASYsb-047	<0.01UJ	No	No	No	No	
2010	4 - 7	ASYsb-047	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-048	0.04	No	No	No	No	
2010	4 - 7	ASYsb-048	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-049	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-049	<0.01U	No	No	No	No	
2010	7 - 13	ASYsb-049	<0.01U	No	No	No	No	
2010	8 - 10	ASYsb-049	<0.06U	No	No	No	No	
Inactive Area: Discrete Samples SUBSURFACE								
2010	1 - 4	ASYsb-045	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-045	<0.01U	No	No	No	No	
2010	7 - 13	ASYsb-045	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-050	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-050	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-052	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-052	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-053	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-053	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-054	<0.06U	No	No	No	No	
2010	4 - 7	ASYsb-054	<0.06U	No	No	No	No	
2010	1 - 4	ASYsb-056	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-056	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-057	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-057	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-058	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-058	<0.01U	No	No	No	No	

Table 7-9. Results of all Soil Data (Surface ISM, Surface Discrete, and Subsurface Discrete) Compared to Residential FWCUG, Industrial/Commercial RSLs, National Guard Trainee FWCUGs, and Background Screening Values for Benzo(a)pyrene (continued)

Samples are aggregated in the table by:
Area - Active Storage Area and Inactive Area
Type - Source Area (small) ISM samples, Grid (multi-acre) ISM samples, and discrete samples
Depth - Surface Soil (0-1 ft bgs) and Subsurface Soil (> 1 ft bgs)
Sample results exceeding one or more screening level are highlighted to correspond with sample colors shown on accompanying map.

Exceeds National Guard Trainee FWCUG (4.77 mg/kg) as well as all lower screening levels. Samples > 10 mg/kg shown in red.
Exceeds Industrial/Commercial RSL (2.9 mg/kg): 2.9 mg/kg < Sample < 4.77 mg/kg
Exceeds Ohio VAP and BUSTR generic soil standard (1.1 mg/kg): 1.1 mg/kg < Sample < 2.9mg/kg
Exceeds Residential FWCUG (0.221 mg/kg): 0.221 mg/kg < Sample < 1.1 mg/kg
Less than Residential FWCUG (0.221 mg/kg)

	Analyte (mg/kg)			**Benzo(a)pyrene**				
	CAS Number			50-32-8				
	FWCUG		Concentration (mg/kg)	Resident	Ohio VAP/BUSTR	Industrial	NGT	
		TR = 1E-05		0.221	1.1	2.9	4.77	
Date	Depth (ft)	Station	Result Exceeds FWCUG?					Location and Potential Source Areas
Active Storage Area: Grid ISM Samples								
2010	1 - 4	ASYsb-059	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-059	<0.01U	No	No	No	No	
2010	7 - 13	ASYsb-059	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-060	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-060	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-061	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-061	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-062	<0.06U	No	No	No	No	
2010	4 - 7	ASYsb-062	<0.06U	No	No	No	No	
2010	1 - 4	ASYsb-063	**0.43**	**Yes**	No	No	No	Ditch at Eastern Perimeter of AOC in ASYss-027M
2010	4 - 7	ASYsb-063	0.01	No	No	No	No	
2010	1 - 4	ASYsb-064	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-064	<0.01U	No	No	No	No	
2010	1 - 4	ASYsb-065	<0.01U	No	No	No	No	
2010	4 - 7	ASYsb-065	<0.01U	No	No	No	No	

THIS PAGE INTENTIONALLY LEFT BLANK.

Table 7-10. Surface Soil COCs for Commercial/Industrial Land Use

Chemical of Concern	RSL[a] (mg/kg)	Sample Location	Location and Potential Source Area
Active Storage Area: Source Area ISM Samples			
PAHs		ASYss-077M	Railroad Ties Pile and Railroad Ballast Pile #1 Grid Area ASYss-088M
		ASYss-078M	
		ASYss-079M[b]	
		ASYss-080M	
Benzo(a)anthracene	29	ASYss-121M	Remainder of Grid Area ASYss-088M
Benzo(a)pyrene	2.9	ASYss-116M	Slag and Asphalt Parking Area in Grid Area ASYss-088M
Benzo(b)fluoranthene	29	ASYss-117M	
Dibenz(a,h)anthracene	2.9	ASYss-119M	Slag and Asphalt Parking Area in Grid Area ASYss-088M and ASYss-089M
		ASYss-118M	Slag and Asphalt Parking Area in Grid Area ASYss-089M
		ASYss-124M	Remainder of Grid Area ASYss-089M
		ASYss-122M	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in Grid Area ASYss-093M
		ASYss-123M	Roadside in Grid Area ASYss-093M
		ASYss-126M	Roadside ditch in Grid Area ASYss-093M
		ASYss-076M	Concrete Footers Pile in Grid Area ASYss-093M and ASYss-094M
		ASYss-075M	
		ASYss-074M	
Inactive Area: Source Area ISM Samples			
Lead	800	ASYss-019M	Former Incinerator

[a]USEPA Industrial Regional Screening Levels (RSL) adjusted to a target risk of 1E-05.
[b]Reported concentrations of all individual chemicals are less than RSLs; however sum-of-ratios is greater than 1.

Table 7-11. Surface Soil COCs for Military Training Land Use

Chemical of Concern	FWCUG[a] (mg/kg)	Sample Location	Location and Potential Source Area
Active Storage Area: Source Area ISM Samples			
PAHs		ASYss-077M	Railroad Ties Pile and Railroad Ballast Pile #1 Grid Area ASYss-088M
		ASYss-078M	
		ASYss-080M	
Benzo(a)anthracene	47.7	ASYss-116M	Slag and Asphalt Parking Area in Grid Area ASYss-088M
Benzo(a)pyrene	4.77	ASYss-117M	
Benzo(b)fluoranthene	47.7	ASYss-119M	Slag and Asphalt Parking Area in Grid Area ASYss-088M and ASYss-089M
Dibenz(a,h)anthracene	4.77	ASYss-118M	Slag and Asphalt Parking Area in Grid Area ASYss-089M
		ASYss-126M	Roadside ditch in Grid Area ASYss-093M
		ASYss-076M	Concrete Footers Pile in Grid Area ASYss-093M and ASYss-094M
Inactive Area: Source Area ISM Samples			
Lead	800[b]	ASYss-019M	Former Incinerator

[a]Facility-wide Clean-up Goals (FWCUG) corresponding to a target risk of 1E-05 for National Guard Trainee from Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant (USACE 2010a).
[b]No FWCUG available. Value is the USEPA Industrial Regional Screening Level.

Table 7-12. Environmental Concentrations of PAHs Measured in Background Surface Soil Samples at RVAAP

Analyte	Frequency of Detection		Reported Concentration[a] (mg/kg)	
			Minimum	Maximum
Acenaphthene	1/ 15	7%	0.88	0.88
Acenaphthylene	1/15	7%	0.07	0.07
Anthracene	2/15	13%	0.12	1
Benz(a)anthracene	10/15	67%	0.044	4.1
Benzo(a)pyrene	8/15	53%	0.058	3.7
Benzo(b)fluoranthene	10/15	67%	0.062	4.8
Benzo(g,h,i)perylene	6/15	40%	0.046	1.3
Benzo(k)fluoranthene	6/15	40%	0.053	2.6
Chrysene	10/15	67%	0.057	4
Dibenz(a,h)anthracene	2/15	13%	0.11	0.37
Indeno(1,2,3-cd)pyrene	5/15	33%	0.054	1.5

[a]Phase II Remedial Investigation Report for Winklepeck Burning Grounds (USACE 2001b).
mg/kg = Milligram per kilogram.

Table 7-13. Concentrations of Benz(a)anthracene, Benzo(a)pyrene, Benzo(b)fluoranthene, and Dibenz(a,h)anthracene in Soil from Various Environmental Studies

Study	Number of Samples	Geometric Mean or Median	Minimum	95th Percentile[a]	Maximum
Benz(a)anthracene					
CA/T Project[b]	872	0.33	0.045	19	250
LSPA Project[b]	490	0.563	ND	--	796
Watertown[b]	17	0.411	0.021	6.04	6.05
Worcester[b]	68	--	ND	3.8	15
New England[c]	62	0.672	ND	1.86	15
Illinois[d] Urban	--	--	--	1.8	--
Illinois[d] Rural	--	--	--	0.72	--
ATSDR[e] Urban	--	--	0.169	--	59
ATSDR[e] Rural	--	--	0.005	--	0.02
ATSDR[e] Agricultural	--	--	0.056	--	0.11
NYSDEC Rural Near Roads[f]	28	--	ND	1.2	2.9
NYSDEC Rural Distant Roads[f]	118	--	ND	0.16	2.6
Benzo(a)pyrene					
CA/T Project[b]	873	0.3	0.031	17	230
LSPA Project[b]	489	0.44	ND	--	222
Watertown[b]	17	0.95	0.6	4.77	6.08
Worcester[b]	67	--	ND	3.3	9.7
New England[c]	62	0.686	ND	1.82	13
Illinois[d] Urban	--	--	--	2.1	--
Illinois[d] Rural	--	--	--	0.98	--
ATSDR[e] Urban	--	--	0.165	--	0.22
ATSDR[e] Rural	--	--	0.002	--	1.3
ATSDR[e] Agricultural	--	--	0.0046	--	0.9
NYSDEC Rural Near Roads[f]	28	--	ND	1.1	2.4
NYSDEC Rural Distant Roads[f]	118	--	ND	0.12	3.4
Benzo(b)fluoranthene					
CA/T Project[b]	873	0.68	0.045	18	270
LSPA Project[b]	486	--	ND	--	250
Watertown[b]	17	1.4	0.6	6.79	7.08

Table 7-13. Concentrations of Benz(a)anthracene, Benzo(a)pyrene, Benzo(b)fluoranthene, and Dibenz(a,h)anthracene in Soil from Environmental Studies (continued)

Study	Number of Samples	Geometric Mean or Median	Minimum	95th Percentile[a]	Maximum
Worcester[b]	--	--	--	--	--
New England[c]	62	0.722	ND	1.97	12
Illinois[d] Urban	--	--	--	2	--
Illinois[d] Rural	--	--	--	0.7	--
ATSDR[e] Urban	--	--	15	--	62
ATSDR[e] Rural	--	--	0.02	--	0.03
ATSDR[e] Agricultural	--	--	0.058	--	0.22
NYSDEC Rural Near Roads[f]	28	--	ND	1.2	3.3
NYSDEC Rural Distant Roads[f]	118	--	ND	0.36	4.6
Dibenz(a,h)anthracene					
CA/T Project[b]	866	0.17	0.045	2.1	39
LSPA Project[b]	--	--	--	--	--
Watertown[b]	17	0.195	0.155	0.604	0.64
Worcester[b]	68	--	ND	--	1.6
New England[c]	62	0.245	ND	--	2.9
Illinois[d] Urban	--	--	--	0.42	--
Illinois[d] Rural	--	--	--	0.15	--
ATSDR[e]	--	--	--	--	--
NYSDEC Rural Near Roads[f]	28	--	--	--	--
NYSDEC Rural Distant Roads[f]	118	--	ND	--	0.23

[a] Lognormal 95th percentile value for all studies except: (1) New England value is 95% upper confidence limit and (2) NYSDEC values are distribution-free 95th percentile.

[b] Data reported by Massachusetts Department of Environmental Protection (MADEP 2002) are from the following datasets:
CA/T = Data collected by Mass Highway Department as part of the Central Artery/Tunnel (CA/T) project.
LSPA = Preliminary data compiled by the Massachusetts Licensed Site professional Association (LSPA) from data submitted by its members in 2001.
Water Town and Worcester Site-specific samples.

[c] Data from three New England locations from Bradley et al. 1994.

[d] Concentrations of PAHs in Illinois metropolitan statistical areas (urban) and non-metropolitan statistical areas (rural) as reported by Illinois EPA (IEPA 2005).

[e] Data published by the Agency for Toxic Substances and Disease Registry (ATSDR) in Polycyclic Aromatic Hydrocarbons (PAHs) August 1995.

[f] Distribution-free 95th percentile values for near roads (less than 10 ft from roads and pavement) and not near roads (more than 15 ft from roads and pavement) from New York State Brownfield Cleanup program Development of Soil Cleanup Objectives Technical Support Document (September 2006), Appendix D.

ND = Not detected.
NYSDEC = New York State Department of Environmental Conservation.
-- = No value reported for this source.

Table 7-14. Surface Soil ISM Sample Locations Having COCs

Unrestricted (Residential) Land Use	Industrial Land Use	Military Training Land Use	Location and Potential Source Area
ISM Sample locations[a] where one or more PAHs[b] identified as COCs at the Active Storage Area			
ASYss-077M	ASYss-077M	ASYss-077M	Railroad Ties Pile and Railroad Ballast Pile #1 Grid Area ASYss-088M
ASYss-078M	ASYss-078M	ASYss-078M	
ASYss-079M	ASYss-079M	--	
ASYss-080M	ASYss-080M	ASYss-080M	
ASYss-111M	--	--	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in Grid Area ASYss-088M
ASYss-115M	--	--	Soil Pile in Grid Area ASYss-088M
ASYss-121M	ASYss-121M	--	Remainder of Grid Area ASYss-088M
ASYss-116M	ASYss-116M	ASYss-116M	Slag and Asphalt Parking Area in Grid Area ASYss-088M
ASYss-117M	ASYss-117M	ASYss-117M	
ASYss-119M	ASYss-119M	ASYss-119M	Slag and Asphalt Parking Area in Grid Area ASYss-088M and ASYss-089M
ASYss-118M	ASYss-118M	ASYss-118M	Slag and Asphalt Parking Area in Grid Area ASYss-089M
ASYss-124M	ASYss-124M	--	Remainder of Grid Area ASYss-089M
ASYss-112M	--	--	Perimeter of RR Tie and Ballast Piles and Concrete Footers Pile in Grid Area ASYss-093M
ASYss-113M	--	--	
ASYss-114M	--	--	
ASYss-120M	--	--	
ASYss-122M	ASYss-122M	--	
ASYss-123M	ASYss-123M	--	Roadside in Grid Area ASYss-093M
ASYss-126M	ASYss-126M	ASYss-126M	Roadside ditch in Grid Area ASYss-093M
ASYss-076M	ASYss-076M	ASYss-076M	Concrete Footers Pile in Grid Area ASYss-093M and ASYss-094M
ASYss-073M	--	--	
ASYss-075M	ASYss-075M	--	
ASYss-074M	ASYss-074M	--	
ISM Sample location where lead is identified as a COC at the Inactive Area			
ASYss-019M	ASYss-019M	ASYss-019M	Former Incinerator

[a]Large ISM grid samples are not listed because the complete area of the Grid Samples is characterized by the source area ISM samples.

[b]PAHs identified as COCs include one or more of benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, and dibenz(a,h)anthracene.

-- COCs not identified at this sample location for this receptor.

Table 7-15. Summary of Historical COPECs per the Characterization of 14 AOCs

Group	COPEC	Shallow Soil
Inorganic Chemicals	Aluminum	X
	Arsenic	X
	Barium	X
	Cadmium	X
	Chromium	X
	Copper	X
	Iron	X
	Lead	X
	Manganese	X
	Mercury	X
	Nickel	X
	Selenium	X
	Silver	X
	Zinc	X
Pesticides	Aroclor 1260	X
SVOCs	4-Methylphenol	Q
	Benzo(a)pyrene	X
	Bis(2-ethylhexyl) phthalate	X
	Butylbenzyl phthalate	X
	Dibenzofuran	Q
	Naphthalene	X
Explosives	2-Amino-4,6-dinitrotoluene	Q
	2-Nitrotoluene	Q
	3-Nitrotoluene	Q
Propellants	Nitrocellulose	Q

Adapted from Table ASY-14 from the Characterization of 14 AOCs (MKM 2007)
COPEC = Chemical of Potential Ecological Concern
SVOC = Semi-volatile Organic Compound
Q = Qualitative COPEC, PBT compound or no ESV
X = Quantitative COPEC, exceeds ESV

Table 7-16. Wetlands (OHARNG 2008) at Atlas Scrap Yard

Wetland ID	Wetland Type[a]	Total Wetland Size	ORAM Score	ORAM Category
Wetland 1	PEM1E/PFO1E	0.5 acre	49	2
Wetland 2	PEM1E/PSS1E	0.05 acre	29	1
Wetland 3	PFO1E	0.05 acre	33	2
Wetland 4	PEM1E	0.03 acre	19	1
Wetland 5	PSS1E	0.45 acre	25	1
Wetland 6	PFO1E	3.35 acres	37	2
Wetland 7	PEM1E	0.39 acre	29	1
Wetland 8	PFO1E	2.1 acres	43	2
Wetland 9	PFO1E	0.9 acre	42	2

[a] Cowardin Classification: PEM1E = palustrine, persistent emergent, seasonally flooded/saturated; PSS1E = palustrine, broad-leaved deciduous, scrub-shrub, seasonally flooded/saturated; PFO1E = palustrine, broad-leaved deciduous, forested, seasonally flooded/saturated.
ID = Identification.
ORAM = Ohio Rapid Assessment Method.

Table 7-17. Survey of Various Ecological Resources in Proximity to the AOC

Natural Resource	Inside Habitat Area	Near the AOC	Distances to Nearest Resources and Comments[a]
Wetlands (planning level survey and jurisdictional)	Five medium-quality (Category 2) wetlands and four low-quality (Category 1) wetlands	Many other wetlands are in vicinity of AOC (Figure 7-4)	Many other wetlands are in vicinity of AOC (Figure 7-4)
State-listed or federally listed species	No known sightings	None	Nearest occurrence 400 ft north of AOC. Additional state-listed species occurred 850 ft to the west of AOC. See text for species names
Beaver dams	None	Three beaver dams are in the vicinity; two dams are east of the AOC within Load Line 12, one dam is north of the AOC	Closest beaver dam is 400 ft east. Other dams are 700 ft east and 700 ft north
100-year floodplain	None	None	Floodplain along tributary to Upper Cobbs Pond approximately 1,500 ft northeast
Stream sampling[b]	None	None	Nearest stream station is at Load Line 4, approximately 2,045 ft southwest on tributary to Mahoning River. Surface water from the AOC does not drain to the Mahoning River watershed where the station is located
Pond sampling[b]	None	None	Nearest pond station is at Load Line 4 Pond 2,000 ft southwest of the AOC. The AOC does not contribute to this pond where the station is located. The nearest downgradient pond station is at Upper Cobbs Pond 3,100 ft northeast of the AOC

[a] Measurements of distance and direction are taken from the nearest boundary of the AOC to the resource being measured.
[b] Stream and pond sampling refers to *Facility-Wide Biological and Water Quality Study 2003* (USACE 2005a).
AOC = Area of Concern.

Table 7-18. Summary of Integrated COPECs for Surface Soil of Entire Atlas Scrap Yard

COPEC	Maximum Concentration (mg/kg)	ESV (mg/kg)	Ratio of Maximum to ESV	Comments
Aluminum	32100	50	642	None
Arsenic	41	18	2.28	None
Cadmium	9.5	0.36	26.39	None
Chromium	64	26	2.46	None
Cobalt	19	13	1.46	None
Copper	200	28	7.14	None
Lead	1200	11	109.09	None
Manganese	3600	220	16.36	None
Mercury	0.64	0.00051	1254.90	PBT Compound
Selenium	2.9	0.52	5.58	None
Silver	5.2	4.2	1.24	None
Zinc	1800	46	39.13	None
2,6-Dinitrotoluene	0.13	0.0328	3.96	None
2-Amino-4,6-dinitrotoluene	0.1	No ESV	--	COPEC because no ESV
2-Nitrotoluene	0.43	No ESV	--	COPEC because no ESV
3-Nitrotoluene	0.12	No ESV	--	COPEC because no ESV
4-Amino-2,6-dinitrotoluene	0.21	No ESV	--	COPEC because no ESV
HMX	0.016	No ESV	--	COPEC because no ESV
Nitrocellulose	4.2	No ESV	--	COPEC because no ESV
Tetryl	0.14	No ESV	--	COPEC because no ESV
Benz(a)anthracene	17	5.21	3.26	None
Benzo(a)pyrene	20	1.52	13.16	None
Bis(2-ethylhexyl)phthalate	1.5	0.925	1.62	None
Carbazole	0.44	No ESV	--	COPEC because no ESV
Chrysene	30	4.73	6.34	None
Dibenzofuran	0.51	No ESV	--	COPEC because no ESV
Naphthalene	1.4	0.0994	14.08	None
PCB-1260	0.17	0.371	0.46	PBT Compound

Table excludes nutrients.
COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
mg/kg = Milligrams per kilogram.
PBT = Persistent, Bioaccumulative, and Toxic.
PCB = Polychlorinated Biphenyl

Table 7-19. Summary of Integrated COPECs for Surface Soil in Wetland ISM Evaluations

Wetland/ Sample ID	COPEC	Concentration (mg/kg)	ESV (mg/kg)	Ratio of Concentration to ESV	Comments
Wetland 1 / (ASYss-098M)	Mercury	0.098	0.00051	192	PBT Compound
Wetland 6/ (ASYss-082M)	Manganese	2,500	220	11.4	None
	Mercury	0.050	0.00051	98	PBT Compound
	Selenium	2.3	0.52	4.4	None
	Naphthalene	0.13	0.0994	1.3	None
Wetland 6/ (ASYss-086M)	Mercury	0.052	0.00051	102	PBT Compound
Wetland 8/ (ASYss-097M)	Mercury	0.074	0.00051	145	PBT Compound
	Nitrocellulose	2.1	No ESV	--	COPEC because no ESV
	Carbazole	0.043	No ESV	--	COPEC because no ESV
	Dibenzofuran	0.026	No ESV	--	COPEC because no ESV
Wetland 9/ (ASYss-092M)	Mercury	0.06	0.00051	117.6	PBT Compound

COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.
ID = Identification.
mg/kg = Milligrams per kilogram.
PBT = Persistent, Bioaccumulative, and Toxic.

Table 7-20. Application and Decisions of Selected Evaluation Factors to Integrated COPECs for Surface Soil from Level II

Action	Condition for Decision to Dismiss or Retain COPEC	Outcome
Compare mean concentration to ESV	(A) Mean concentration smaller than or equal to the ESV	COPEC is not a candidate to be a final COPEC. Evaluation ceased.
	(B) Mean concentration larger than the ESV	Continue evaluation of chemical.
Compare mean concentration above ESV to background concentration	(A) Mean concentration smaller than the background concentration	COPEC is not a candidate to be a final COPEC. Evaluation ceased.
	(B) Mean concentration larger than background concentration	Continue evaluation of chemical.

COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.

Table 7-21. Summary of Data for Step 3A Refinement of Integrated COPECs in Surface Soil at Atlas Scrap Yard

COPEC	Mean Concentration (mg/kg)	ESV (mg/kg)	Mean Concentration > ESV? (Yes/No)	Background Concentration (mg/kg)	Mean Concentration > Background Concentration? (Yes/No)	ESV > Background Concentration? (Yes/No)	Frequency of Detections[a] > ESV	Frequency of Detections[a] > Background Concentration	Further Evaluation in Level II Required? (Yes/No)
COPEC with Mean Concentration < ESV									
Arsenic	9.31	18	No	15.4	No	Yes	2/65	2/65	No
Chromium	22.3	26	No	17.4	Yes	Yes	11/65	46/65	No
Cobalt	6.18	13	No	10.4	No	Yes	2/65	4/65	No
Copper	18.4	28	No	17.7	Yes	No	6/65	14/65	No
Silver	0.482	4.2	No	0	Yes	Yes	2/39	39/39	No
Benz(a)anthracene	2.94	5.21	No	0	Yes	Yes	6/38	38/38	No
Chrysene	4.13	4.73	No	0	Yes	Yes	8/38	38/38	No
COPEC with Mean Concentration > ESV and Mean Concentration < Background Concentration									
Aluminum	13,900	50	Yes	17,700	No	No	65/65	7/65	No
Manganese	964	220	Yes	1450	No	No	61/65	11/65	No
Selenium	1.06	0.52	Yes	1.4	No	No	56/57	9/57	No
COPEC with Mean Concentration > ESV and Mean Concentration > Background Concentration									
Cadmium	0.511	0.36	Yes	0	Yes	Yes	14/58	58/58	Yes
Lead	57	11	Yes	26.1	Yes	No	65/65	24/65	Yes
Mercury	0.0766	0.00051	Yes	0.036	Yes	No	59/59	48/59	Yes
Zinc	116	46	Yes	61.8	Yes	No	55/65	37/65	Yes
2,6-Dinitrotoluene	0.124	0.0328	Yes	0	Yes	Yes	1/1	1/1	Yes
Benzo(a)pyrene	3.1	1.52	Yes	0	Yes	Yes	13/38	38/38	Yes
Bis(2-ethylhexyl)phthalate	0.96	0.925	Yes	0	Yes	Yes	1/3	3/3	Yes
Naphthalene	0.183	0.0994	Yes	0	Yes	Yes	17/37	37/37	Yes

[a] Frequency of detection refers to the subset of detections relative to ESV or background concentration as opposed to the standard frequency of detections of total samples taken.
COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.
mg/kg = Milligrams per kilogram.

Table 7-22. Summary of Mean Concentrations and Background Concentrations of Remaining Integrated Soil COPECs in the Refinement Factors

COPEC	Mean Concentration (mg/kg)	Background Concentration (mg/kg)	Ratio of Mean Concentration to Background Concentration	Qualitative Assessment of Mean to Background Concentration
Surface Soil				
Cadmium	0.511	0	NA	Concentrations are dissimilar
Lead	57	26.1	2.18	Concentrations are somewhat similar
Mercury	0.0766	0.036	2.13	Concentrations are somewhat similar
Zinc	116	61.8	1.88	Concentrations are somewhat similar
Benzo(a)pyrene	3.1	0	NA	Benzo(a)pyrene does not have an established background concentration for RVAAP
Bis(2-ethylhexyl)phthalate	0.96	0	NA	Bis(2-ethylhexyl)phthalate does not have an established background concentration for RVAAP
Naphthalene	0.183	0	NA	Naphthalene does not have an established background concentration for RVAAP

COPEC = Chemical of Potential Ecological Concern.
RVAAP = Ravenna Army Ammunition Plant.
mg/kg = Milligrams per kilogram.
NA = Not available, ratio could not be calculated.

Table 7-23. Comparison of Alternative ESV to Mean Concentration for Remaining Integrated COPECs

COPEC	Background Concentration (mg/kg)	Preferred ESV (mg/kg)	Alternative ESV[a] (mg/kg)	Ratio of Preferred ESV to Mean Concentration	Ratio of Alternative ESV to Mean Concentration
Cadmium	0	0.36	4.0	1.42	0.18
Lead	26.1	11	40.5	5.18	1.41
Mercury	0.036	0.00051	0.1	150.20	0.77
Zinc	61.8	46	79	2.52	1.47
Benzo(a)pyrene	0	1.52	NA	2.04	NA
Bis(2-ethylhexyl)phthalate	0	0.925	NA	1.04	NA
Naphthalene	0	0.0994	NA	1.84	NA

[a] The Alternative ESV is the ESV with the closest concentration to the preferred ESV that is above the background concentration.
COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.
mg/kg = Milligrams per kilogram.
NA = Not available, ratio could not be calculated.

Table 7-24. Summary of Integrated COPECs for Discrete* Surface Soil

COPEC	Maximum Concentration (mg/kg)	ESV (mg/kg)	Ratio of Maximum to ESV	Comments
Aluminum	29000	50	580	None
Antimony	6.1	0.27	22.59	None
Barium	1820	330	5.52	None
Cadmium	3.1	0.36	8.61	None
Chromium	62	26	2.38	None
Cobalt	19.4	13	1.49	None
Copper	370	28	13.21	None
Lead	3570	11	325	None
Manganese	5480	220	24.91	None
Mercury	4.5	0.00051	8,824	PBT Compound
Nickel	39.2	38	1.03	None
Selenium	4.2	0.52	8.08	None
Silver	7.1	4.2	1.69	None
Zinc	1560	46	33.91	None
2,6-Dinitrotoluene	0.56	0.0328	17.07	None
3-Nitrotoluene	0.17	No ESV	No ESV	COPEC because no ESV
4-Amino-2,6-Dinitrotoluene	0.059	No ESV	No ESV	COPEC because no ESV
HMX	0.016	No ESV	No ESV	COPEC because no ESV
Nitrocellulose	1.6	No ESV	No ESV	COPEC because no ESV
PETN	0.065	No ESV	No ESV	COPEC because no ESV
Tetryl	0.051	No ESV	No ESV	COPEC because no ESV
Benzo(a)pyrene	4.5	1.52	2.96	None
Chrysene	5.7	4.73	1.21	None
Naphthalene	3	0.0994	30.18	None

*Discrete surface soil data were used for the nature and extent evaluation and were not used in the ERA. These data are presented for comparison to the results of the ISM data used in the ERA to address uncertainties associated with the outcome of the results for the discrete data versus the ISM data. The ISM data used in the ERA are discussed in Section 7.3.3.4.

Table excludes nutrients.
COPEC = Chemical of Potential Ecological Concern.
ESV = Ecological Screening Value.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
mg/kg = Milligrams per kilogram.
PBT = Persistent, Bioaccumulative, and Toxic.
PETN = Pentaerythritol tetranitrate.

Table 7-25. Comparison of Integrated COPECs for ISM and Discrete Data

COPEC	Integrated COPECs		Maximum Concentration (mg/kg)		Mean Concentration (mg/kg)	
	ISM Data	Discrete Data	ISM Data	Discrete Data	ISM Data	Discrete Data
Aluminum	X	X	32100	29000	13900	15600
Antimony	—	X	—	6.1	—	0.513
Arsenic	X	—	41	—	9.31	—
Barium	—	X	—	1820	—	233
Cadmium	X	X	9.5	3.1	0.511	0.414
Chromium	X	X	64	62	22.3	14.9
Cobalt	X	X	19	19.4	6.18	5.73
Copper	X	X	200	370	18.4	29
Lead	X	X	1200	3570	57	209
Manganese	X	X	3600	5480	964	1170
Mercury	X	X	0.64	4.5	0.0766	0.289
Nickel	—	X	—	39.2	—	12.4
Selenium	X	X	2.9	4.2	1.06	1.78
Silver	X	X	5.2	7.1	0.482	0.539
Zinc	X	X	1800	1560	116	146
2,6-Dinitrotoluene	X	X	0.13	0.56	0.124	0.146
2-Amino-4,6-dinitrotoluene	X	—	0.1	—	0.124	—
2-Nitrotoluene	X	—	0.43	—	0.131	—
3-Nitrotoluene	X	X	0.12	0.17	0.123	0.121
4-Amino-2,6-dinitrotoluene	X	X	0.21	0.059	0.149	0.119
HMX	X	X	0.016	0.016	0.123	0.117
Nitrocellulose	X	X	4.2	1.6	1.98	1.98
PETN	—	X	—	0.065	—	0.236
Tetryl	X	X	0.14	0.051	0.181	0.109
Benz(a)anthracene	X	—	17	—	2.94	—
Benzo(a)pyrene	X	X	20	4.5	3.1	0.483
Bis(2-ethylhexyl) phthalate	X	—	1.5	—	0.96	—
Carbazole	X	—	0.44	—	0.213	—
Chrysene	X	X	30	5.7	4.13	0.597
Dibenzofuran	X	—	0.51	—	0.166	—
Naphthalene	X	X	1.4	3	0.183	0.2
PCB-1260	X	—	0.17	—	0.0428	—

COPEC = Chemical of Potential Ecological Concern.
HMX = Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine.
ISM = Integrated sampling method.
mg/kg = Milligrams per kilogram.
PETN = Pentaerythritol tetranitrate.

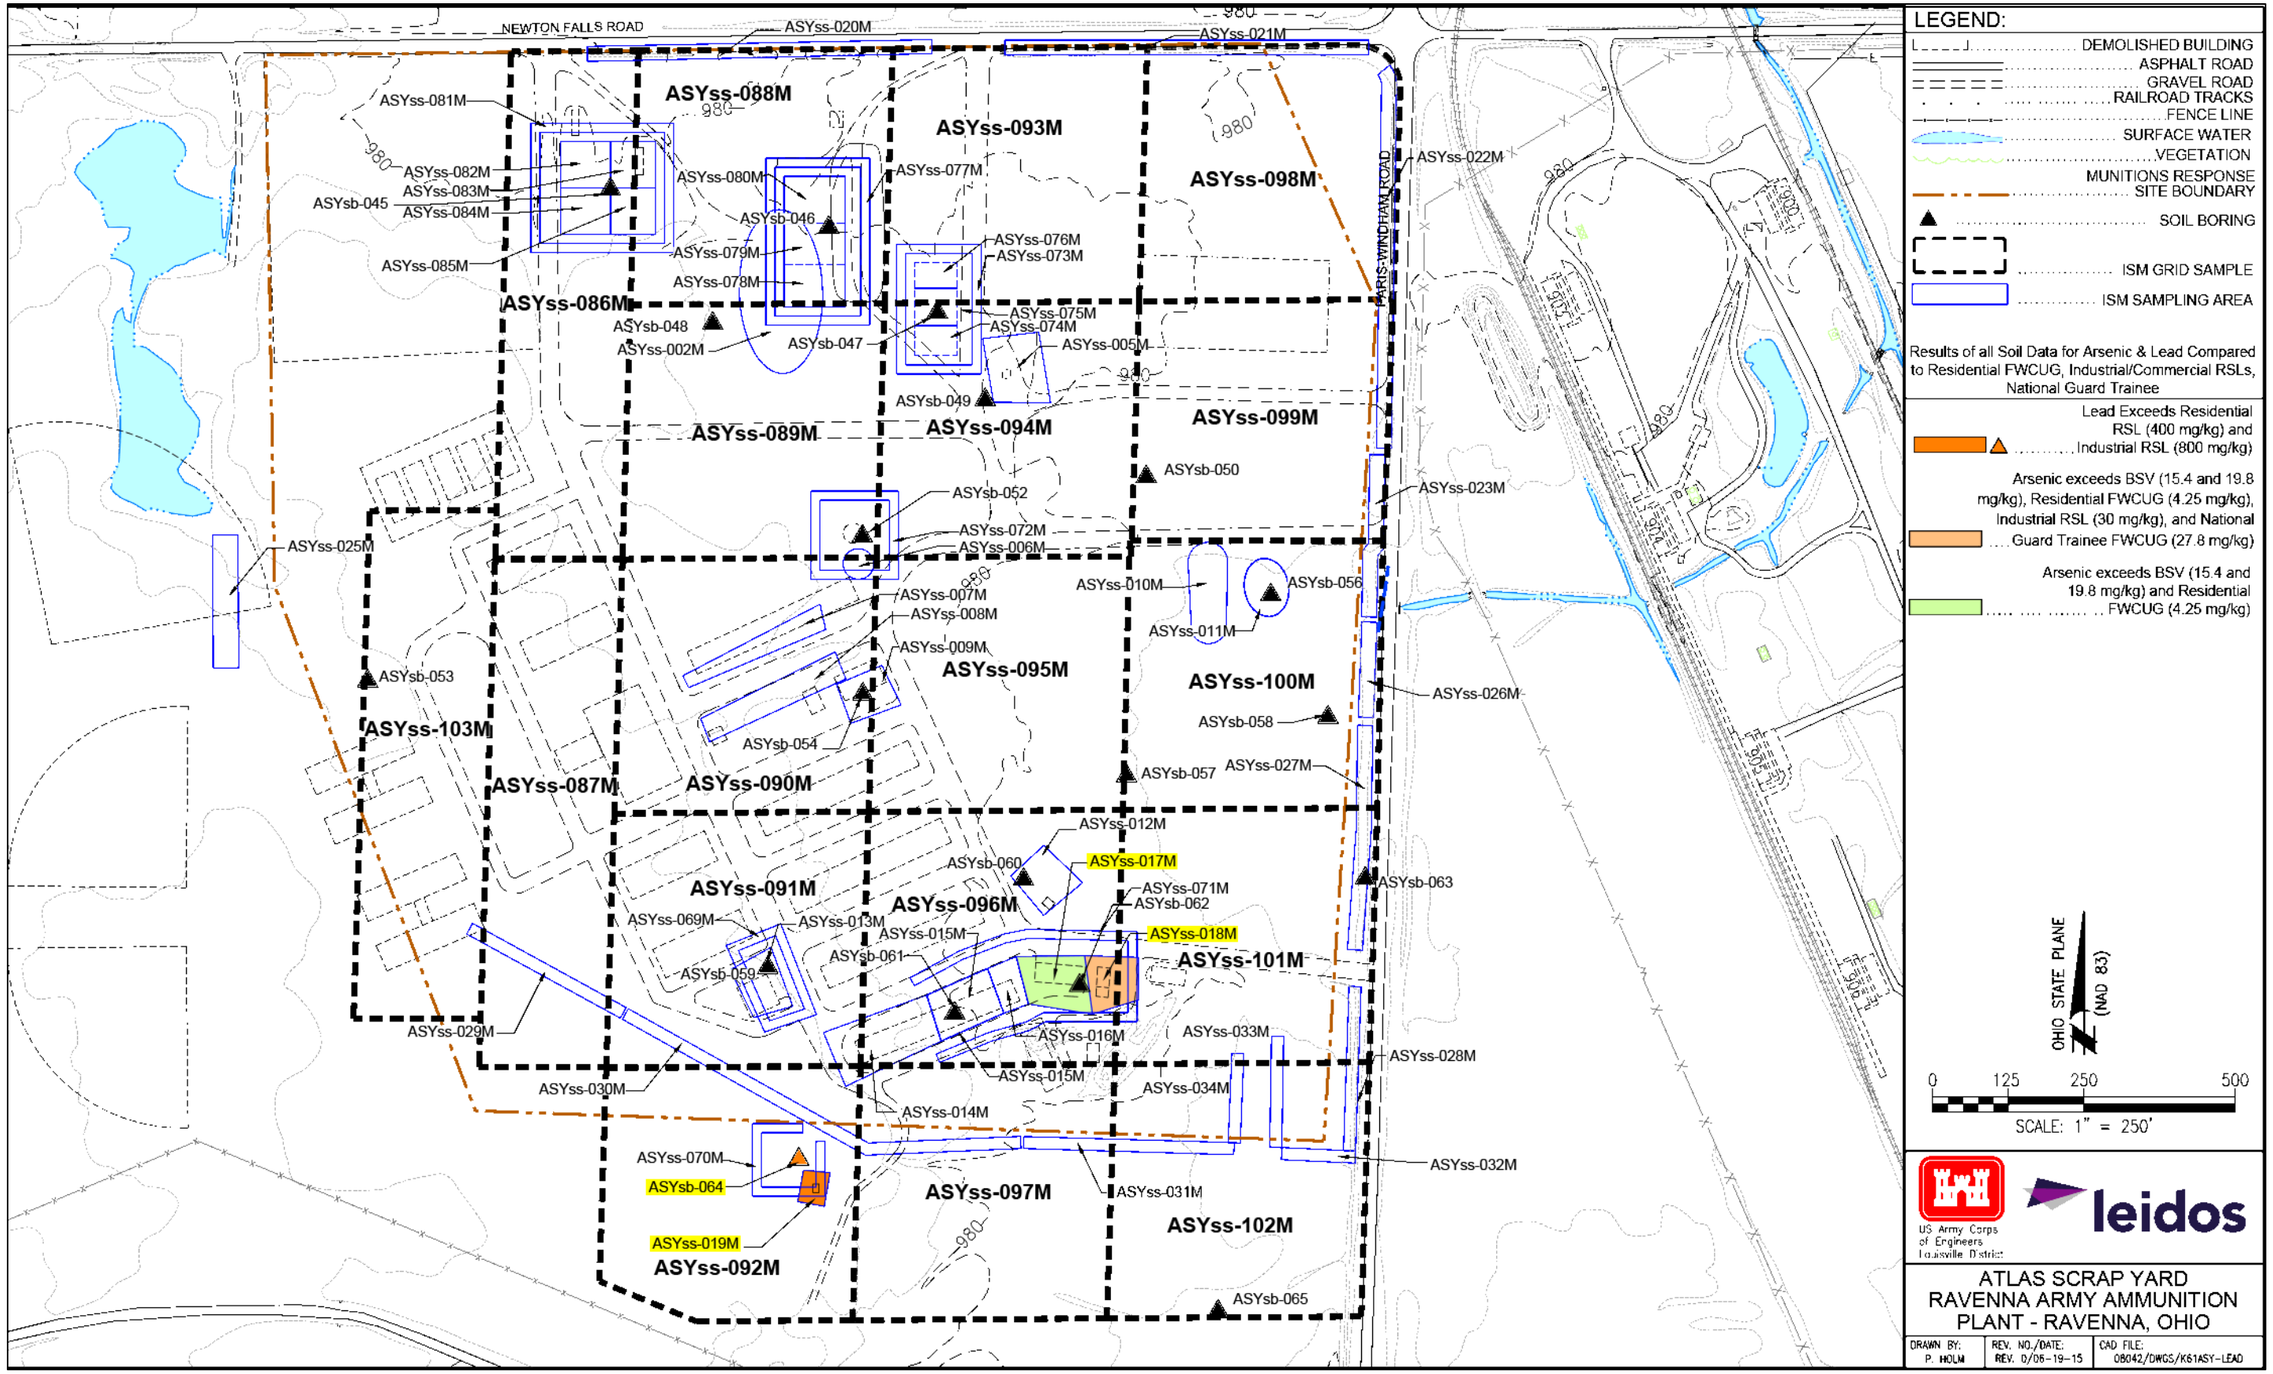


Figure 7–1. Arsenic and Lead Surface Soil Concentrations Comparison to FWCUGs



Figure 7–2. Manganese Surface Soil Concentrations Comparison to FWCUGs



Figure 7–3. Benzopyrene Surface Soil Concentrations Comparision to FWCUGs

THIS PAGE INTENTIONALLY LEFT BLANK

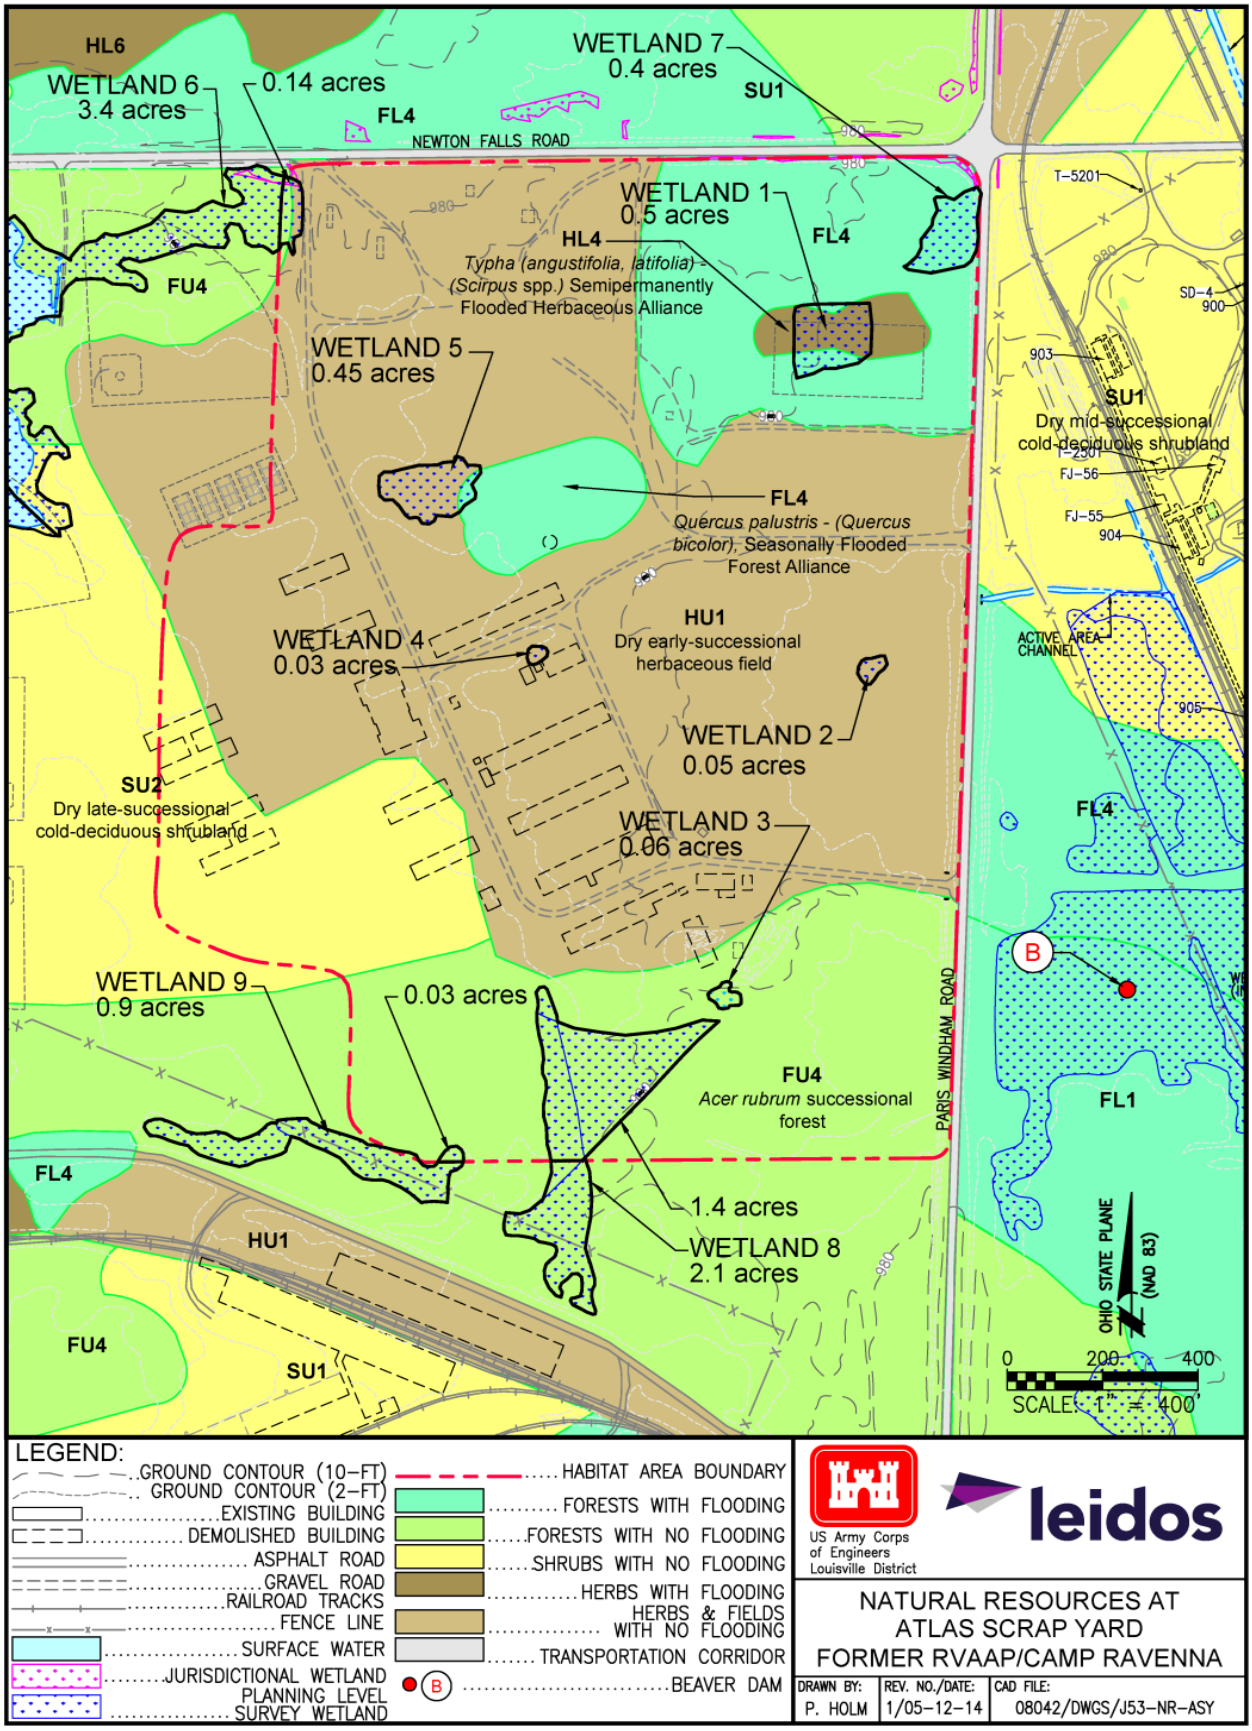


Figure 7–4. Natural Resources (OHARNG 2014) at Atlas Scrap Yard

THIS PAGE INTENTIONALLY LEFT BLANK

8.0 REMEDIAL INVESTIGATION CONCLUSIONS

8.1 INTRODUCTION

This RI Report for Atlas Scrap Yard presents a detailed analysis of historical and newly acquired environmental data. The following sections summarize the major findings of the nature and extent of contamination, modeling of contaminant fate and transport, HHRA, and ERA. An updated CSM incorporating all available information is also presented to integrate results of prior investigations and the PBA08 RI. The CSM denotes, based on available data where source areas occur, the mechanisms for contaminant migration from source areas to receptor media (e.g., surface water and groundwater), exit pathways from the AOC, and if COCs occur that may require further evaluation in an FS. This section presents the need for any further characterization of the media evaluated under the RI phase of work and whether to proceed to the FS phase of the CERCLA RI/FS process.

8.2 SUMMARY OF DATA USED IN THE REMEDIAL INVESTIGATION

Available, quality-assured data for Atlas Scrap Yard represent conditions of the AOC over a span of approximately eight years and were collected using ISM and discrete sampling methods. Data were collected in 2004 during the Characterization of 14 AOCs (MKM 2007) and in 2010 and 2011 as part of the PBA08 RI. Physical conditions at the AOC changed during the time between the 2004 Characterization of 14 AOCs, as the materials present in the Railroad Ballast polygon shown in the Characterization of 14 AOCs appears to have been removed and the AOC in general seemed to have more vegetation. PBA08 RI samples were collected using ISM (surface soil) and discrete (subsurface soil) methods to be consistent with the population of historical samples and allow evaluation of equivalent data.

A systematic process was used to evaluate data usability for the RI Report based on project DQOs, data age and representativeness with respect to current AOC conditions, and sampling methods. The data usability evaluation included a particular focus on whether Characterization of 14 AOCs data represent current conditions and if sample results were appropriately used in the various data evaluations conducted in this report. Section 4.4 presents the results of the data usability evaluation for all available Atlas Scrap Yard samples; a summary is presented below.

All data collected during the Characterization of 14 AOCs and PBA08 RI investigations were deemed usable for this report. Surface soil samples at ASYss-001M, ASYss-003M, ASYss-004M and ASYss-004D were not included in the SRC screening dataset, as these ISM locations were re-sampled in 2010 under the PBA08 RI, and the more recent data were used for SRC screening. The sample results from these locations were used in the nature and extent evaluation only. For surface soil, all other available ISM samples (with the exception of field duplicate samples) were included in the data screening and risk assessments to identify SRCs, contaminant nature and extent, contaminant fate and transport. Discrete surface soil samples associated with ISM samples, which were used for VOC analysis, were also included in all RI evaluations.

Certain surface soil samples were limited to only nature and extent evaluation and analysis of temporal trends. These surface soil sample types, which are not included in quantitative data screening (i.e., identification of SRCs) or risk assessment calculations, included ISM and discrete field duplicate samples from all investigations, discrete samples from PBA08 RI soil borings (0-1 ft bgs interval), and discrete samples collected for chromium speciation analyses.

In April 2011, an additional sampling event was conducted to refine contaminated areas in the ASA, specifically grid ISM locations ASYss-088M, ASYss-089M, ASYss-093M, and ASYss-094M. A total of 16 samples were collected to close any potential data gaps resulting from the samples collected as part of the PBA08 RI in 2010 and the Characterization of 14 AOCs. These sample locations were derived from the features (e.g., railroad ties, concrete rubble) present within the ASA.

For subsurface soil, only PBA08 RI discrete sample data were available and are included (with exception of field duplicate samples) for all evaluations performed in this RI Report. Surface water and sediment samples were not collected within the AOC during the PBA08 RI. Surface water is only present at the AOC during periods of heavy precipitation. Stormwater runoff at Atlas Scrap Yard ultimately discharges to Load Line 12. One sediment sample (ASYsd-024M) was collected during the Characterization of 14 AOCs and one co-located set of sediment and surface water samples (L12sd-308 and L12sw-308) were collected during the PBA08 RI in the ditch east of Atlas Scrap Yard and Paris-Windham Road. The sediment and surface water samples were incorporated into the Atlas Scrap Yard nature and extent evaluation to represent the potential exit point for runoff or surface drainage from the AOC. This sample location is included in the HHRA contained in the *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c).

8.3 SUMMARY OF CONTAMINANT NATURE AND EXTENT

Data from the 2004 Characterization of 14 AOCs, 2010 PBA08 RI, and 2011 PBA08 RI subsequent sampling event provide effective characterization of the nature and extent of the contamination at the AOC. The predominant SRCs in surface and subsurface soil at Atlas Scrap Yard were PAHs, which were observed in all surface soil samples analyzed across the entire AOC. The highest levels of PAHs were identified during the PBA08 RI within the parking areas made up of slag and asphalt gravel used for vehicle traffic and equipment and material staging within the ASA and the ditch paralleling an access road (sample ASYss-126M). Elevated concentrations of PAHs were confined to the surface soil (0–1 ft bgs). A large majority of subsurface samples had nondetectable concentrations of these PAHs.

No explosive contamination was identified by former Building T-6 Materials Testing Laboratory or by the former staging area of 90mm wooden packing boxes. Inorganic chemicals were observed in surface soil at concentrations above their respective background concentrations throughout the AOC. The former incinerator (sample ASYss-019M) had an elevated concentration of lead at 1,200 mg/kg. The contamination appears to be confined to the surface soil, as nearby boring ASYsb-064 had lead concentrations of 18.4J mg/kg from 1–4 ft bgs and 33 mg/kg from 4–7 ft bgs. Any remedial activities

associated with the surface soil at the former incinerator would require confirmation that the contamination is confined to surface soil (0–1 ft bgs).

A limited number of SRCs were observed in subsurface soil, sediment, and surface water, relative to surface soil. Detections of explosives, propellants, VOCs, pesticides, and PCBs were limited in frequency at the AOC.

It is recommended that no further sampling be conducted; however, considerations can be made for evaluating PCBs by former Building T-4704 Roads and Grounds Maintenance Building. Although no releases were documented at this location, additional sampling of the surface soil may be considered.

8.4 SUMMARY OF CONTAMINANT FATE AND TRANSPORT

Contaminant fate and transport evaluation (Section 6.0) included analysis of two contaminant migration pathways: (1) leaching and migration from soil to groundwater; and (2) partitioning contaminants from sediment to surface water within the main drainage ditch exiting the AOC, with transferal to groundwater through surface water/groundwater interaction.

Maximum concentrations of SRCs identified in surface and subsurface soil were evaluated using a series of generic screening steps to identify initial CMCOPCs. These CMCOPCs for soil were further evaluated using the SESOIL model to predict leaching concentrations and identify final CMCOPCs based on RVAAP facility-wide background criteria and the lowest risk-based screening criteria among USEPA MCLs, USEPA tap water RSLs, or RVAAP groundwater FWCUGs for the Resident Receptor Adult. Final CMCOPCs were evaluated using the AT123D model to predict groundwater mixing concentrations beneath source areas and concentrations at the nearest downgradient groundwater receptor locations to the AOC (e.g., streams). Maximum SRC concentrations in sediment were evaluated using an analytical solution to identify final CMCOPCs for evaluation using AT123D. The AT123D modeling results were evaluated with respect to AOC groundwater monitoring data and model limitations and assumptions to identify chemicals to be retained as CMCOCs that may warrant further evaluation in an FS.

Conclusions of the soil and sediment screening, leachate modeling, and groundwater modeling are as follows:

- The AT123D model predicted maximum future groundwater concentrations for the final soil CMCOPCs 2-nitrotoluene; 3-nitrotoluene; 2,6-DNT; 2-amino-4,6-DNT; 4-amino-2,6-DNT; 2-methylnaphthalene; and naphthalene exceed groundwater screening criteria beneath soil source areas but do not exceed groundwater screening criteria at the downgradient receptor locations [i.e., unnamed tributary to Sand Creek (flowing northwest) and unnamed tributary to the Mahoning River (flowing southwest)]. Predicted groundwater concentrations of the final sediment CMCOPCs barium; chromium; copper; lead; mercury; selenium; 2-amino-4,6-DNT; benz(a)anthracene; benzo(a)pyrene; benzo(b)fluoranthene; dibenz(a,h)anthracene; indeno(1,2,3-cd)pyrene; and naphthalene

also do not exceed groundwater screening criteria at the downgradient receptor location [unnamed tributary to Cobbs Ponds (flowing northeast)].

- Evaluation of modeling results with respect to current AOC groundwater data and model limitations indicate that identified CMCOPCs are not impacting groundwater beneath the source areas and that modeling assumptions are conservative. Evaluation of predicted breakthrough curves show peak concentrations for sediment CMCOPCs and for four soil CMCOPCs (nitrotoluene; 3-nitrotoluene; 2-amino-4,6-DNT; and 4-amino-2,6-DNT) would have occurred in the past. Potential future impacts predicted by the model for remaining CMCOPCs would likely be mitigated by factors such as chemical and biological degradation, lateral dispersivity, and AOC-specific variations in soil geochemistry.

All SRCs identified in the surface soil, subsurface soil, and sediment at Atlas Scrap Yard were evaluated through the stepwise fate and transport evaluation. All SRCs were eliminated as posing future impacts to groundwater, and NFA is recommended for surface soil, subsurface soil, and sediment to protect groundwater.

8.5 SUMMARY AND CONCLUSIONS OF THE HUMAN HEALTH RISK ASSESSMENT

The HHRA identified COCs and conducted risk management analysis to identify COCs requiring potential remediation based on potential risks to human receptors. Camp Ravenna is a controlled access facility. Atlas Scrap Yard is located in the central portion of the facility and is currently used for storing railroad ties and salvaged inert materials. Three Land Uses for the RVAAP restoration program are specified in the Technical Memorandum (ARNG 2014) for consideration in the RI along with their Representative Receptors. Unrestricted (Residential) Land Use [Resident Receptor (Adult and Child)] is considered protective for all three Land Uses at Camp Ravenna. Therefore, if an AOC meets the requirements for Unrestricted (Residential) Land Use, then the AOC is also considered to have met the requirements of the other Land Uses (i.e., Commercial/Industrial and Military Training). Commercial/Industrial Land Use (Industrial Receptor) is considered protective of all uses other than Residential. Military Training Land Use is represented by the National Guard Trainee. All three Land Uses [i.e., Unrestricted (Residential) Land Use, Military Training Land Use, and Commercial/Industrial Land Use] are evaluated in this HHRA.

Media of concern at Atlas Scrap Yard are surface soil and subsurface soil. Soil at Atlas Scrap Yard was evaluated in two EUs. The ASA occupies the north-central portion of the AOC and was historically used for stockpiling a variety of bulk materials. This area is currently used for storing salvaged inert materials, including railroad ties, concrete, and brick. The IA makes up the remainder of Atlas Scrap Yard, outside the ASA. Within these two EUs (ASA and IA) Individual ISM results were compared directly to the surface soil FWCUGs for the Atlas Scrap Yard receptors. Surface water and sediment samples were not collected within the AOC during the PBA08 RI, as perennial surface water bodies are not present at the AOC. Stormwater runoff at Atlas Scrap Yard discharges to Load Line 12. Surface water and sediment samples collected from the ditch east of Atlas Scrap Yard along Paris-Windham Road represent the potential exit point for runoff or surface drainage from the

AOC. The *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12* (USACE 2010c) contains a risk assessment that evaluates this location.

Five PAHs [benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, and dibenz(a,h)anthracene] were identified as COCs at the ASA for all three Land Use scenarios. The extent of contamination exceeding screening levels varies by receptor [i.e., a larger area is considered contaminated for Unrestricted (Residential) Land Use than for Commercial/Industrial Land Use]. Contamination is limited surface soil (0–1 ft bgs) and no COCs were identified in subsurface soil. At the ASA, PAHs are present at high concentrations due to sources such as traffic on roads and parking areas made up of slag and asphalt gravel, and storage of railroad ties and ballast. The slag/asphalt gravel parking area is the primary source of PAHs. The ASA has been utilized as a stockpile storage area for bulk material, including gravel, railroad ballasts, sand, culvert pipe, railroad ties, and telephone poles. This north central portion of Atlas Scrap Yard is still actively utilized for ongoing materials storage, including concrete footers. The highest concentrations of PAHs are reported for samples collected from a slag/gravel/crushed asphalt parking area adjacent to the railroad tie storage pile and the drainage ditch paralleling the north/south road and collecting runoff from the road and parking and storage areas. Concentrations of these PAHs exceed cleanup goals associated with the Resident Receptor, Industrial Receptor, and National Guard Trainee. Therefore, these PAHs are identified as COCs for all three Land Uses at the ASA and require evaluation of remedial alternatives.

At the IA, lead was identified as the only COC requiring remediation. Lead at the location of the former incinerator (sample ASY-019M) had an elevated concentration of lead at 1,200 mg/kg. This concentration exceeds cleanup goals associated with the Resident Receptor, Industrial Receptor, and National Guard Trainee; therefore, this location requires remediation to be protective of all three Land Use scenarios. This risk associated with this location appears to be confined to the surface soil, as nearby boring ASYsb-064 had lead concentrations of 18.4 J mg/kg from 1–4 ft bgs and 33 mg/kg from 4–7 ft bgs, well below any applicable cleanup goals. However, any remedial activities associated with surface soil at the former incinerator would require confirmation that the contamination is confined to surface soil (0–1 ft bgs).

PAHs are present at the IA but at much lower concentrations than at the ASA and are associated with gravel roads and parking areas, including traffic on the main entrance to Atlas Scrap Yard. PAH concentrations at the IA are similar to those reported from normal urban and traffic sources and do not represent a release. Consequently, these PAHs do not require evaluation of remedial alternatives at the IA.

8.6 SUMMARY AND CONCLUSIONS OF THE ECOLOGICAL RISK ASSESSMENT

There is chemical contamination present in soil at Atlas Scrap Yard. This contamination was identified using historical and PBA08 RI data. Wetlands are important and significant ecological resources near contamination in the AOC. These findings invoked a Level II assessment.

The Level II assessment evaluated soil data and identified COPECs. There are 28 integrated COPECs for soil at Atlas Scrap Yard. Aluminum; arsenic; cadmium; chromium; cobalt; copper; lead;

manganese; mercury; selenium; silver; zinc; 2,6-DNT; benz(a)anthracene; benzo(a)pyrene; bis(2-ethylhexyl)phthalate; chrysene; and naphthalene are the 18 integrated COPECs that exceeded their background concentrations and ESVs. Nine chemicals (2-amino-4,6-DNT; 2-nitrotoluene; 3-nitrotoluene; 4-amino-2,6-DNT; HMX; nitrocellulose; tetryl; carbazole; and dibenzofuran) are integrated COPECs because they did not have an ESV. Mercury and PCB-1260 are PBT compounds.

The integrated soil COPECs were further evaluated with technical and refinement factors in Step 3A. The factors in Step 3A showed there are no integrated COPECs that are of ecological concern requiring remediation or further evaluation. In addition, based on their ORAM category, size, and location, Wetlands 1, 6, 8, and 9 were evaluated using individual ISM samples representative of the wetland or the area between the wetland and potential source areas. Based on the limited exceedances in these individual ISM samples, significant releases from the source areas at Atlas Scrap Yard to the wetlands have not occurred. Consequently, the ERA for Atlas Scrap Yard can conclude with Level II and NFA from the ecological perspective.

8.7 UPDATED CONCEPTUAL SITE MODEL

The CSM is updated in this section to incorporate results of the PBA08 RI. Elements of the CSM include:

- Primary and secondary contaminant sources and release mechanisms;
- Contaminant migration pathways and discharge or exit points;
- Potential receptors with unacceptable risk; and
- Data gaps and uncertainties.

The following sections describe each of the above elements of the CSM for Atlas Scrap Yard, and the CSM is presented on Figure 8-1. In addition, figures contained in earlier sections of the report that illustrate AOC features, topography, groundwater and surface water flow directions, and nature and extent of SRCs are cited to assist in visualizing key summary points of the revised CSM.

8.7.1 Primary and Secondary Contaminant Sources and Release Mechanisms

The parking areas made up of slag and asphalt gravel are the primary contributing contaminant source still present at the AOC. The highest levels of PAHs were identified during the PBA08 RI within the areas of the northern slag parking area used for vehicle traffic and equipment and material staging within the ASA. The ditch sample (ASYss-126M), collected from the east side of the access road in the ASA, contains the highest concentrations of PAHs. Overland flow during precipitation events carries contamination particulates from the access road and debris piles and accumulates in the ditch, as evidenced by the concentrations observed from the ditch sample. Samples collected immediately adjacent to debris piles did not contain the highest concentrations of PAH contamination; therefore, the debris piles are not considered to be as significant of a contributor to contamination as the slag parking area.

Remnant contamination in soil and sediment within the AOC is considered a secondary source of contamination. The main secondary source that contains contamination within Atlas Scrap Yard is the soil at the former incinerator within the IA. The lead concentrations that exceed cleanup goals are confined to surface soil (0–1 ft bgs) with a concentration of 1,200 mg/kg.

Concentrations of inorganic SRCs in subsurface soil were observed above background concentrations throughout Atlas Scrap Yard. Generally, the greatest number of inorganic SRCs above background concentrations occurred in the 1–4 ft bgs interval, and concentrations decreased with depth.

The primary mechanisms for release of contaminants from secondary sources at the AOC are:

- Erosion of soil matrices with sorbed contaminants and mobilization in overland surface water storm runoff during heavy rainfall conditions; and
- Contaminant leaching to groundwater.

8.7.2 Contaminant Migration Pathways and Exit Points

8.7.2.1 Surface Water Pathways

Surface water at Atlas Scrap Yard occurs intermittently as stormwater runoff within natural and constructed drainage ditches or conveyances. Migration of contaminants from soil sources via surface water occurs primarily by: (1) movement of the particle-bound contaminants in surface water runoff; and (2) transport of dissolved constituents in surface water. In the case of particle-bound contaminant migration, contaminants will be mobilized during periods of high flow (e.g., rain events), and upon reaching portions of surface water conveyances where flow velocities decrease, they will settle out as sediment accumulation. Sediment-bound contaminants may become re-suspended and migrate during storm events or may partition to dissolved phase in surface water.

In the case of particle-bound contaminant migration, contaminants will be mobilized during periods of high flow (e.g., rain events). Upon reaching lowest elevation of the AOC where temporary ponding of water may occur, the particulates will settle out as sediment accumulation. Re-suspension and migration of sediment-bound contaminants from the low points in the AOC would not occur.

Dissolved phase contaminant migration in surface water is relevant with respect to leaching processes to groundwater. Temporary ponding of surface water runoff in the lowest points of the AOC is likely during heavy rainfall events or periods of snowmelt; however, visual observations during various investigations have not indicated evidence of long-term standing water. Infiltration rates and evapotranspiration processes appear sufficiently high to prevent long-term water retention.

8.7.2.2 Groundwater Pathways

The local potentiometric surface shows the groundwater flow pattern to the west, although facility-wide potentiometric data indicate flow to the southeast and southwest. The closest potential discharge

location is at an unnamed tributary to Cobbs Ponds, approximately 2,080 ft northeast of the AOC. An unnamed tributary to Sand Creek lies approximately 2,720 ft northwest of the AOC. The unnamed tributary to the Mahoning River (e.g., within Load line 4) lies about 2,700 ft southwest of the AOC. Groundwater elevations at Atlas Scrap Yard ranged from 967.54–973.63 ft amsl according to the January 2010 facility-wide potentiometric data presented in the *Facility-Wide Groundwater Monitoring Program Report on the January 2010 Sampling Event* (EQM 2010). Potentiometric data indicate the groundwater table occurs within the unconsolidated zone throughout the AOC. Groundwater discharge to surface water features (e.g., via base flow to streams or springs) does not occur within the AOC boundary.

The FWGWMP was initiated in 2005, and involves quarterly sampling of selected wells within the former RVAAP. Between 2009 and 2011, five different sampling events under the FWGWMP collected groundwater data at Atlas Scrap Yard. During these sampling events, various inorganic chemicals were detected and the limited detections of VOCs, pesticides, PCBs, and explosives were all at estimated concentrations below the laboratory reporting limits. Two samples had SVOC detections (benzoic acid and phenol) above the laboratory reporting limits.

Contaminant leaching pathways from soil to the water table are through poorly sorted, interbedded, silty clay loam and clay loam glacial till, with overall hydraulic conductivity average of 3.89E-04 cm/s. Based on the results of the SESOIL modeling, the maximum concentrations for 2-nitrotoluene; 3-nitrotoluene; 2,6-DNT; 2-amino-4,6-DNT; 4-amino-2,6-DNT; 2-methylnaphthalene; and naphthalene in leachate directly below the source and above the water table were above the respective screening criteria. These chemicals did not exceed the screening criteria at the downgradient receptor location (tributary to Cobbs Ponds) and were eliminated as CMCOCs. Observed groundwater concentrations at Atlas Scrap Yard provide confirmation of modeling results. Further evaluation of groundwater at the AOC will be performed in a separate report.

8.7.2.3 Sewer System

The sewers within the perimeter of Atlas Scrap Yard are being investigated and assessed as part of the Facility-wide Sewers AOC (RVAAP-67). Storm sewers are not present at Atlas Scrap Yard. The sanitary sewers in the Atlas Scrap Yard FA are part of the Sand Creek Sewage Treatment Plant Network. While cracks and joint separations within the sanitary sewer system are observed due to the advanced age of the system, the pipes are generally intact, which limits vertical migration from sewer sediment to the exterior of the piping system.

The compiled data provided effective characterization of the nature and extent of the contamination at the Atlas Scrap Yard FA, and no further sampling was recommended. All SRCs found in the subsurface sewer media samples within Atlas Scrap Yard FA, and evaluated through the stepwise fate and transport screening evaluation, were eliminated as posing future impacts to groundwater. The HHRA did not identify COCs at Atlas Scrap Yard FA for the National Guard Trainee or Resident Receptor. Since the Atlas Scrap Yard FA has no sewer outfalls, NFA was recommended from an ecological perspective.

8.7.3 Potential Receptors

Atlas Scrap Yard is located in the central portion of the facility and is currently used for railroad tie and salvaged inert materials storage. An evaluation using Resident Receptor (Adult and Child) FWCUGs was used to provide an Unrestricted (Residential) Land Use evaluation. Unrestricted (Residential) Land Use is considered protective for all categories of Land Use at Camp Ravenna. Additional human health receptors associated with Camp Ravenna are the National Guard Trainee and Industrial Receptor.

Camp Ravenna has a diverse range of vegetation and habitat resources. Habitats present within the facility include large tracts of closed-canopy hardwood forest, scrub/shrub open areas, grasslands, wetlands, open-water ponds and lakes, and semi-improved administration areas. Ecological receptors within An abundance of wildlife is present on the facility; 35 species of land mammals, 214 species of birds, 41 species of fish, and 34 species of amphibians and reptiles have been identified. Atlas Scrap Yard are potentially exposed to chemicals in surface soil (0-1 ft bgs) at concentrations exceeding ESVs.

8.7.4 Uncertainties

Uncertainties are inherent in the CSM depending on density and availability of data. The CSM for Atlas Scrap Yard is overall well defined using existing data, and major data gaps do not remain to be resolved. However, some uncertainties for the CSM include the following:

- The lack of established RVAAP-specific BSVs for identifying SRCs for PAHs is a source of uncertainty. Evaluating potential former RVAAP process-related sources and other common anthropogenic sources using available PAH environmental data minimizes the impact of this uncertainty on the conclusions of the RI.
- PCBs were not evaluated at the location of former Building T-4704 Roads and Grounds Maintenance Building. Documentation was not found that indicated if (and how much) materials containing PCBs were stored at this building; however, a 1956 figure labeled this building as a "Electrical Transmission Salv. Mat'l" building.
- While this RI addresses soil, sediment, and surface water, additional ongoing investigations are being conducted for the Facility-wide Groundwater and Facility-wide Sewers AOCs.

8.8 CONCLUSIONS OF THE REMEDIAL INVESTIGATION

Based on the investigation results, Atlas Scrap Yard has been adequately characterized and the recommended path forward is to proceed to an FS. The FS will evaluate remedial alternatives to address risks identified in the HHRA pertaining to PAHs in the ASA and lead in the former incinerator within the IA. These contaminated areas are presented on Figure 8-2.

Using benzo(a)pyrene as the representative PAH, remediation of surface soil (0–1 ft bgs) in ASA contaminated areas to 1.1 mg/kg would be required to attain Unrestricted (Residential) Land Use, 2.9 mg/kg to attain Commercial/Industrial Land Use, and 4.77 to attain Military Training Land Use. As discussed in the HHRA, PAHs are not COCs in the IA and do not require remediation.

For the former incinerator (sample ASYss-019M), remediation of lead in surface soil (0–1 ft bgs) is recommended to attain a cleanup goal of 400 mg/kg. Although the cleanup goal for the Industrial Receptor and National Guard Trainee is 800 mg/kg, the contamination is focused to one specific area. Consequently, attaining the Resident Receptor cleanup goal of 400 mg/kg should be the goal of the FS and subsequent remediation. Upon attaining a cleanup goal of 400 mg/kg, the entirety of the IA will have attained Unrestricted (Residential) Land Use.

In addition, to address any potential data gaps associated with this RI, the FS will recommend surface soil (0–1 ft bgs) sampling at the location of former Building T-4704 Roads and Grounds Maintenance Building for PCBs. Although there have not been document releases at this location and the previous use of this building is not well documented, additional sampling to assess if the previous use of the building contributed PCB contamination to soil may be warranted.

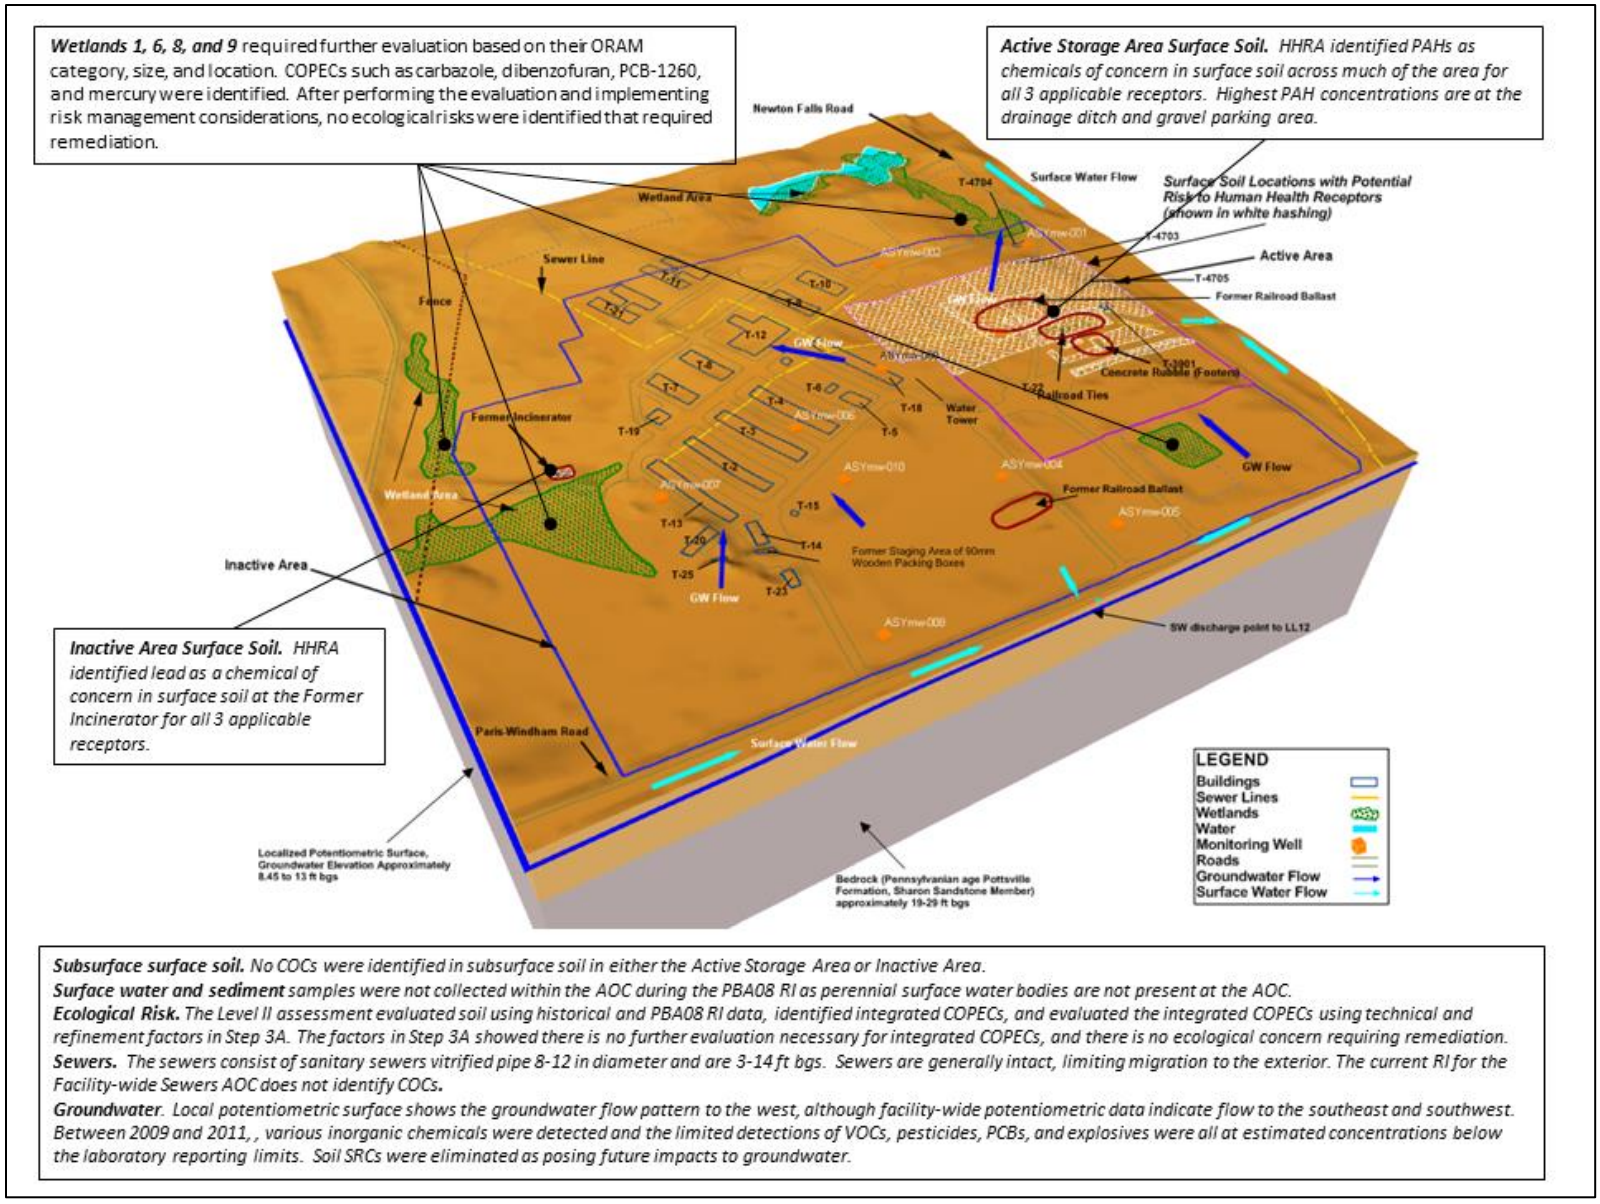


Figure 8–1. Atlas Scrap Yard Conceptual Site Model

THIS PAGE INTENTIONALLY LEFT BLANK

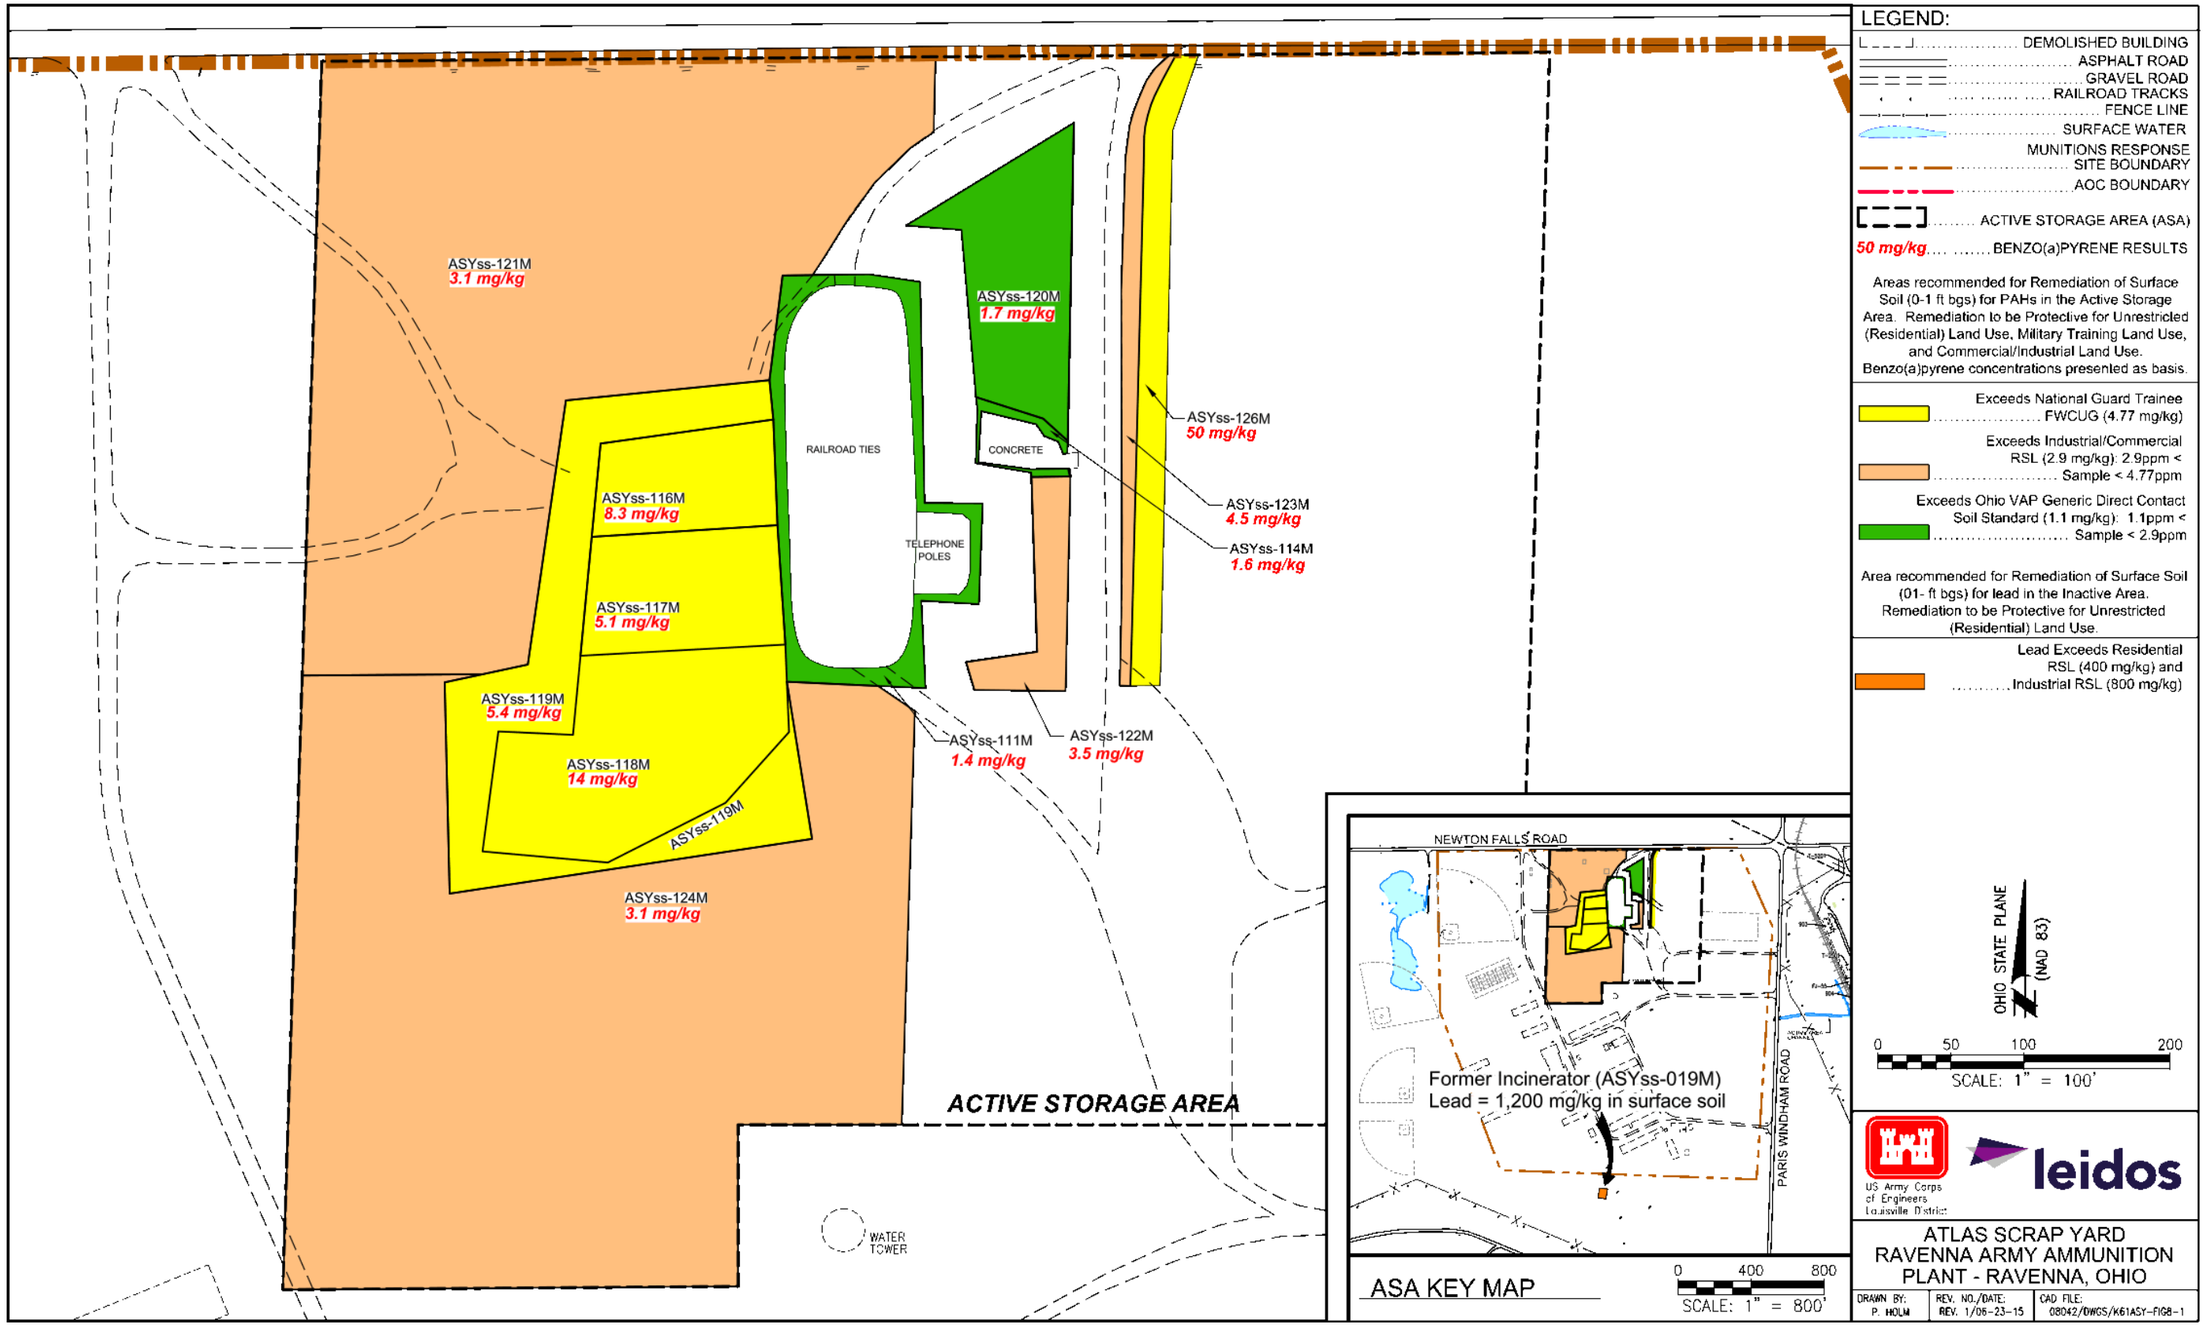


Figure 8–2. Contaminated Areas Requiring Remediation at Atlas Scrap Yard

THIS PAGE INTENTIONALLY LEFT BLANK

9.0 REFERENCES

American Cancer Society 2003. *Cancer Facts & Figures 2003*. Website: www.cancer.org. 2003.

ANRCP (Amarillo National Resource Center for Plutonium) 1999. *Bioremediation of RDX in the Vadose Zone Beneath the Pantex Plant*. January 1999.

Anonymous 1944. Construction Camp. Drawing BR 5448. December 8, 1944.

Army National Guard-ILE Cleanup, U.S. Army (ARNG) 2014. *Final Technical Memorandum: Land Uses and Revised Risk Assessment Process for the Ravenna Army Ammunition Plant (RVAAP) Installation Restoration Program, Portage /Trumbull Counties, Ohio (Tech Memo)*. (Memorandum between ARNG-ILE Cleanup and the Ohio Environmental Protection Agency; dated 4 February 2014).

ATSDR (Agency for Toxic Substances and Disease Registry) 1995. *Public Health Statement for Polycyclic Aromatic Hydrocarbons (PAHs)*. United States Department of Health and Human Services, Public Health Service. August 1995.

ATSDR 1997. *Toxicological Profile for HMX*. United States Department of Health and Human Services, Public Health Service. September 1997.

Bradley, L. J. N., B. H. McGee, and S.L. Allen 1994. *Background Levels of Polycyclic Aromatic Hydrocarbons (PAH) and Selected Metals in New England Urban Soils*. Journal of Soil Contamination, Volume 3, Issue 4. 1994.

BTAG (United States Army Biological Technical Assistance Group) 2005. *Technical Document for Ecological Risk Assessment: Process for Developing Management Goals*. August 2005.

CB&I 2014. *Remedial Investigation Report for RVAAP-050-R-01 Atlas Scrap Yard MRS at the Former Ravenna Army Ammunition Plant*. August 2014.

DOE (United States Department of Energy) 1992. *An Analytical Solution for Transient One-, Two-, or Three-Dimensional Transport in a Homogenous, Anisotropic Aquifer with Uniform, Stationary Regional Flow*. Oak Ridge National Laboratory, Oak Ridge, Tennessee. 1992.

DOE 1997. *Preliminary Remediation Goals for Ecological Endpoints*. Oak Ridge National Laboratory, Oak Ridge Tennessee. August 1997.

Dragun, James 1988. *The Soil Chemistry of Hazardous Materials*. Hazardous Materials Control Research Institute, Silver Spring, MD. 1988.

E2M (Engineering-environmental Management, Inc.) 2008. Site Inspection Report for the Military Munitions Response Program at the Ravenna Army Ammunition Plant. May 2008.

ECC (Environmental Chemical Corporation) 2015. Draft Site Inspection Report CC-RVAAP-72 Facility-wide Underground Storage Tanks. April 2015.

E2M (Engineering-environmental Management, Inc.) 2008. *Site Inspection Report for the Military Munitions Response Program at the Ravenna Army Ammunition Plant*. May 2008.

EQM (Environmental Quality Management, Inc.) 2010. *Facility-Wide Groundwater Monitoring Program Report on the January 2010 Sampling Event, Ravenna Army Ammunition Plant, Ravenna, Ohio*. July 2010.

ERDC (United States Army Engineer Research and Development Center) 2007. *Development of Environmental Data for Navy, Air Force, and Marine Munitions*. Cold Regions Research and Engineering Laboratory, Arlington, Virginia. June 2007.

Funk, S.B., et al. 1993. *Initial-Phase Optimization for Bioremediation of Munition Compound-Contaminated Soils*. Applied and Environmental Microbiology, Volume 59, No. 7. July 1993.

GSC (General Sciences Corporation) 1998. *SESOIL for Windows*, Version 3.0, Laurel, MD. 1998.

Hetrick, D. M., et al. 1986. *Model Predictions of Watershed Hydrologic Components: Comparison and Verification*. Journal of the American Water Resources Association. October 1986.

Hetrick, D.M. and S.J. Scott 1993. *The New SESOIL User's Guide*, Wisconsin Department of Natural Resources, PUBL-SW-200, Madison, WI. 1993.

IEPA (Illinois Environmental Protection Agency) 2005. Urban area polycyclic aromatic hydrocarbons study tiered approach to corrective action objectives. 2005.

ITRC (Interstate Technology & Regulatory Council). 2012. *Incremental Sampling Methodology*. ISM-1. Washington, D.C.: Interstate Technology & Regulatory Council, Incremental Sampling Methodology Team. www.itrcweb.org.

Kammer, H.W. 1982. *A Hydrologic Study of the Ravenna Arsenal, Eastern Portage and Western Trumbull Counties, Ohio*. Master Thesis, Kent State University. 1982.

Kaplan, D.L. and A.M. Kaplan 1982. *Thermophilic biotransformation of 2,4,6-trinitrotoluene under simulated composting conditions*. Applied and Environmental Microbiology, 44(3). May 1982.

Lyman, Warren J., et al. 1990. *Handbook of Chemical Property Estimation Methods*. American Chemical Society, Washington, D.C. 1990.

MADEP (Massachusetts Department of Environmental Protection) 2002. *Background Levels of Polycyclic Aromatic Hydrocarbons and Metals in Soil*. May 2002.

McCormick, et al. 1978. *Identification of Biotransformation Products from 2,4-Dinitrotoluene*. Applied and Environmental Microbiology, Volume 35, Issue 5. May 1978.

McCormick, N. G., J. H. Cornell, and A. M. Kaplan 1981. *Biodegradation of Hexahydro-1,3,5-Trinitro-1,3,5-Trazine*. Applied and Environmental Microbiology. November 1981.

MKM (MKM Engineers, Inc.) 2004. Sampling and Analysis Plan Addendum for the *Characterization of 14 RVAAP AOCs at the Ravenna Army Ammunition Plant, Ravenna, Ohio.* October 2004

MKM 2007. *Characterization of 14 AOCs at Ravenna Army Ammunition Plant.* March 2007.

NDEP (Nevada Division of Environmental Protection) 2006. *Selection of Pyrene as a Noncarcinogenic Toxicological Surrogate for PAHs. Technical memorandum from T.L. Copeland DABT (consulting toxicologist) to B. Rakvica P.E. NDEP Bureau of Corrective Actions)*. February 2006.

NYSDEC (New York State Department of Environmental Conservation) 2006. *New York State Brownfield Cleanup Program Development of Soil Cleanup Objectives Technical Support Document*. September 2006.

ODNR (Ohio Department of Natural Resources) 2010. Spatial Predictions of Arsenic Background Concentrations in Soil, Ohio. April 2010.

OGE (O'Brien and Gere Engineers, Inc.) 1988. *Hazardous Waste Site Remediation, the Engineer's Perspective*. 1988.

OHARNG 2014. *Integrated Natural Resources Management Plan at the Camp Ravenna Joint Military Training Center, Portage and Trumbull Counties, Ohio*. December 2014.

Ohio EPA (Ohio Environmental Protection Agency) 1996. *Draft Evaluation of Background Metal Concentrations in Ohio Soils.* June 1996.

Ohio EPA 2001. *Ohio Rapid Assessment Method for Wetlands v. 5.0, User's Manual and Scoring Forms*. Division of Surface Water, 401/Wetland Ecology Unit. February 2001.

Ohio EPA 2003. *Guidance for Conducting Ecological Risk Assessments (Ohio EPA)*. Division of Emergency and Remedial Response. February 2003.

Ohio EPA 2004. *Director's Final Findings and Orders for the Ravenna Army Ammunition Plant*. June 2004.

Ohio EPA 2008. *Guidance for Conducting Ecological Risk Assessments (Ohio EPA)*. Division of Emergency and Remedial Response. April 2008.

Petranka, J. W. 1998. *Salamanders of the United States and Canada.* Smithsonian Institution Press, Washington D.C., 587 pp. 1998.

Pfingsten, Ralph A. 2009. The History of the Ravenna Arsenal. 2009.

RVAAP (Ravenna Army Ammunition Plant) 2013. *DNT Isomers, RVAAP-66 Facility-wide Groundwater, Ravenna Army Ammunition Plant, Ravenna, Ohio*. Memorandum from Mark Patterson, RVAAP Facility Manager to Eileen Mohr, Ohio EPA. March 25, 2013.

Shacklette, H.T., and Boerngen, J.G., 1984. *Element concentrations in soils and other surficial materials of the conterminous United States*: U.S. Geological Survey Professional Paper 1270. 1984.Teaf, Christopher M.; Douglas J. Covert; and Srikant R. Kothur 2008. *Urban Polycyclic Aromatic Hydrocarbons (PAHS): A Florida Perspective.* Proceedings of the Annual International Conference on Soils, Sediments, Water and Energy: Volume 13, Article 23. 2008.

USABRDL (United States Army Biomedical Research and Development Laboratory) 1989. *Organic Explosives and Related Compounds: Environmental and Health Considerations*. March 1989.

USACE (United States Army Corps of Engineers) 1994. *Evaluation of Pre-extraction Analytical Holding Times for Tetryl in Soil.* April 1994.

USACE 1998. *Phase I Remedial Investigation Report for High-Priority Areas of Concern at the Ravenna Army Ammunition Plant, Ravenna Ohio.* February 1998.

USACE 1999. *Plant Community Survey for the Ravenna Army Ammunition Plant Summary Report*. Prepared for Ohio Army National Guard, Adjutant General's Department, Columbus, Ohio. August 1999.

USACE 2001a. *Facility-Wide Sampling and Analysis Plan for Environmental Investigations at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 2001.

USACE 2001b. *Phase II Remedial Investigation Report for the Winklepeck Burning Grounds at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. April 2001.

USACE 2003a. *Phase II Remedial Investigation Report for the Load Line 1 at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. June 2003.

USACE 2003b. *RVAAP Facility Wide Ecological Risk Work Plan*. April 2003.

USACE 2004. *Phase II Remedial Investigation Report for Load Line 12 at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 2004.

USACE 2005a. *Facility-Wide Biological and Water Quality Study 2003 Ravenna Army Ammunition Plant, Ravenna, Ohio, Part I-Streams, Part II-Ponds*. November 2005.

USACE 2005b. *RVAAP Facility-Wide Human Health Risk Assessor Manual – Amendment 1*. December 2005.

USACE 2006. *Environmental Transport and Fate Process Descriptors for Propellant Compounds*. June 2006.

USACE 2009. *PBA 2008 Supplemental Investigation Sampling Analysis Plan Addendum No. 1 Ravenna Army Ammunition Plant, Ravenna, Ohio*. December 2009.

USACE 2010a. *Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, RVAAP, Ravenna, Ohio*. March 2010.

USACE 2010b. *Risk Assessment Handbook Volume II: Environmental Evaluation*. December 2010.

USACE 2010c. *Phase III Remedial Investigation Report for Sediment and Surface Water at the RVAAP-12 Load Line 12 at the Ravenna Army Ammunition Plant, Ravenna, Ohio.* December 2010.

USACE 2011. *Historical Records Review Report for the 2010 Phase I Remedial Investigation Services at Compliance Restoration Sites (9 Areas of Concern)*. December 2011.

USACE 2012a. *Phase III Remedial Investigation Report and Feasibility Study for Soil, Sediment, and Surface Water at RVAAP-29 Upper and Lower Cobbs Ponds.* 2012.

USACE 2012b. *Phase III Remedial Investigation Report for Wet Sediment and Surface Water at RVAAP-12 Load Line 12*. 2012.

USACE 2012c. *Revised Final United States Army Corps of Engineers Ravenna Army Ammunition Plant (RVAAP) Position Paper for the Application and Use of Facility-Wide Human Health Cleanup Goals*. February 2012.

USACE 2012d. *Draft Remedial Investigation/Feasibility Study Report for RVAAP-67 Facility-Wide Sewers.* September 2012.

USACHPPM (United States Army Center for Health Promotion and Preventative Medicine) 1998. *Relative Risk Site Evaluation for Newly Added Sites at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. Hazardous and Medical Waste Study No. 37-EF-5360-99. October 1998.

USACHPPM 2000. *Wildlife Toxicity Assessment for 2,4,6-Trinitrotoluene*. November 2000.

USACHPPM 2001a. *Wildlife Toxicity Assessment for High Melting Explosive (HMX).* November 2001.

USACHPPM 2001b. *Wildlife Toxicity Assessment for 1,3,5-Trinitrobenzene.*November 2001.

USATHAMA (United States Army Toxic and Hazardous Materials Agency) 1978. *Installation Assessment of Ravenna Army Ammunition Plant, Records Evaluation Report No. 132*. November 1978.

USDA (United States Department of Agriculture) 1978. *Soil Survey of Portage County, OH*. 1978.

USDA 2009. *Forest Service. Resource Bulletin NRS-36*. http://www.nrs.fs.fed.us/. 2009.

USDA 2010. *Soil Map of Portage County, Version 4*. Website: www.websoilsurvey.nrcs.usda.gov. January 2010.

USDA 2011. *Natural Resources Conservation Service. PLANTS database*. http://plants.usda.gov. November 2011.

USEPA (United States Environmental Protection Agency) 1985. *Water Quality Assessment: A Screening Procedure for Toxic and Conventional Pollutants in Surface and Ground Water, Revised 1985 Parts 1 and 2, EPA/600/6-85/002*. Office of Research and Development, Environmental Research Laboratory, Athens, Georgia. September 1985.

USEPA 1987. *Health Advisory for Nitrocellulose*. Office of Drinking Water. September 1987.

USEPA 1988. *Health Advisory for Octahydro-1,3,5,7-Tetranitro 1,3,5,7-Tetrazocine (HMX).* PB90-273525. Office of Drinking Water. November 1988.

USEPA 1989. *Risk Assessment Guidance for Superfund, Volume 1: Human Health Evaluation Manual (Part A)*. December 1989.

USEPA 1990. *National Oil and Hazardous Substances Pollution Contingency Plan, Final Rule*, FR Vol. 55, No. 46, available from U.S. Government Printing Office, Washington, D.C. March 1990.

USEPA 1991. *Risk Assessment Guidance for Superfund: Volume I – Human Health Evaluation Manual (Part B, Development of Risk-based Preliminary Remediation Goals).* EPA/540/R-92/003, U.S. Environmental Protection Agency Office of Emergency and remedial Response, Washington, DC. December 1991.

USEPA 1993. *Wildlife Exposure Factors Handbook.* Office of Research and Development, Washington, D.C., Volume 1 of 2. December 1993.

USEPA 1994. *The Hydrologic Evaluation of Landfill Performance (HELP) Model: Engineering Documentation for Version 3*. EPA/600/R-94/168b, U.S. Environmental Protection Agency Office of Research and Development, Washington, DC. September 2004.

USEPA 1996a. *Ecological Significance and Selection of Candidate Assessment Endpoints*. ECO Update. Volume 3, Number 1. EPA 540/F-95/037. January 1996.

USEPA 1996b. *Soil Screening Guidance: Technical Background Document*. Office of Solid Waste and Emergency Response, Washington, D.C. May 1996.

USEPA 1997. *Ecological Risk Assessment Guidance for Superfund: Process for Designing and Conducting Ecological Risk Assessments*. Interim Final. June 1997.

USEPA 1999. *Ohio Wetland Restoration and Mitigation Strategy Blueprint.* Wetland Grant Program Federal Grant No. CD985853-01-0. Prepared by Ohio Department of Natural Resources and Ohio Environmental Protection Agency. September 1999.

USEPA 2000. *Amended Guidance on Ecological Risk Assessment at Military Bases: Process Considerations, Timing of Activities, and Inclusion of Stakeholders*. Website: http://www.epa.gov/region4/waste/fedfac/ecoproc2.pdf. June 2000.

USEPA 2001. *Supplemental Guidance to RAGS: Region 4 Bulletins, Ecological Risk Assessment*. Originally published November 1995. Website: http://www.epa.gov/region4/waste/ots/ecolbul.html. November 2001.

USEPA 2003a. *Ecological Soil Screening Level for Aluminum*. OSWER Directive 9285.7-60. November 2003.

USEPA 2003b. *Region 5 RCRA Ecological Screening Levels*. http://www.epa.gov/reg5rcra/ca/ESL.pdf. August 2003.

USEPA 2005a. *Ecological Soil Screening Levels for Cadmium*. OSWER Directive 9285.7-65. March 2005.

USEPA 2005b. *Ecological Soil Screening Levels for Lead*. OSWER Directive 9285.7-70. March 2005.

USEPA 2007a. *Guidance for Developing Ecological Soil Screening Levels Attachment 4-1: Exposure Factors and Bioaccumulation Models for Derivation of Wildlife Eco-SSLs*. OSWER Directive 9285.7-55. April 2007.

USEPA 2007b. *Ecological Soil Screening Levels for Zinc*. OSWER Directive 9285.7-73. June 2007.

USEPA 2007c. *Ecological Soil Screening Levels for Manganese*. OSWER Directive 9285.7-71. April 2007.

USEPA 2007d. *Ecological Soil Screening Levels for Selenium* OSWER Directive 9285.7-72. July 2007.

USEPA 2010. *Integrated Risk Information System (IRIS) Database*. Office of Research and Development, Washington, D.C. 2010.

USEPA 2011. *Western Ecology Division. Ecoregions of EPA Region 3*. http://www.epa.gov/wed/pages/ecoregions/reg3_eco.htm. 2011.

USEPA 2012. EPA Regional Screening Level (RSL). Website: http://www.epa.gov/reg3hwmd/risk/human/rb-concentration_table/index.htm. November 2012.

USFS (United States Forest Service) 2011. *Forest Inventory Data Online (FIDO). Forest Inventory and Analysis National Program*. http://www.fia.fs.fed.us/tools-data/default.asp. February 2011.

USGS (United States Geological Survey) 1968. *Mineral Resources of the Appalachian Region*. U.S. Geological Survey Professional Paper No. 580. 1968.

USGS 2004. *U.S. Geological Survey Certificate of Analysis Devonian Ohio Shale, SDO-1*. Online: <http://minerals.cr.usgs.gov/geo_chem_stand/ohioshale.html>. December 2004.

Vosnakis, Kelly A.S., and Perry, Elizabeth, 2009. *Background Versus Risk-Based Screening Levels – An Examination of Arsenic Background Soil Concentrations in Seven States*. International Journal of Soil, Sediment, and Water. Volume 2, Issue 2, Article 2. August 2009.

Weston Solutions, Inc., 2012. *Background Soil Determination Summary for Three Locations in Cuyahoga County, Ohio.* USEPA Region V, Chicago, IL and Ohio EPA Division of Environmental response and Revitialization, Twinsburg, OH. July 2012.

Wilbur, Watson, and Associates Architects and Engineers. Ravenna Ordnance Plant, Construction Camp Utilities Map; Plan number 6934: 1075.1. February 2, 1942.

Winslow, J.D., and G.W. White, 1966. *Geology and Ground-water Resources of Portage County, Ohio*. Geological Survey Professional Paper. 1966.